

carisa[®]



DESIGNER'S BOOK
2025



Art of Heat

Carisa Designer Radiator Collections

Luxury
COLLECTION

A highly distinctive collection of uniquely designed radiators, allowing you to express your individuality and bring warmth to your home.

PREMIUM
COLLECTION

A superior range of products with exceptional styling and high-quality finishes. The perfect accompaniment to any living space.

REDHOT
COLLECTION

The Red Hot range follows the latest trends in style, design and choice. Attractive radiators, readily available in a choice of sizes and finishes.

ULTRASLIM
COLLECTION

The slenderness of the Ultra Slim radiator compliments a contemporary home without compromising on efficiency.

ELECTRIC
COLLECTION

Convenient instant control. Efficient warmth wherever you need it. A simple and reliable way to heat your living space in style.


carisa®

EN 442

TSE

CE

UK
CA

PG

The World is changing, and so is heating technology...

We live in a world where adding value is crucial and increasingly difficult to achieve. Aspiring to be the best in all that we do and with all that we have, drives us to add value by using two important elements; design and technology.

In life and in business, building competitive advantage in our increasingly fast-moving, information-rich world of global excess is not easy, and technology alone is not always sufficient. Today's leaders have gone beyond using technology for its own sake, and instead have simplified how we deliver innovation to consumers in a desirable and easy to use way.

Design led businesses use their expertise to create distance between themselves and their competitors. This gives their customers compelling reasons to purchase their products and as such, businesses cannot stand still. They constantly endeavour to find better ways to use this advantage to satisfy their audience.

At Carisa we are constantly striving to deliver unique designs using cutting edge technology and new materials. Carisa is a UK brand distributed by Carisa Radiators Ltd that utilises innovation and design to drive the heating market. Carisa is created by our experienced research and development team who have led the heating market for over 48 years.

The Carisa range of designer radiators, towel warmers and accessories combine the latest trends and technological ideas to deliver beautiful, functional and desirable pieces of art for your home. Our products adorn homes, hotels and other commercial and architectural projects around the world.

Carisa offers an unrivalled range in terms of sizes, design and colour options and along with our bespoke product service offers you, the customer, truly endless opportunities.

Choose the best in life.....Choose CARISA

Why Carisa?

WHY CHOOSE CARISA ALUMINIUM DESIGN RADIATORS?

Aluminium radiators should be the first choice choice for use with heat pumps. Aluminium is an incredibly high heat conductor, which means that our radiators heat up very quickly and heat into the room far more quickly than mild, stainless steel or cast iron.

Aluminium radiators require much less water content another factor in the quick heat up period. Which means you will be spending less on your energy bills. In fact, you could save up to 10% on energy bills with an aluminium radiator!

If heat output and energy efficiency is important, then you'll want to look at aluminium radiators. They offer great heat output and are very efficient, this combined with our designers makes aluminium a very efficient beautiful form of heat for every room.

Weight, high thermal conductivity and longevity of service are just a few things that make Carisa aluminium products a must.

WEIGHT As it is 70% lighter than mild steel, it helps reduce unnecessary weight on non-structural walls.

HIGH PRESSURE CAPACITY Due to our manufacturing techniques they are safe to use under pressures way beyond those normally encountered in the UK and Europe.

SMOOTH SURFACE By using tribo paint technology and anodised coatings our products have longevity and are easy to clean and maintain.

UNIQUE DESIGN Our designs speak for themselves. They add value, style and grace in any situation.

COLOUR OPTIONS Available in many different colour options, anodised and even in a range of wooden wrap finishes.

CONSTRUCTION The combination of exciting extruded shapes together with our manufacturing system guarantees a long life span.

CUSTOM OPTIONS Don't limit yourself to our already extraordinary range of sizes and shapes. We can manufacture sizes from 200mm to 3000mm high and up to 3000mm wide. The world really is your oyster!

CUSTOM CONNECTIONS We build our products with multiple pipe connection options for easy installation. We also offer a fully customised service for those difficult situations.

ENVIRONMENTALLY FRIENDLY 100% recyclable. Low water content means lower energy costs and up to 26% greater performance than a comparable steel radiator.

HIGH QUALITY 5 years guarantee against manufacturing defects and leakage.

WHY CARISA STAINLESS STEEL DESIGNER RADIATORS?

The world's best radiator designers use world class materials and there are few better materials than stainless steel. The knowledge that your radiator is protected from defects and corrosion together with our longer product guarantees, leaves you feeling warm on the inside as well as the outside.

Whether the material is a highly polished, mirror-like surface or brush treated, stainless steel radiators offer the best of both worlds. Beautiful modern aesthetics combined with the durability and quality to stand the test of time.

Our range of towel warmers and radiators are all made from 100% stainless steel. There is no additional finish to corrode, flake or discolour; simple cleaning is all that is required.

Our stainless steel is made from 90% recycled material and the product itself is 100% recyclable.

Carisa's range of products are finished to the highest standard and will last a lifetime. We use only 304 grade stainless steel with 316 welds. Manufactured in a totally hygienic environment, you can rest assured you are making an ethical and durable choice.

Carisa's design team has created a broad yet unique range of products, which are sure to enhance any interior.

Only the highest grade solid stainless steel is used by Carisa Designer Radiators. All joints are welded using advanced 'TIG' welding technology and using argon gas to avoid leakage. All Carisa products are tested to at least 13 bars of pressure and a pickling passivation process is applied to all products following the welding process.

All radiators are hand made by skilled artisans and each process is carefully quality controlled ensuring you receive only the very best products.

Carisa has been manufacturing stainless steel radiators for almost 20 years.

WHY FLAT STEEL DESIGNER RADIATORS?

Carisa keeps on innovating! Our striking new ultra slim steel panel radiators are special in many ways.

They are only 7 mm thick but still perform beyond expectation.

They feature 50 mm central connections; ideal for separate valves or the monoblock valves which are becoming more popular. A range of towel bar accessories are available to 'upgrade' you to a multifunctional product.

There is a 40 cm area available to you to design your own cut outs.

WHY ELECTRIC DESIGNER RADIATORS?

Carisa has combined the elegance, design and efficient heating conductivity of aluminium with a smart control system in our all new 'Smart Electric' radiators series.

Carisa electric radiators present a different choice of electric heating such as Dry Smart Electric and Hybrid Smart Electric radiators.

- Dry Smart Electric is a way of heating in a smart and efficient way. No boiler or central heating connections required. (Ecodesign Lot20 compliant)

- Hybrid Smart Electric Radiators are a transformation of traditional central heating radiators. These radiators are integral to the central heating system and also connected to the electricity supply. So in summer when the central heating is off you can have heat at the flick of a switch; now that is smart electric heating. (Ecodesign Lot20 compliant)

INDEX

Luxury COLLECTION

ADAGIO	10-11
UNIQUE	12-13
LINK FLOOR	16-17
LINK	18-19
TRIA	20-21
PIANO	22-23
MAGICO	26-27
MAGICO DOUBLE	28-29
CURVY	30-31
MOTION	34-35
SKULLY	38-39
ALVEOLE	42-43
AIDEN	44-45
ZIGGY	48-49
SNOWFLAKE	50-51
MAGICO BATH	52-53
CURVY BATH	54-55
JACOBS F	58-59
JACOBS W	60-61
VIVEK	64-65

MISTRAL	68
MISTRAL F	69
KEOPS	70
ODESSA	71
QUADRO	72
CIRCLES	73
SOPHIA MIRROR	74
STEP MIRROR	75
ENTREE	76
BURANO MIRROR	77
TALLIS MIRROR	78-79
KARO	80
TUBO	81
ELVINO	82-83
ELVINO FLOOR DOUBLE	84
ELVINO FLOOR	85
NIXIE	86-87
GAIA	88-89
VESTA	90-91
OTTO	92-93
MOSCOW	94-95
MOSCOW C	96-97
MOSCOW D	98-99
TUBULOUS	100-101
PIPETTE	102-103
SOPHIA	104-105
SOPHIA XL	106
DORA	107
HALO	108
OZ	109
KNIGHT	110
DOMINO	111
RUMA	112
CASTOR	113
ADORE	114
ALIAS	115
ARLEN	116
IBIZA	117
PAPILLION BATH	118
ELVINO BATH MIRROR	119
ELVINO BATH	120
PLAY BATH	121
UNICO	122
TERRA	123
TERRA L	124
MOON	125
MOON L	126
NIXIE BATH	127
KENSINGTON	128-129
MAGNUS W	130
MAGNUS F	131

PREMIUM COLLECTION

REDHÖT

COLLECTION

VERSAILLES	134
SARP	135
NEMO DOUBLE	136-137
MONZA DOUBLE	138-139
NEMO XL DOUBLE	140
MONZA XL DOUBLE	141
NEMO	142-143
MONZA	144-145
NEMO XL	146
MONZA XL	147
SLIM	148-149
STEP	150-151
BURANO	152-153
TALLIS DOUBLE	154-155
TALLIS	156-157
TALLIS XL DOUBLE	158
TALLIS XL	159
CHAMBORD DOUBLE	160-161
CHAMBORD	162-163
ANGERS DOUBLE	164-165
ANGERS	166-167
PLATA DOUBLE	168-169
PLATA	170-171
DUNE	172
BURANO S	173
MACK	174
ELITE	175
TALENT	176
PAROS	177
AREN	178
BARO	179
PAN	180
SWING	181
IVOR	182
VIVI	183
BECK	184
CLASH	185
GLOBUS	186
QUADRATA	187
GRACE	188
ELEGANS	189
ECLIPSE	190
AJAX I-II	191
ALYA BATH	192
NINOVA BATH	193
MACK BATH	194
MACK BATH H	195
PLATA BATH	196
PLATA BATH DOUBLE	197
FAME	198
FAME H	199
FRAME	200
BURTON	201
BARON L	202
LARA L	203
SOLEIL	204
LIGNE	205
SOHO	206
MAYRA	207
ZARA	208
EDWARD	209
VICTORIA	210
VINTAGE	211
ALDO	212
ETAGE	213
FLORIS	214
NILE	215

ULTRA SLIM

COLLECTION

COVENTRY	218
CROYDON	219
DUBLIN	220
GLASGOW	221
HAMLETS	222
LYMM	223
MANCHESTER	224
PLYMOUTH	225
REX	226
STIRLING	227
ROCHESTER	228-229


BOREAS N	234-235
BOREAS N MIRROR	236-237
BOREAS HYBRID N	238-239
BOREAS B	240-241
BOREAS B MIRROR	242-243
BOREAS HYBRID B	244-245
BOREAS S	246-247
BOREAS S MIRROR	248-249
BOREAS HYBRID S	250-251
BOREAS M	252-253
BOREAS HYBRID M	254-255
BOREAS FLAT	256-257
BOREAS FLAT TOWEL HOLDER	258-259
BOREAS FLAT MIRROR	260-261
BOREAS NOTUS V	262-263
BOREAS NOTUS Z	264-265
BOREAS NOTUS S	266-267
OTTO S	268
VESTA S	269
MAXIM	270
DANTE	271
FELIX	272
VERO	273
NEO	274

Luxury


COLLECTION



ADAGIO	10-11
UNIQUE	12-13
LINK FLOOR	16-17
LINK	18-19
TRIA	20-21
PIANO	22-23
MAGICO	26-27
MAGICO DOUBLE	28-29
CURVY	30-31
MOTION	34-35
SKULLY	38-39
ALVEOLE	42-43
AIDEN	44-45
ZIGGY	48-49
SNOWFLAKE	50-51
MAGICO BATH	52-53
CURVY BATH	54-55
JACOBS F	58-59
JACOBS W	60-61
VIVEK	64-65

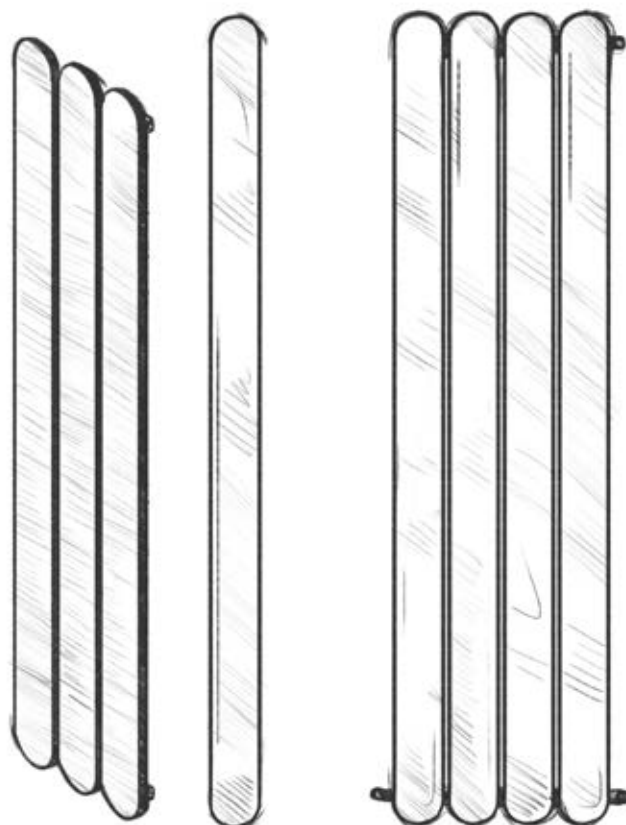



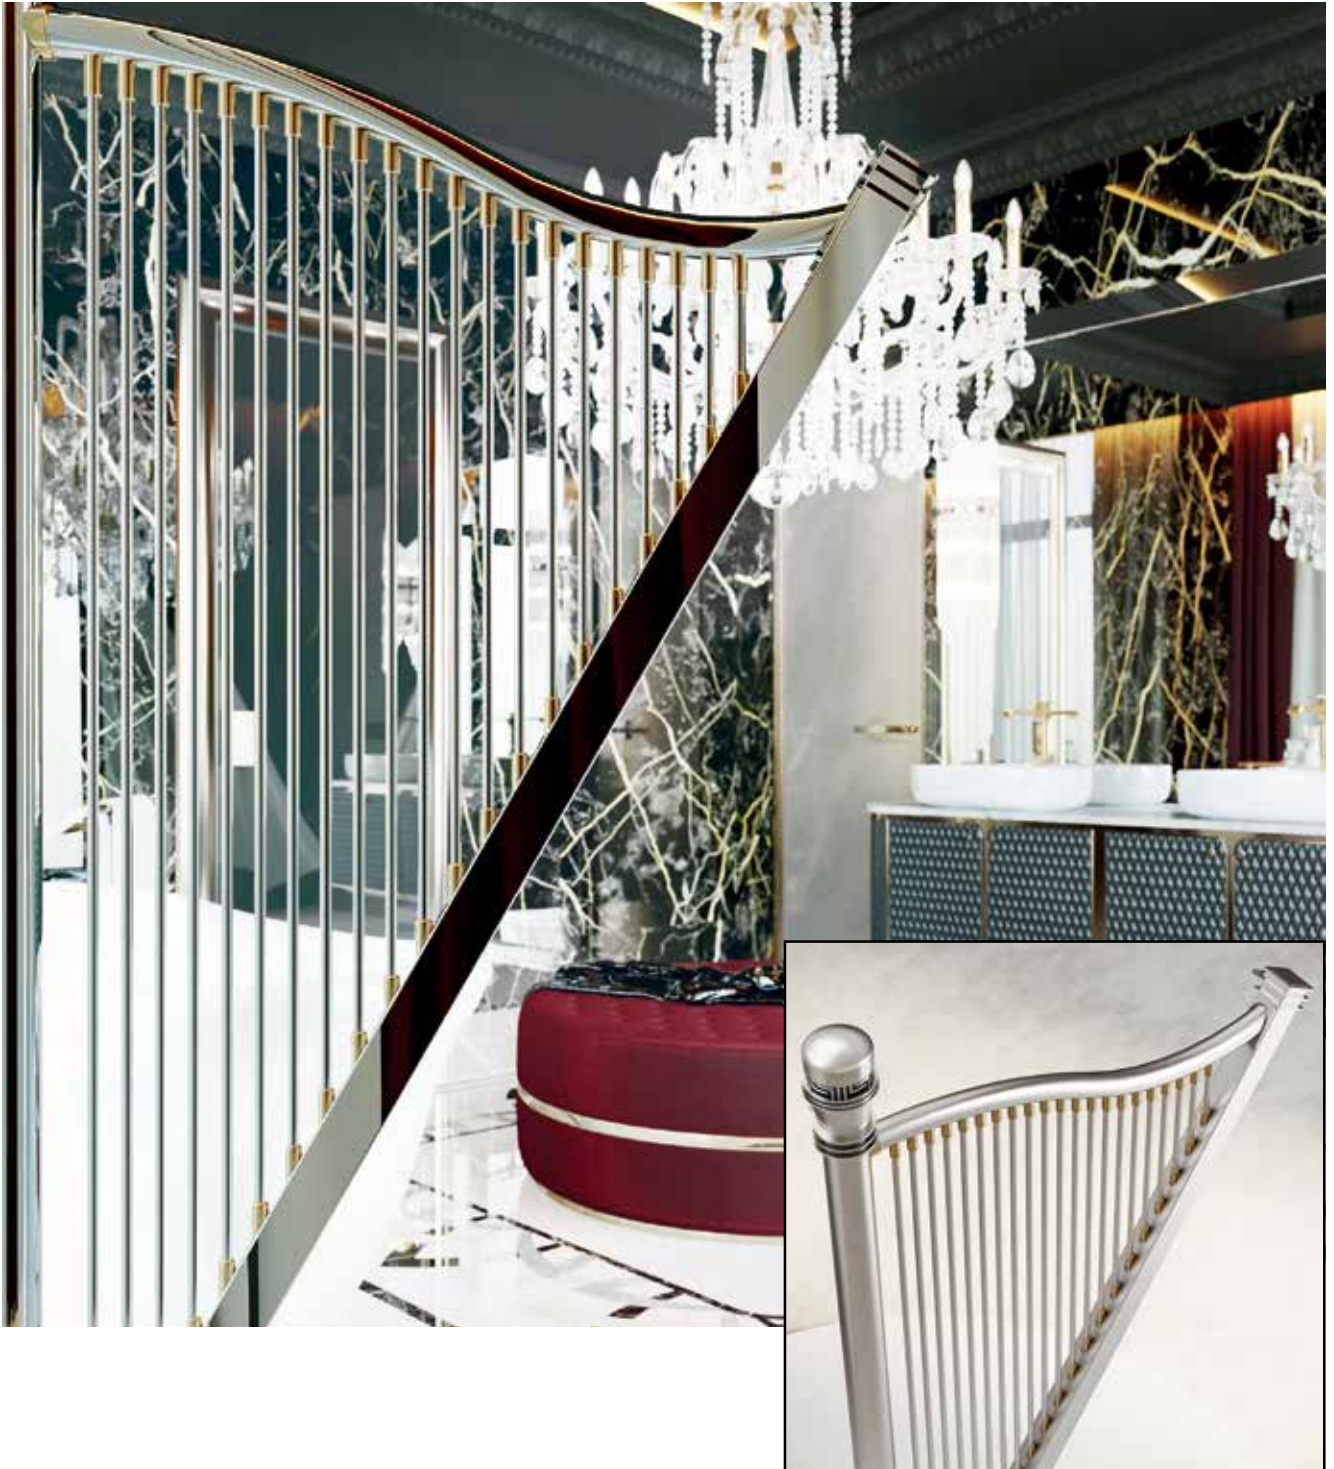

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
11ADA2000115021	2000	1150	21	50	22,0	8,1	D	714	2434	3744



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar




Max. Working Temperature
95°C



Connections
1/2"





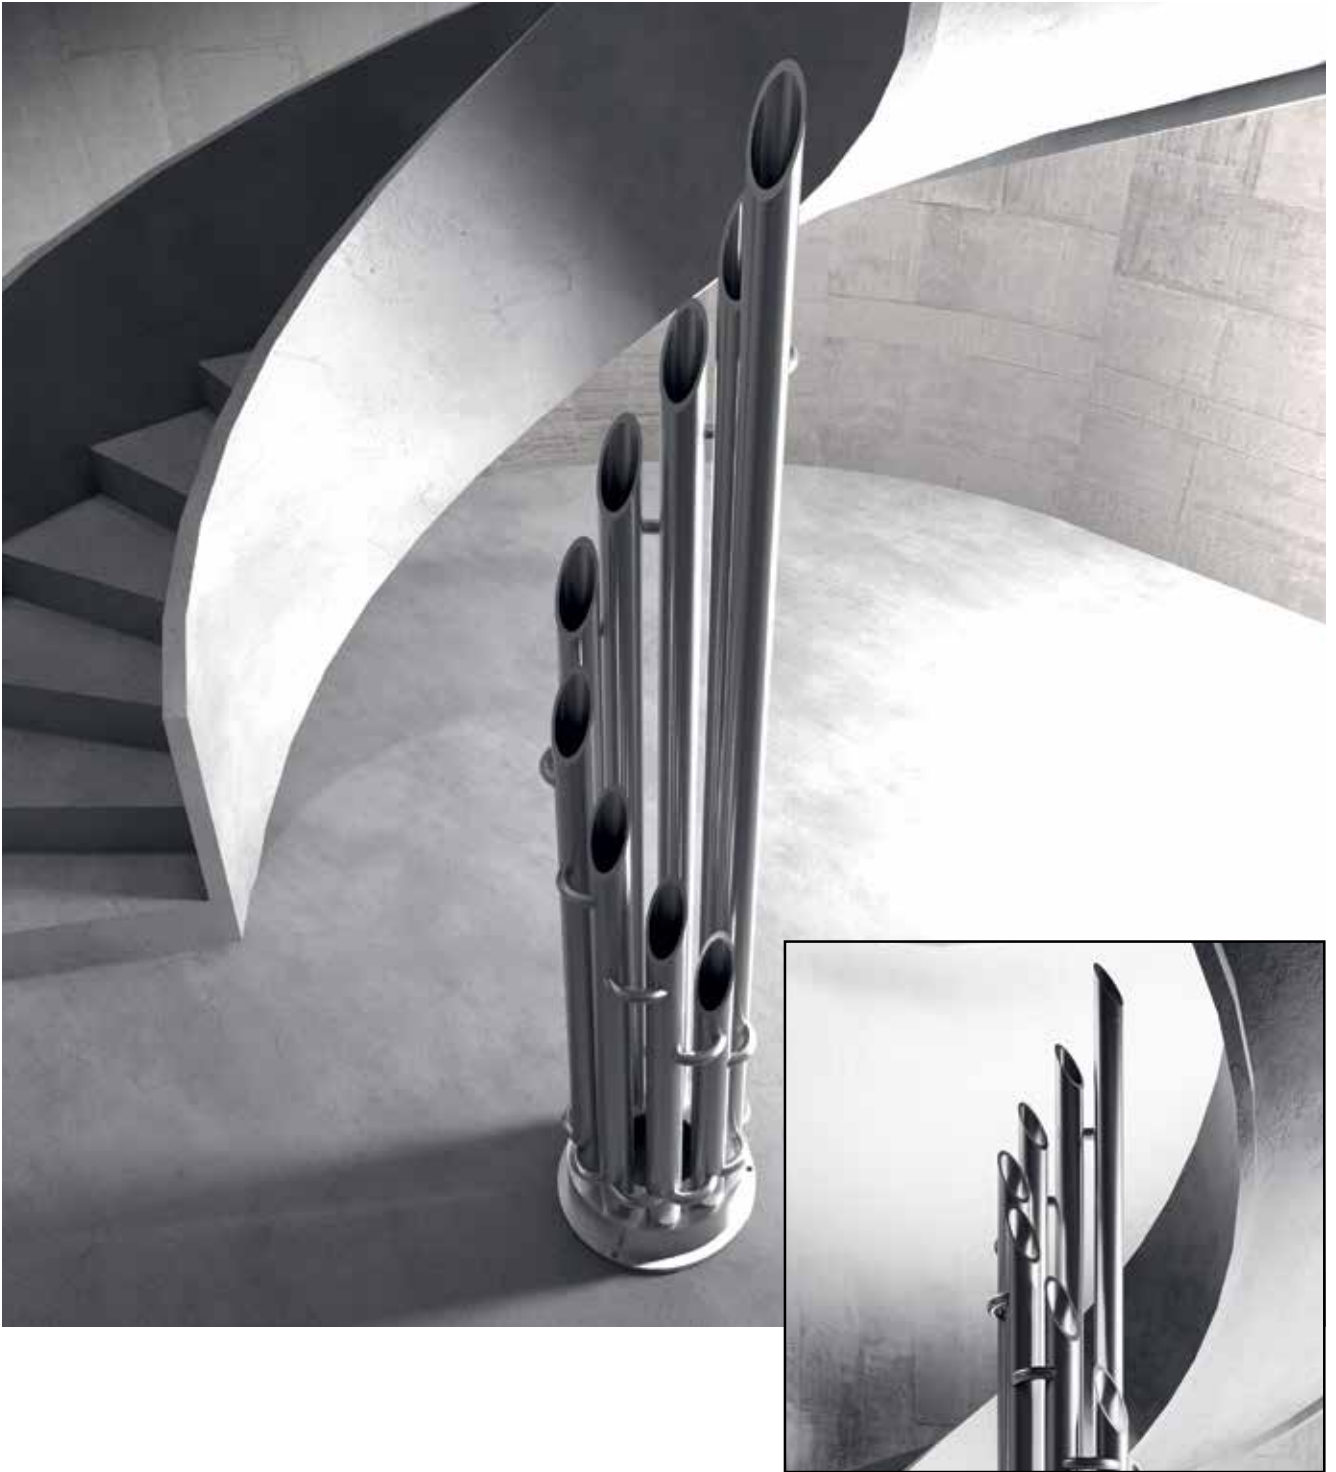





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
11UNQ1900036009	1900	360	9	50	45,6	9,7	C	688	2347	3611

 Material
Stainless Steel

 Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"



A young man with dark hair, shirtless and wearing a chain necklace, sits on the ground in a forest. He is looking towards a large, shiny metal chain hanging from a tree trunk. The chain consists of several large, oval-shaped links. The background is a dense forest with moss-covered tree trunks and fallen leaves on the ground.

You may have flaws in life
You can repair them
Connect and release them
Link with love

LINK... LOVE IT



Scan for commercial video











Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
11LNF2300024007	2300	240	7	180	18,5	10,4	C	516	1758	2704

 Material
Stainless Steel

 Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
11LNK0830024003	830	240	3	590	80-100	290-310	6,0	3,6	C	177	603	927
11LNK1300024005	1300	240	5	1050	80-100	290-310	10,0	6,1	C	295	1005	1546
11LNK1835024007	1835	240	7	1585	80-100	290-310	14,0	8,5	C	412	1406	2164



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar



Max. Working Temperature
95°C



Connections
1/2"











Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
11TRA1800050021	1800	500	21	50	287	562	15,8	6,5	C	551	1877	2888

 Material
Stainless Steel

 Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces


 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"





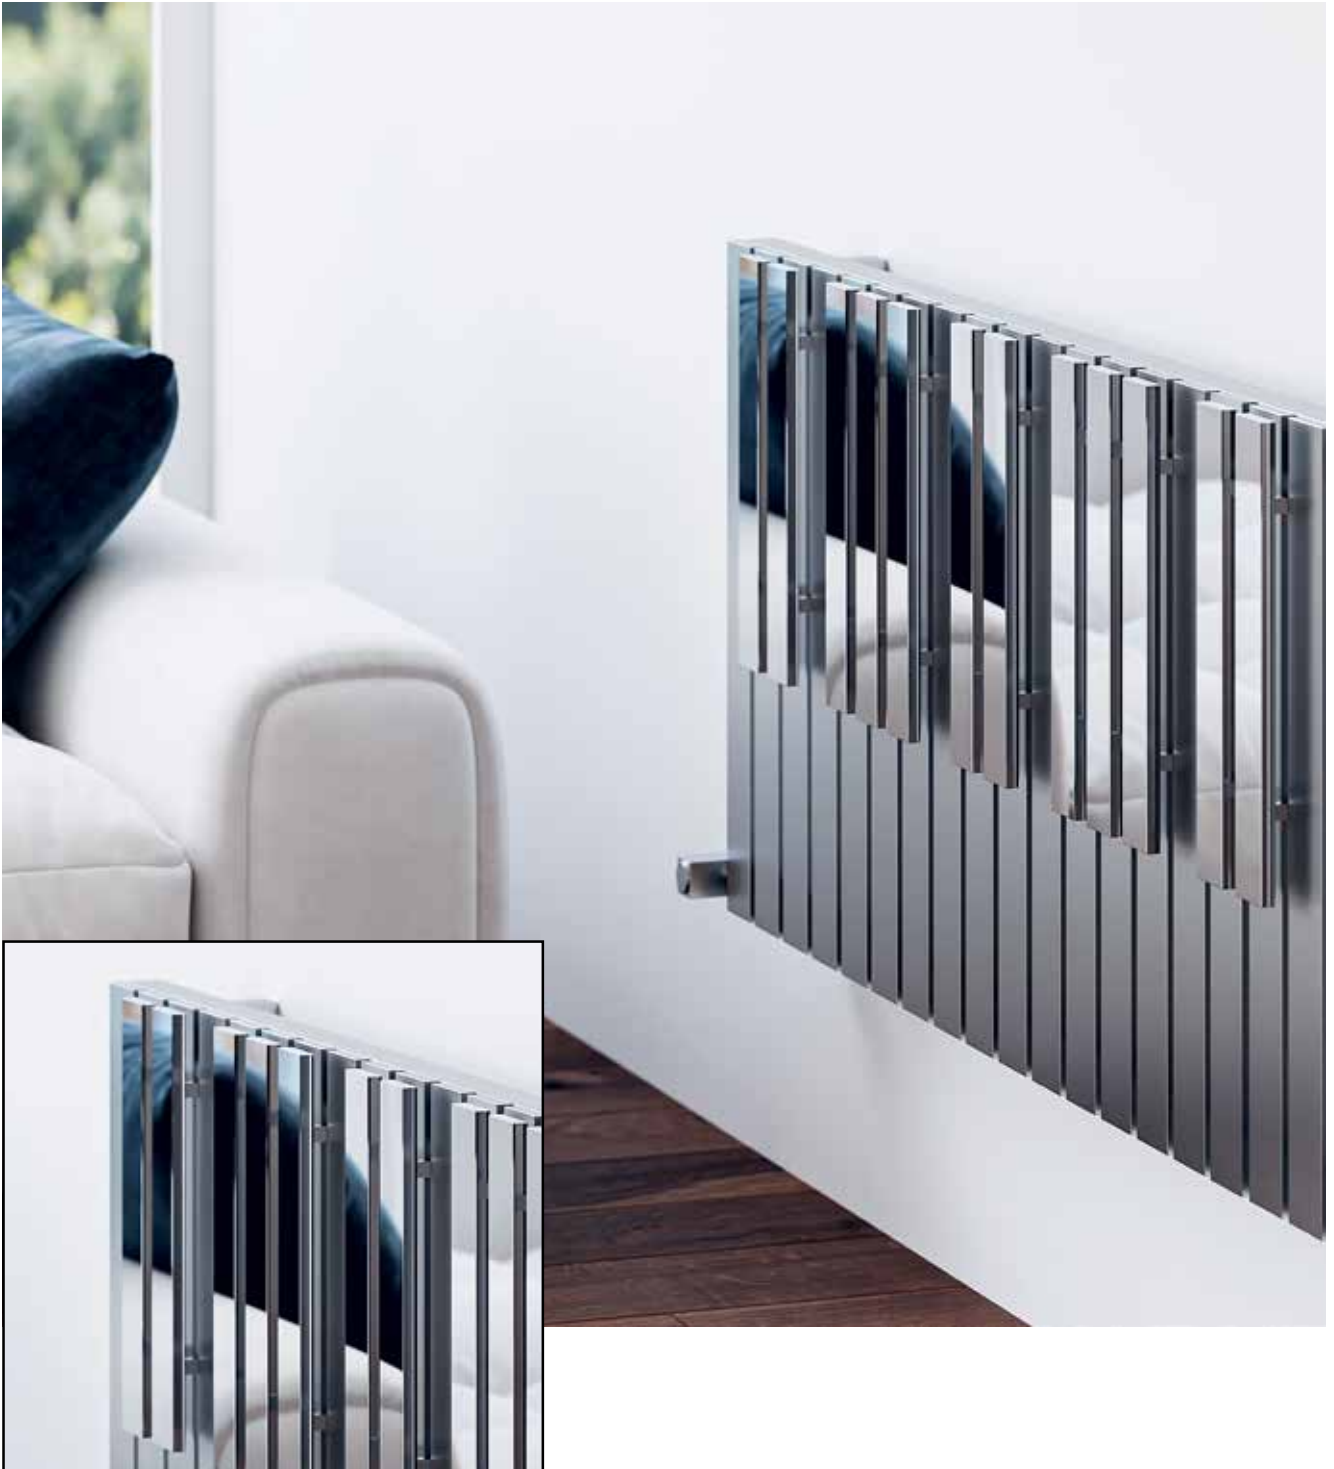

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
11PIA0500113019	500	1130	19	1220	460	60-75	110-125	22,1	7,0	D	559	1905	2931
11PIA0600113019	600	1130	19	1220	560	60-75	110-125	24,5	7,8	D	670	2286	3517



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar



Max. Working Temperature
95°C



Connections
1/2"



Pipe Centre
(W+90) mm






MAGICO





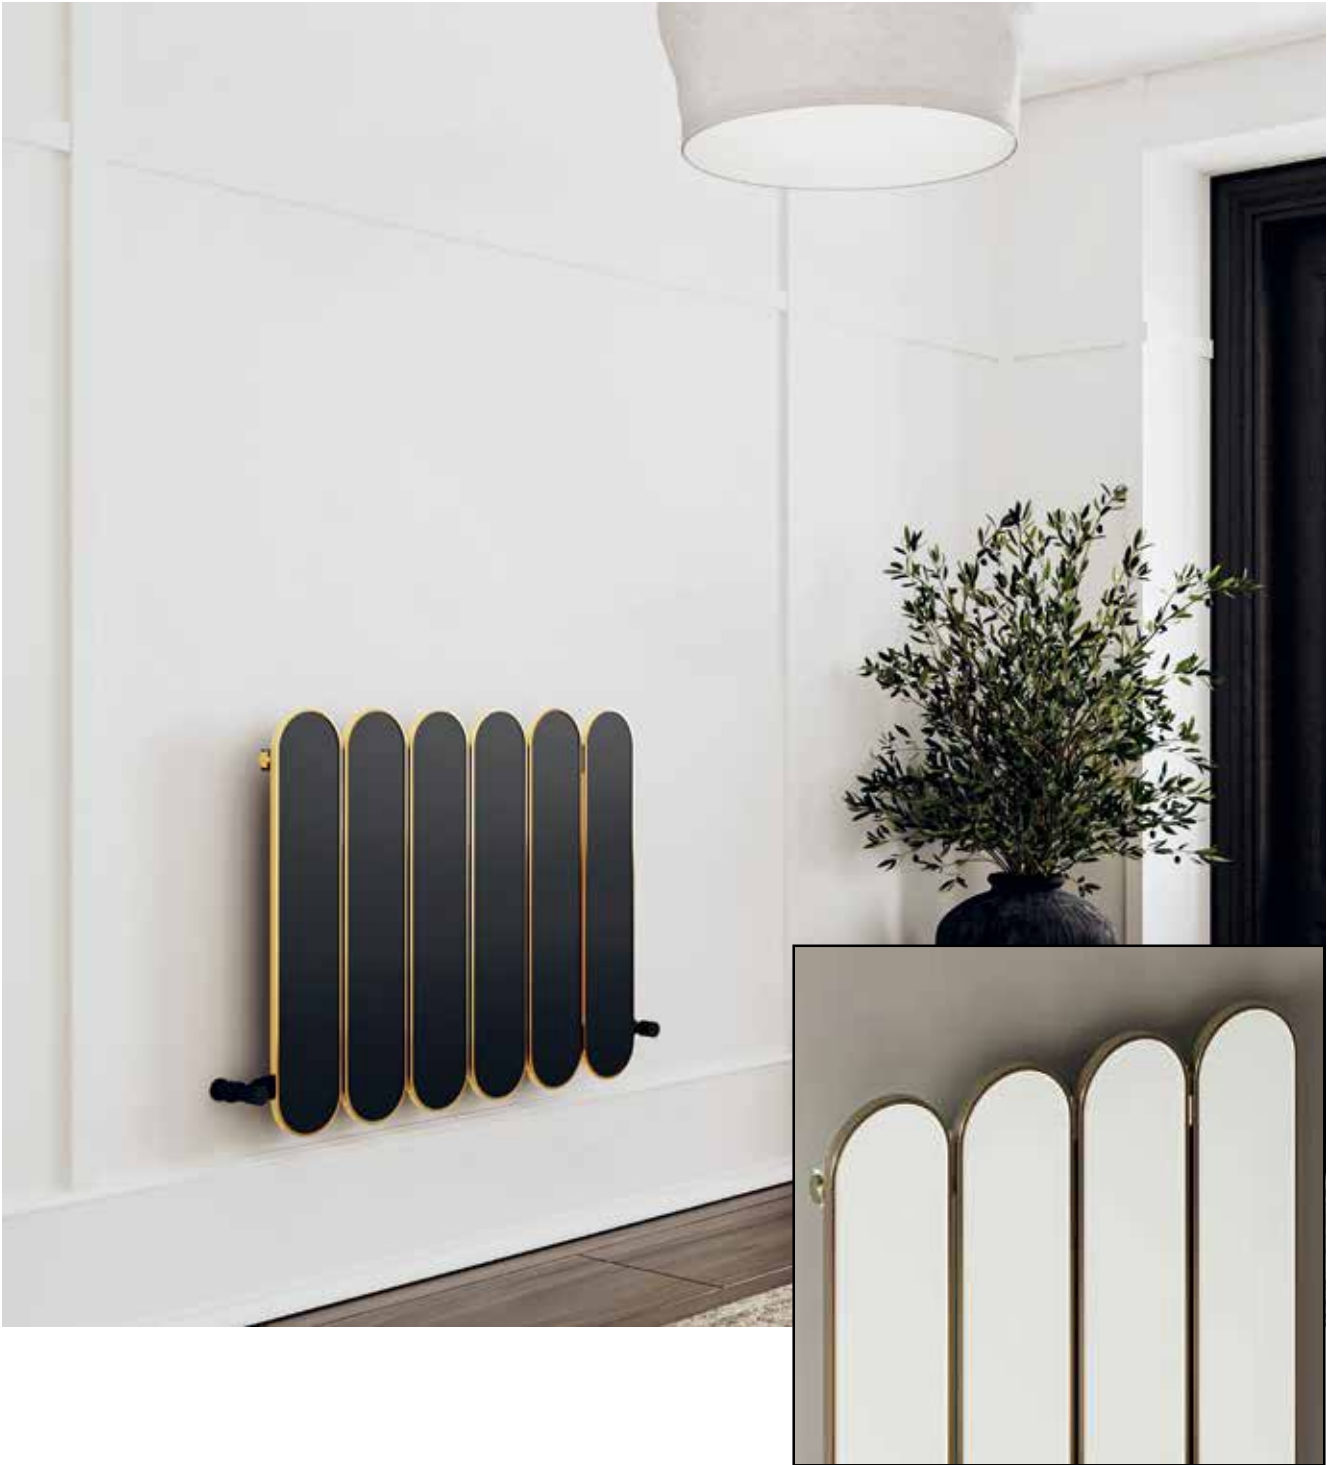



Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10MGC1800037003	1800	370	3	460	1655	55	82	10,6	1,7	C	543	1850	2847
10MGC1800049504	1800	495	4	585	1655	55	82	14,2	2,3	C	723	2467	3795
10MGC0600074506	600	745	6	835	455	55	82	7,8	1,2	C	394	1343	2065
10MGC0600099508	600	995	8	1085	455	55	82	10,3	1,7	C	525	1790	2754
10MGC0600124510	600	1245	10	1335	455	55	82	12,9	2,1	C	656	2238	3442

A full range of made to order size available.


 Material
Aluminium


 Max. Working Pressure
10 bar


 Connections
1/2"


 Sections Depth
39 mm

Radiator width for made to order size (mm)
((n × 125) - 5) mm

 Guarantee
5 years

 Max. Working Temperature
95°C

 Sections Width
120 mm

 Pipe Centre
(W+90) mm










Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10MGD1800037005	1800	370	3+2	460	1655	69-89	95-115	16,6	2,6	C	728	2482	3819
10MGD1800049507	1800	495	4+3	585	1655	69-89	95-115	22,9	3,6	C	1019	3475	5347
10MGD0600074511	600	745	6+5	835	455	69-89	95-115	11,9	1,9	C	645	2199	3384
10MGD0600099515	600	995	8+7	1085	455	69-89	95-115	16,0	2,6	C	860	2933	4512
10MGD0600124519	600	1245	10+9	1335	455	69-89	95-115	20,1	3,3	C	1075	3666	5640

A full range of made to order size available.


 Material
Aluminium


 Max. Working Pressure
10 bar


 Connections
1/2"


 Sections Depth
50 mm

Radiator width for made to order size (mm)
((n x 125) - 5) mm

 Guarantee
5 years

 Max. Working Temperature
95°C

 Sections Width
120 mm

 Pipe Centre
(W+90) mm







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10CUR1800024502	1800	245	2	50	40	90	8,2	1,2	C	517	1761	2710
10CUR1800037003	1800	370	3	50	55	105	12,4	1,7	C	774	2641	4063
10CUR1800049504	1800	495	4	50	55	105	15,8	2,3	C	945	3222	4958
10CUR1800062005	1800	620	5	50	55	105	19,8	2,9	C	1184	4036	6210
10CUR0600074506	600	745	6	50	55	105	7,9	1,2	C	473	1615	2484
10CUR0600099508	600	995	8	50	55	105	10,6	1,5	C	631	2153	3312
10CUR0600124510	600	1245	10	50	55	105	13,2	1,9	C	789	2691	4140

A full range of made to order size available.

Material
Aluminium

Max. Working Pressure
10 bar

Connections
1/2"

Sections Depth
70 mm

Radiator width for made to order size (mm)
((n × 125) - 5) mm

Guarantee
5 years

Max. Working Temperature
95°C

Sections Width
120 mm





Nature is within all of us,
Hidden inside us,
Waiting to be discovered.
Work with nature,
Move with nature.
Because...


Motion is everywhere...



Scan for commercial video





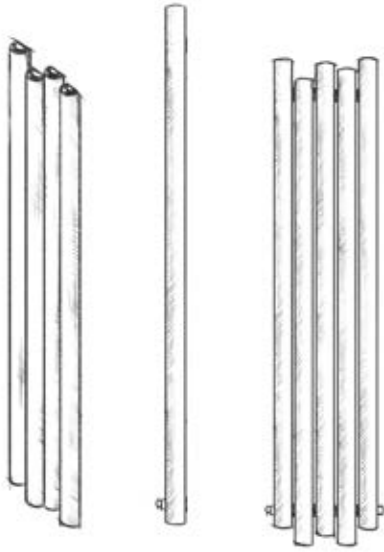




Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10MOT1800039005	1800	390	5	480	1600	30-50	90-110	14,6	2,9	C	911	3105	4777
10MOT1800055007	1800	550	7	640	1600	30-50	90-110	20,4	4,0	C	1275	4347	6688
10MOT0600063008	600	630	8	720	400	30-50	90-110	7,8	1,5	C	565	1928	2966
10MOT0600095012	600	950	12	1040	400	30-50	90-110	11,7	2,3	C	848	2892	4449

A full range of made to order size available.


 Material
Aluminium


 Max. Working Pressure
10 bar


 Connections
1/2"


 Sections Depth
75 mm

Radiator width for made to order size (mm)
((n × 80) - 10) mm

 Guarantee
5 years

 Max. Working Temperature
95°C

 Sections Width
70 mm


 Pipe Centre
(W+90) mm









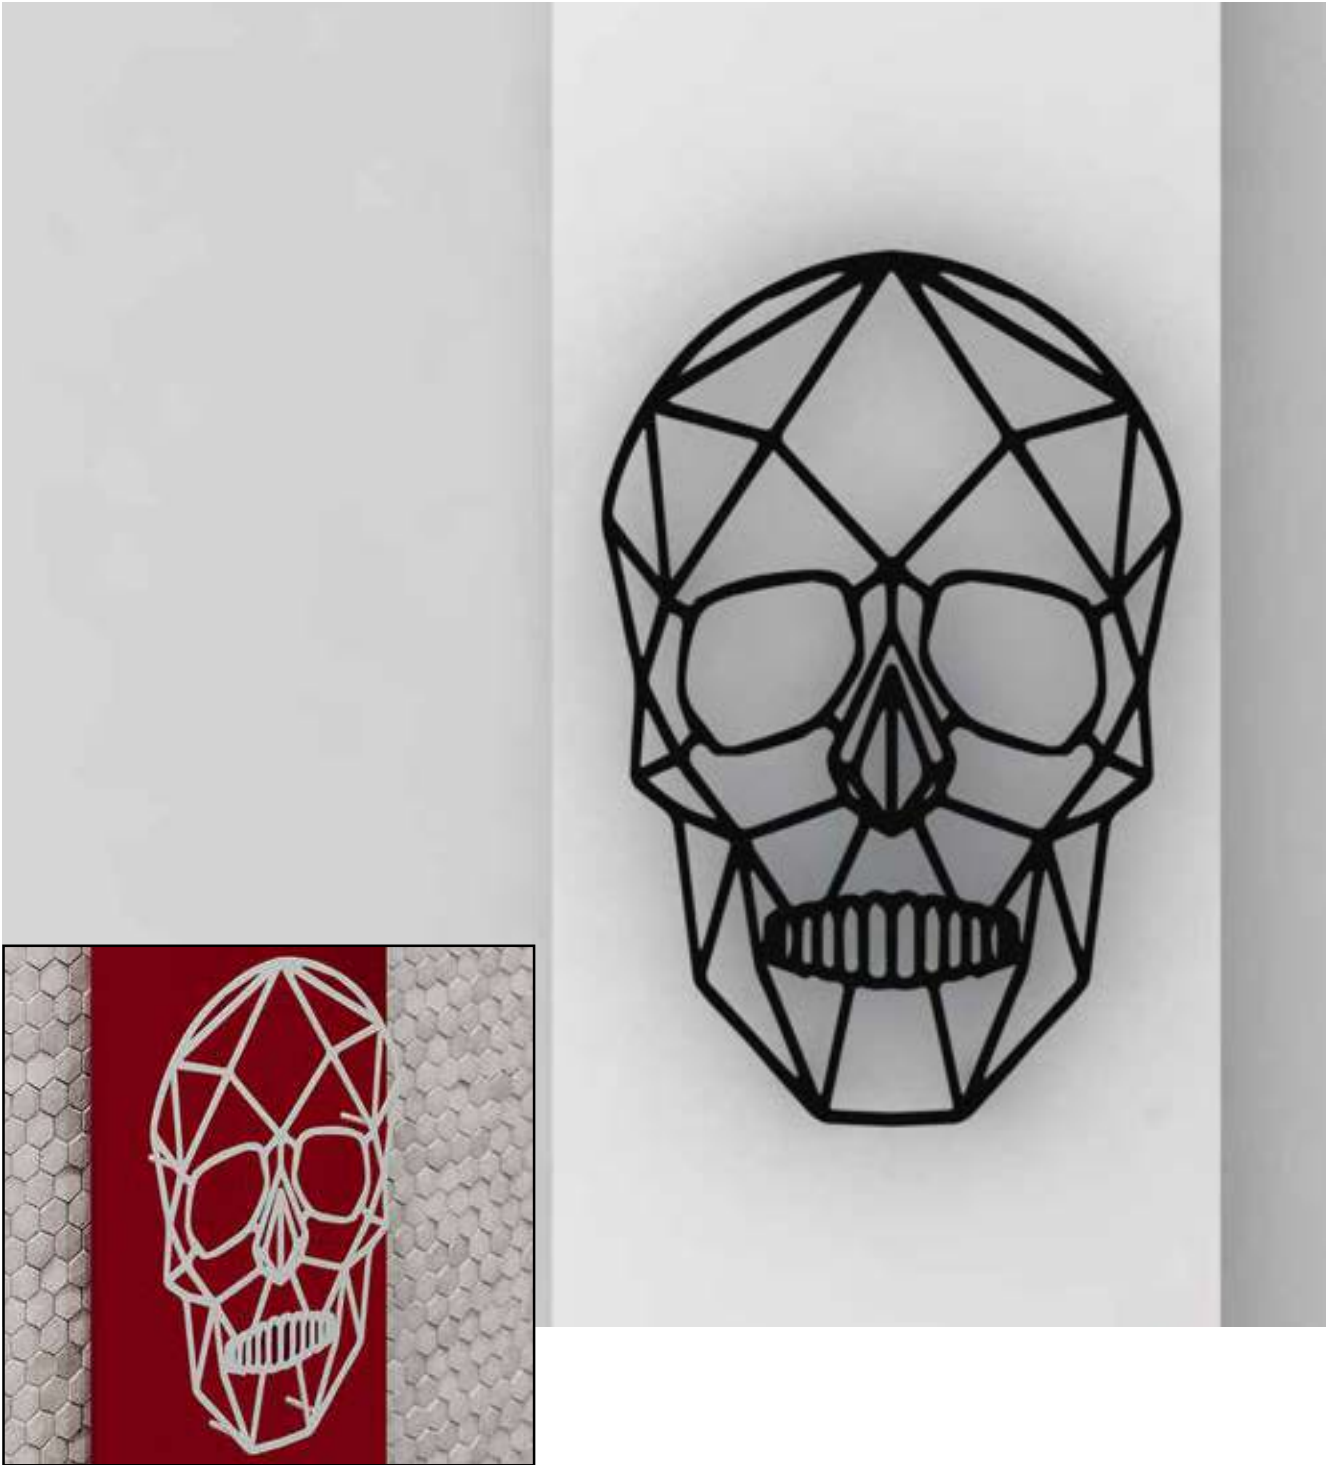

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15SKU1800047005	1800	470	5	560	1767	30-50	136-156	21,6	3,1	C	986	3364	5175

Al Material
Aluminium

Max. Working Pressure
10 bar

Connections
1/2"

Pipe Centre
(W+90) mm

Radiator width for made to order size (mm)
((n × 95) - 5) mm

Guarantee
5 years

Max. Working Temperature
95°C

Sections Depth
48 mm








Look to nature and discover it...
our World is a home and we are
a part of its family Alveole...
part of your home



Scan for commercial video



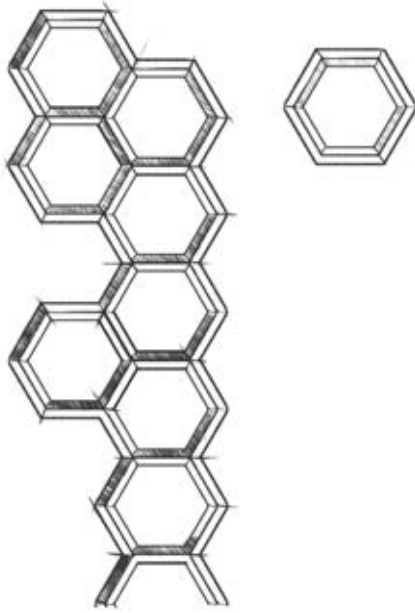

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16ALV0830055004	830	550	4	225	65-80	95-110	6,2	4,7	C	153	522	803
16ALV1195055006	1195	550	6	225	65-80	95-110	9,2	7,1	C	230	783	1204
16ALV1435055008	1435	550	8	225	65-80	95-110	11,6	9,0	C	306	1043	1605

Material
Stainless Steel

Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

Max. Working Pressure
10 bar

Max. Working Temperature
95°C

Connections
1/2"

Sections Depth
57 mm











Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16AID1200035001	1200	350	1	50	65-80	165-180	7,2	2,4	C	243	829	1275
16AID1500035001	1500	350	1	50	65-80	165-180	8,5	2,9	C	298	1016	1563
16AID1800035001	1800	350	1	50	65-80	165-180	10,3	3,7	C	352	1200	1847

 Material
Stainless Steel

 Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces


 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"






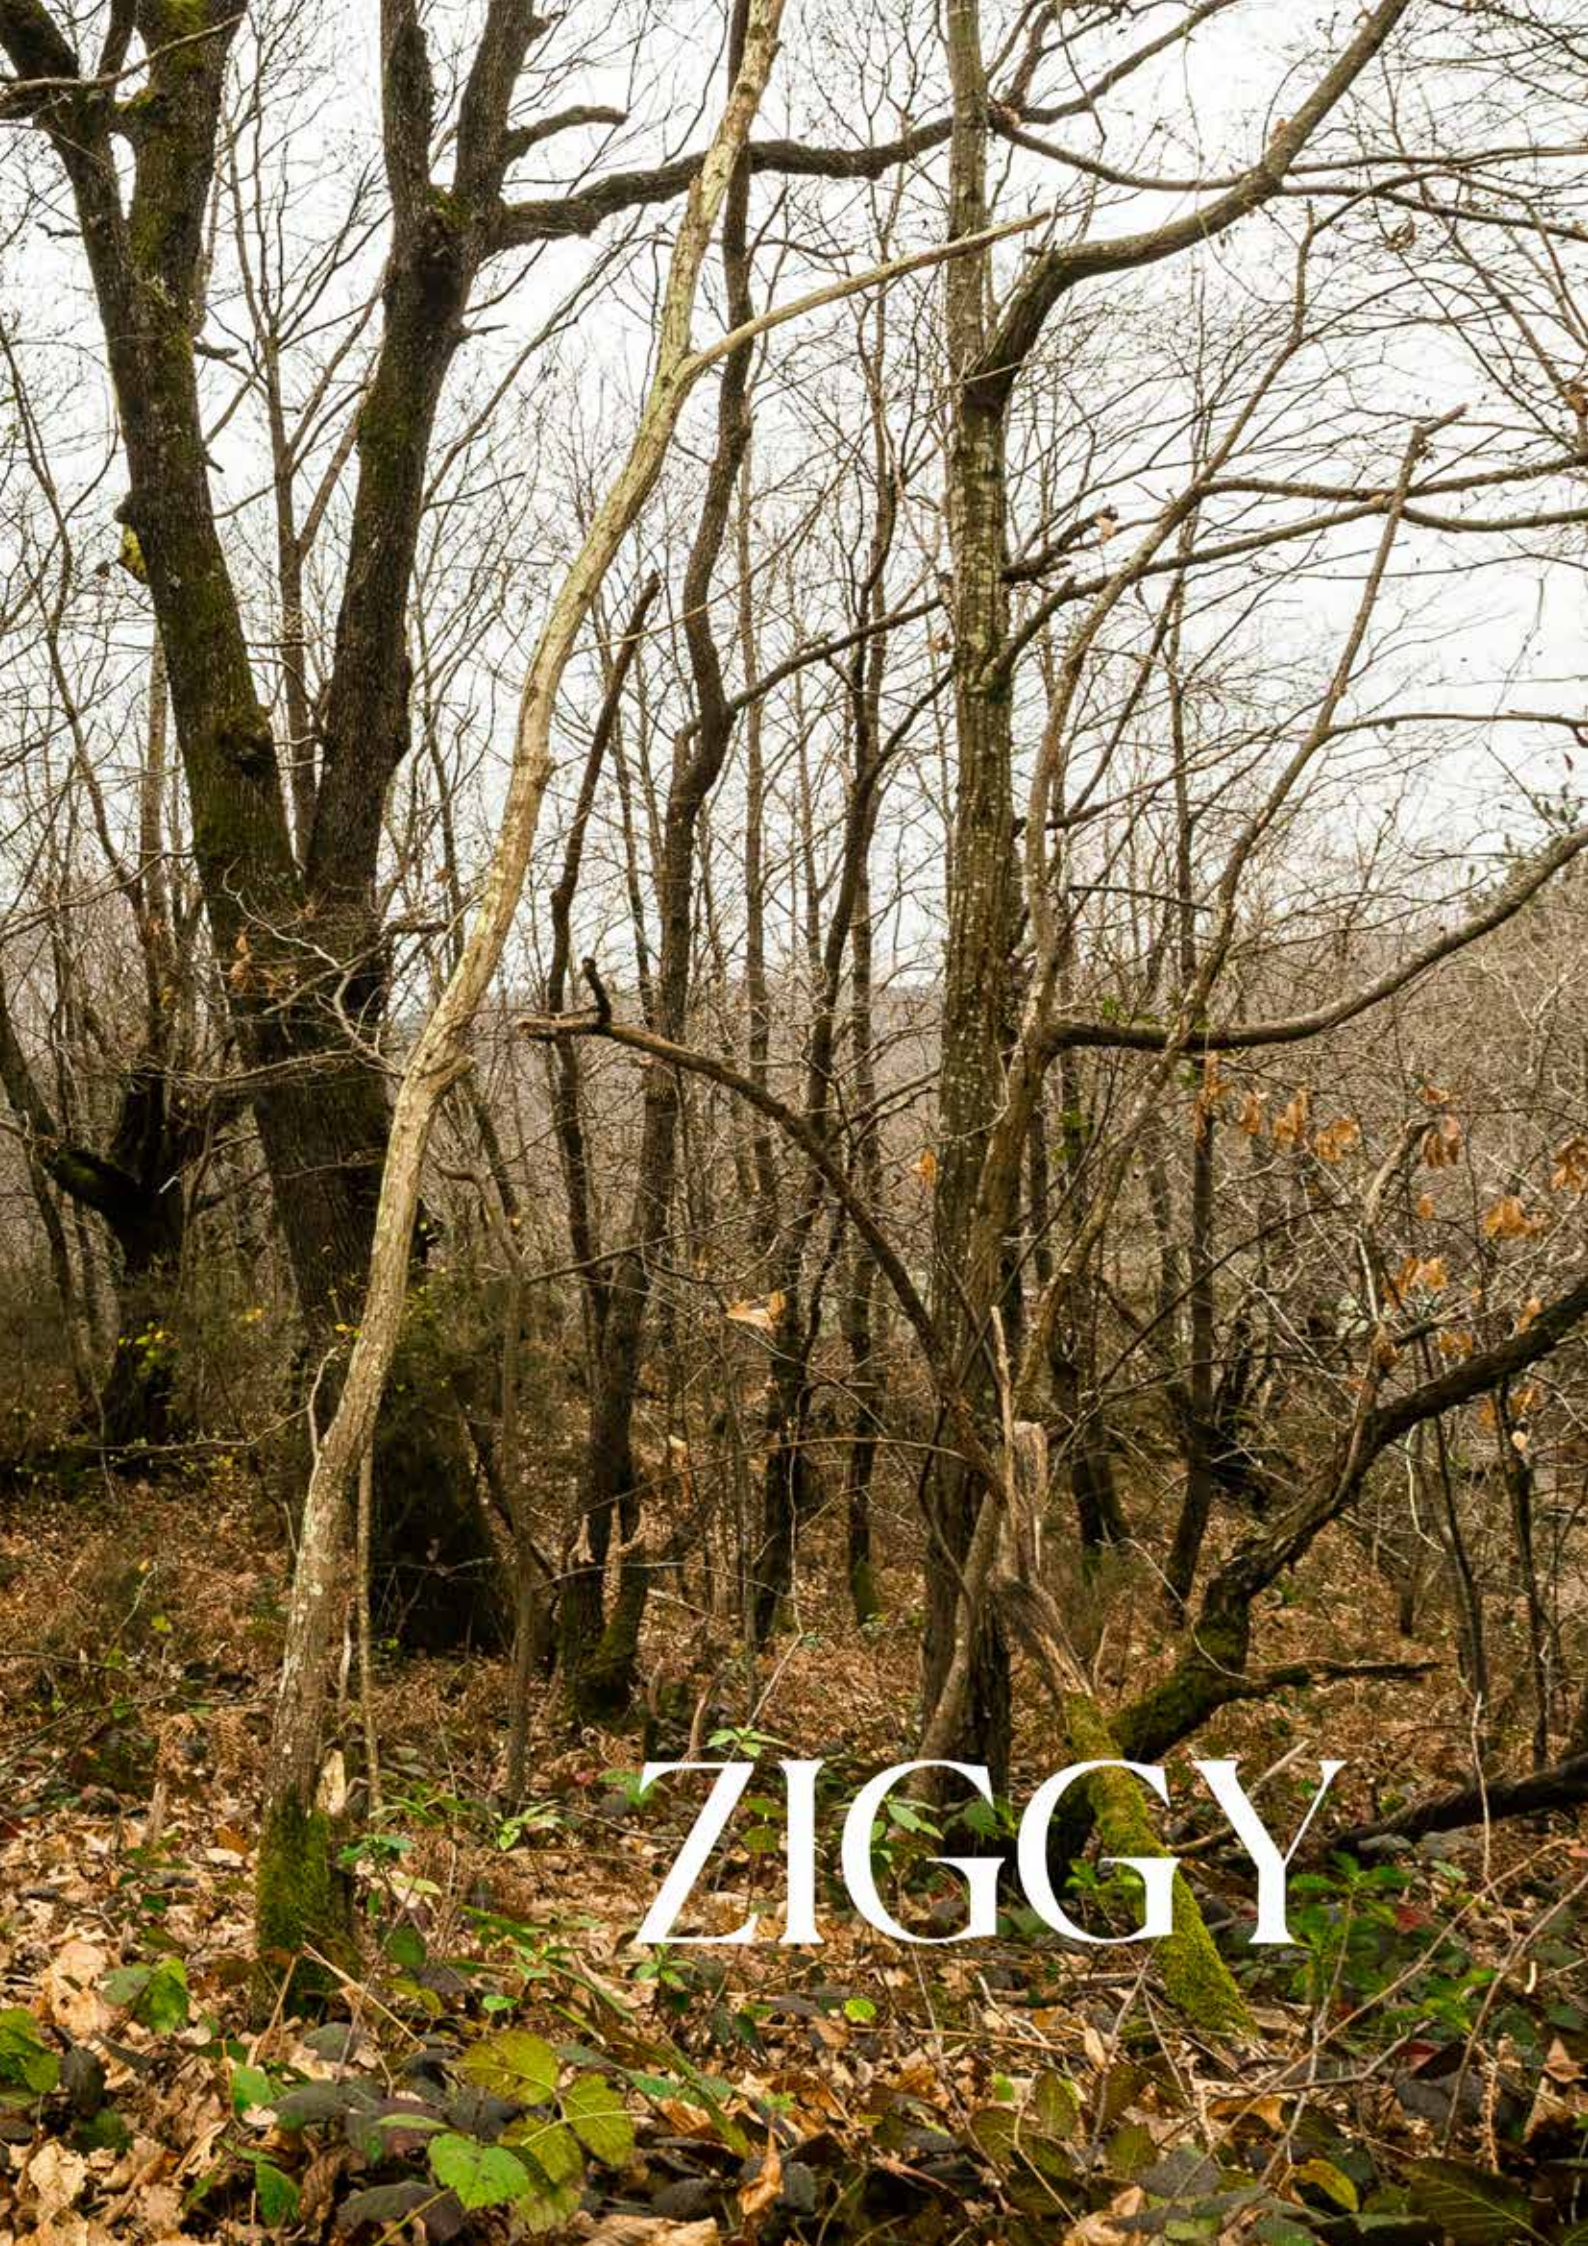

ZIGGY



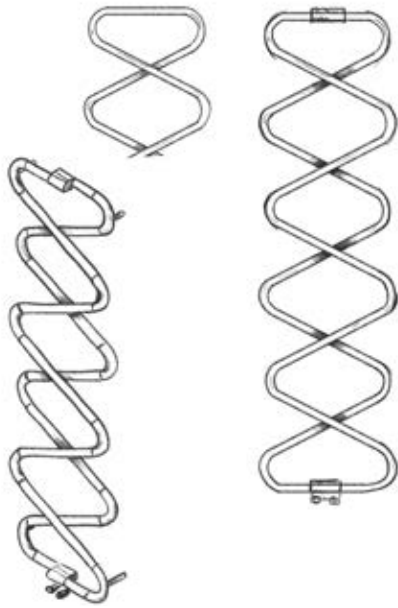

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16ZGY0510050002	510	500	2	50	65-85	101-116	4,1	1,8	C	116	394	606
16ZGY1170050004	1170	500	4	50	65-85	101-116	8,0	3,5	C	239	816	1256
16ZGY1830050006	1830	500	6	50	65-85	101-116	11,9	5,2	C	364	1241	1910

Material
Stainless Steel


Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

Max. Working Pressure
10 bar

Max. Working Temperature
95°C

Connections
1/2"



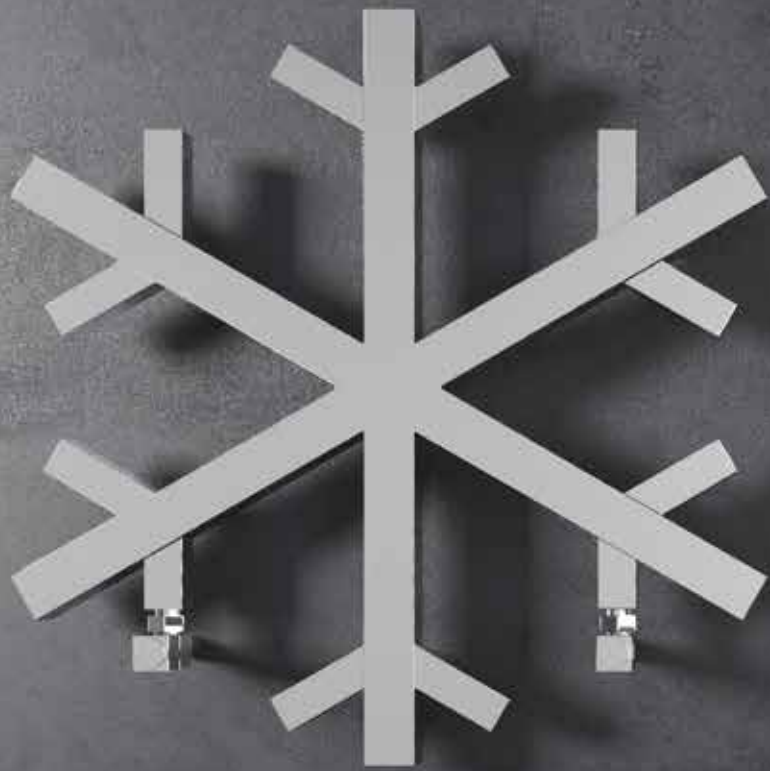



Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16SNW0600060006	600	600	6	360	65-80	85-100	5,5	3,6	C	217	739	1137

A full range of made to order size available.



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar




Max. Working Temperature
95°C



Connections
1/2"





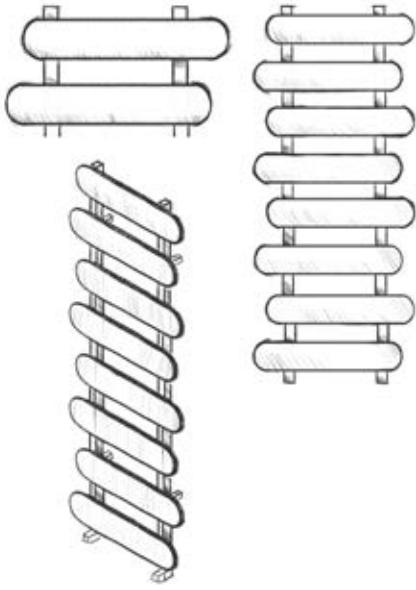



Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15MGB0705050004	705	500	4	300	67-82	98-113	6,5	0,7	D	323	1100	1693
15MGB1095050006	1095	500	6	300	67-82	98-113	9,8	1,1	D	483	1646	2532
15MGB1485050008	1485	500	8	300	67-82	98-113	13,0	1,5	D	643	2191	3371


A full range of made to order size available.


 Material
Aluminium


 Max. Working Pressure
10 bar

 Connections
1/2"



 Guarantee
5 years

 Max. Working Temperature
95°C

 Pipe Centre
(W-200) mm







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15CUB0600049504	600	495	4	50	55	147	5,3	0,8	C	319	1088	1671
15CUB1000024502	1000	245	2	50	40	132	4,6	0,5	C	287	979	1505
15CUB1500024502	1500	245	2	50	40	132	6,9	1,0	C	430	1468	2258
15CUB1800024502	1800	245	2	50	40	132	8,2	1,2	C	517	1761	2710
15CUB2000024502	2000	245	2	50	40	132	9,2	1,3	C	574	1957	3011

A full range of made to order size available.



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
5 years



Max. Working Temperature
95°C




You are cold
Don't be afraid...
Be calm...
Just feel it.
Connect the dream to reality..
Jacob's Ladder



Scan for commercial video





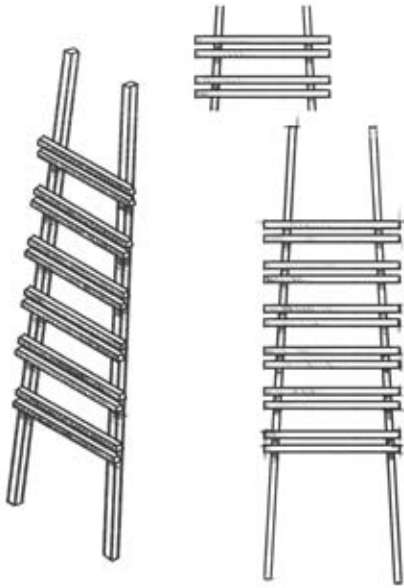

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15JAF2000053512	2000	535	12	50-465	157	236	12,3	1,8	C	569	1940	2985

Al Material
Aluminium

Max. Working Pressure
10 bar

Connections
1/2"

Guarantee
5 years

Max. Working Temperature
95°C










Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15JAW2000053512	2000	535	12	515	67-87	111-131	12,3	1,8	D	569	1940	2985


 Material
Aluminium

 Max. Working Pressure
10 bar

 Connections
1/2"



 Guarantee
5 years

 Max. Working Temperature
95°C




First light in the morning,
Makes you feel happy.
Comforting you,
Your way of life...
Your radiator, your home.
Vivek...



Scan for commercial video





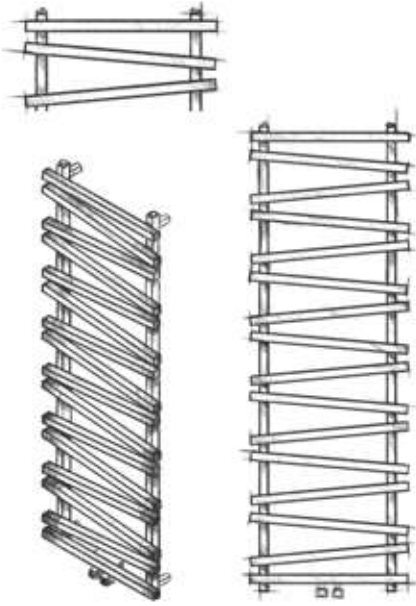

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15VVK0720050008	720	500	8	50-400	67-87	111-131	5,6	1,2	D	317	1081	1663
15VVK1290050014	1290	500	14	50-400	67-87	111-131	9,7	2,1	D	555	1892	2910
15VVK1480050016	1480	500	16	50-400	67-87	111-131	11,0	2,4	D	634	2162	3326

A full range of made to order size available.

Material
Aluminium

Max. Working Pressure
10 bar

Connections
1/2"



Guarantee
5 years

Max. Working Temperature
95°C








PREMIUM
COLLECTION



88

MISTRAL	68	PIPETTE	102-103
MISTRAL F	69	SOPHIA	104-105
KEOPS	70	SOPHIA XL	106
ODESSA	71	DORA	107
QUADRO	72	HALO	108
CIRCLES	73	OZ	109
SOPHIA MIRROR	74	KNIGHT	110
STEP MIRROR	75	DOMINO	111
ENTREE	76	RUMA	112
BURANO MIRROR	77	CASTOR	113
TALLIS MIRROR	78-79	ADORE	114
KARO	80	ALIAS	115
TUBO	81	ARLEN	116
ELVINO	82-83	IBIZA	117
ELVINO FLOOR DOUBLE	84	PAPILLION BATH	118
ELVINO FLOOR	85	ELVINO BATH MIRROR	119
NIXIE	86-87	ELVINO BATH	120
GAIA	88-89	PLAY BATH	121
VESTA	90-91	UNICO	122
OTTO	92-93	TERRA	123
MOSCOW	94-95	TERRA L	124
MOSCOW C	96-97	MOON	125
MOSCOW D	98-99	MOON L	126
TUBULOUS	100-101	NIXIE BATH	127
		KENSINGTON	128-129
		MAGNUS W	130
		MAGNUS F	131

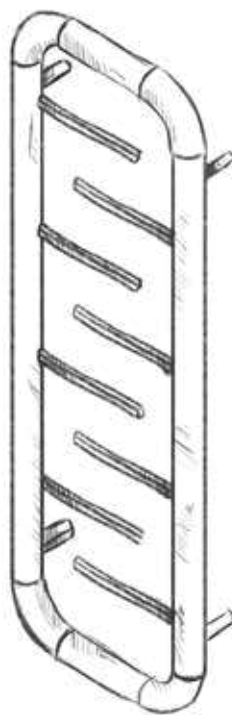






Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
11MIS1800032005	1800	320	5	410	1720	60-75	135-150	33,1	7,7	C	568	1936	2978
11MIS1800038506	1800	385	6	475	1720	60-75	135-150	39,7	9,3	C	682	2325	3577
11MIS1800045007	1800	450	7	540	1720	60-75	135-150	46,3	10,9	C	794	2706	4164


A full range of made to order size available.


 Material
Stainless Steel


 Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"

 Sections Width
60 mm

 Pipe Centre
(W+90) mm

Radiator width for made to order size (mm)
((n × 65) - 5) mm








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
11MIF0760051508	760	515	8	605	520	60-75	135-150	20,3	4,1	C	413	1409	2168
11MIF0760077512	760	775	12	865	520	60-75	135-150	30,4	6,2	C	620	2114	3252
11MIF0760103516	760	1035	16	1125	520	60-75	135-150	40,5	8,2	C	827	2818	4336


A full range of made to order size available.


 **Material**
Stainless Steel


 **Guarantee Terms**
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 **Max. Working Pressure**
10 bar

 **Max. Working Temperature**
95°C


 **Connections**
1/2"

 **Sections Width**
60 mm

 **Pipe Centre**
(W+90) mm

Radiator width for made to order size (mm)
((n × 65) - 5) mm



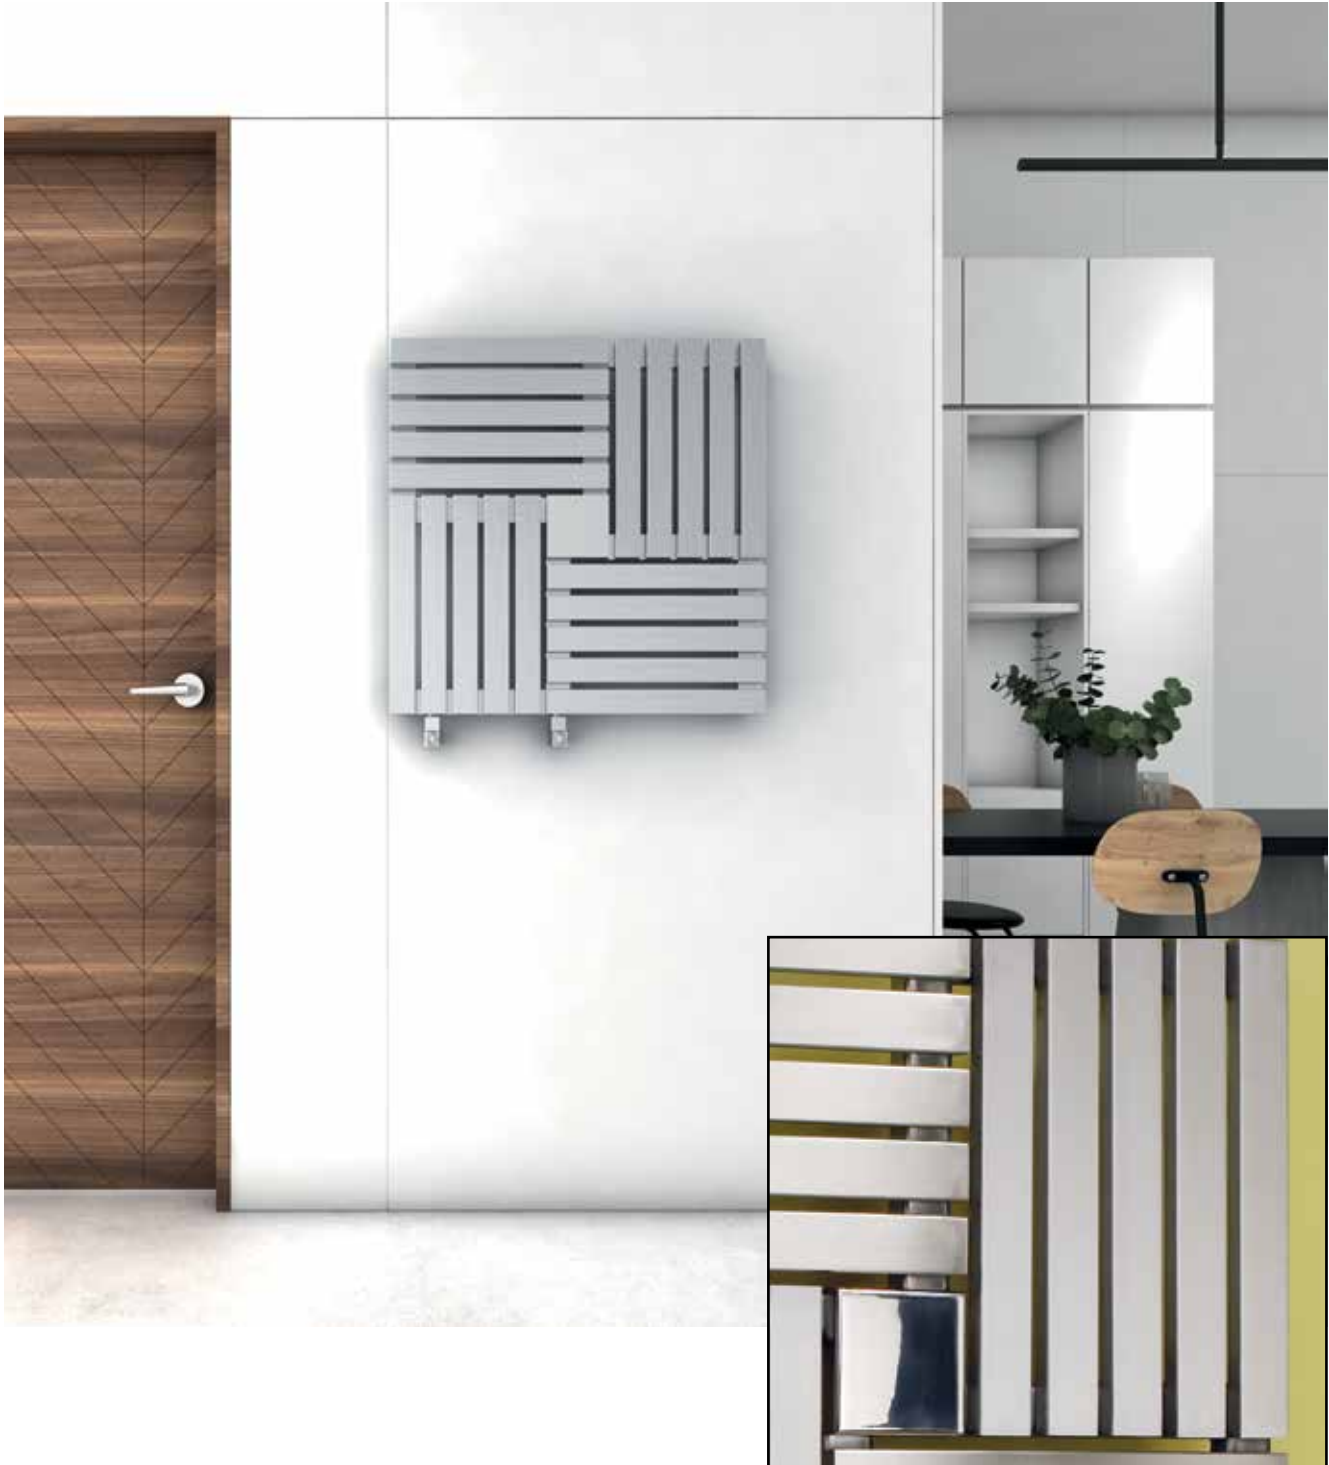




Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
11KEO0600060020	600	600	20	200	-	30-45	85-100	8,5	4,2	C	381	1299	1999
11KEO0700070024	700	700	24	250	-	30-45	85-100	9,9	4,9	C	444	1516	2332
11KEO0800080028	800	800	28	300	-	30-45	85-100	11,3	5,6	C	508	1732	2665


A full range of made to order size available.


 Material
Stainless Steel

 Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"










 Sections Width
40 mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10ODE1800031004	1800	310	4	400	1774	55	116	9,8	1,1	C	751	2561	3944
10ODE1800039005	1800	390	5	480	1774	55	116	11,8	1,4	C	939	3202	4931
10ODE1800047006	1800	470	6	560	1774	55	116	13,8	1,7	C	1126	3840	5913
10ODE1800055007	1800	550	7	640	1774	55	116	15,9	2,0	C	1314	4481	6900
10ODE0600079010	600	790	10	880	540	30-50	90-110	9,1	1,7	C	817	2785	4284
10ODE0600095012	600	950	12	1040	540	30-50	90-110	10,9	2,0	C	980	3341	5141


A full range of made to order size available.


-  **Material Aluminium**
-  **Max. Working Pressure 10 bar**
-  **Connections 1/2"**
-  **Sections Depth 75 mm**
- Radiator width for made to order size (mm) ((n × 80) - 10) mm**
-  **Guarantee 5 years**
-  **Max. Working Temperature 95°C**
-  **Sections Width 70 mm**
-  **Pipe Centre (W+90) mm**
- 




Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10QUA1610028003	1610	280	3	50-370	1577	30-50	75-95	12,5	1,7	C	534	1821	2801
10QUA1800047005	1800	470	5	50-560	1767	30-50	75-95	18,6	3,1	C	935	3188	4904


 Material
Aluminium


 Max. Working Pressure
10 bar

 Connections
1/2"



 Guarantee
5 years

 Max. Working Temperature
95°C

 Pipe Centre
50mm / (W+90) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10CRL1800047005	1800	470	5	50-560	1767	30-50	75-95	17,9	3,1	C	996	3396	5225

Material **Aluminium**

Max. Working Pressure **10 bar**

Connections **1/2"**



Guarantee **5 years**

Max. Working Temperature **95°C**

Pipe Centre **50mm / (W+90) mm**






Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10SOM1800041510	1800	415	10	505	1740	55	98	15,3	2,7	C	1261	4301	6617

A full range of made to order size available.

Material Aluminium	Max. Working Pressure 10 bar	Connections 1/2"	Sections Depth 62 mm	Radiator width for made to order size (mm) ((n x 42) - 5) mm	
Guarantee 5 years	Max. Working Temperature 95°C	Sections Width 27 mm	Pipe Centre (W+90) mm		

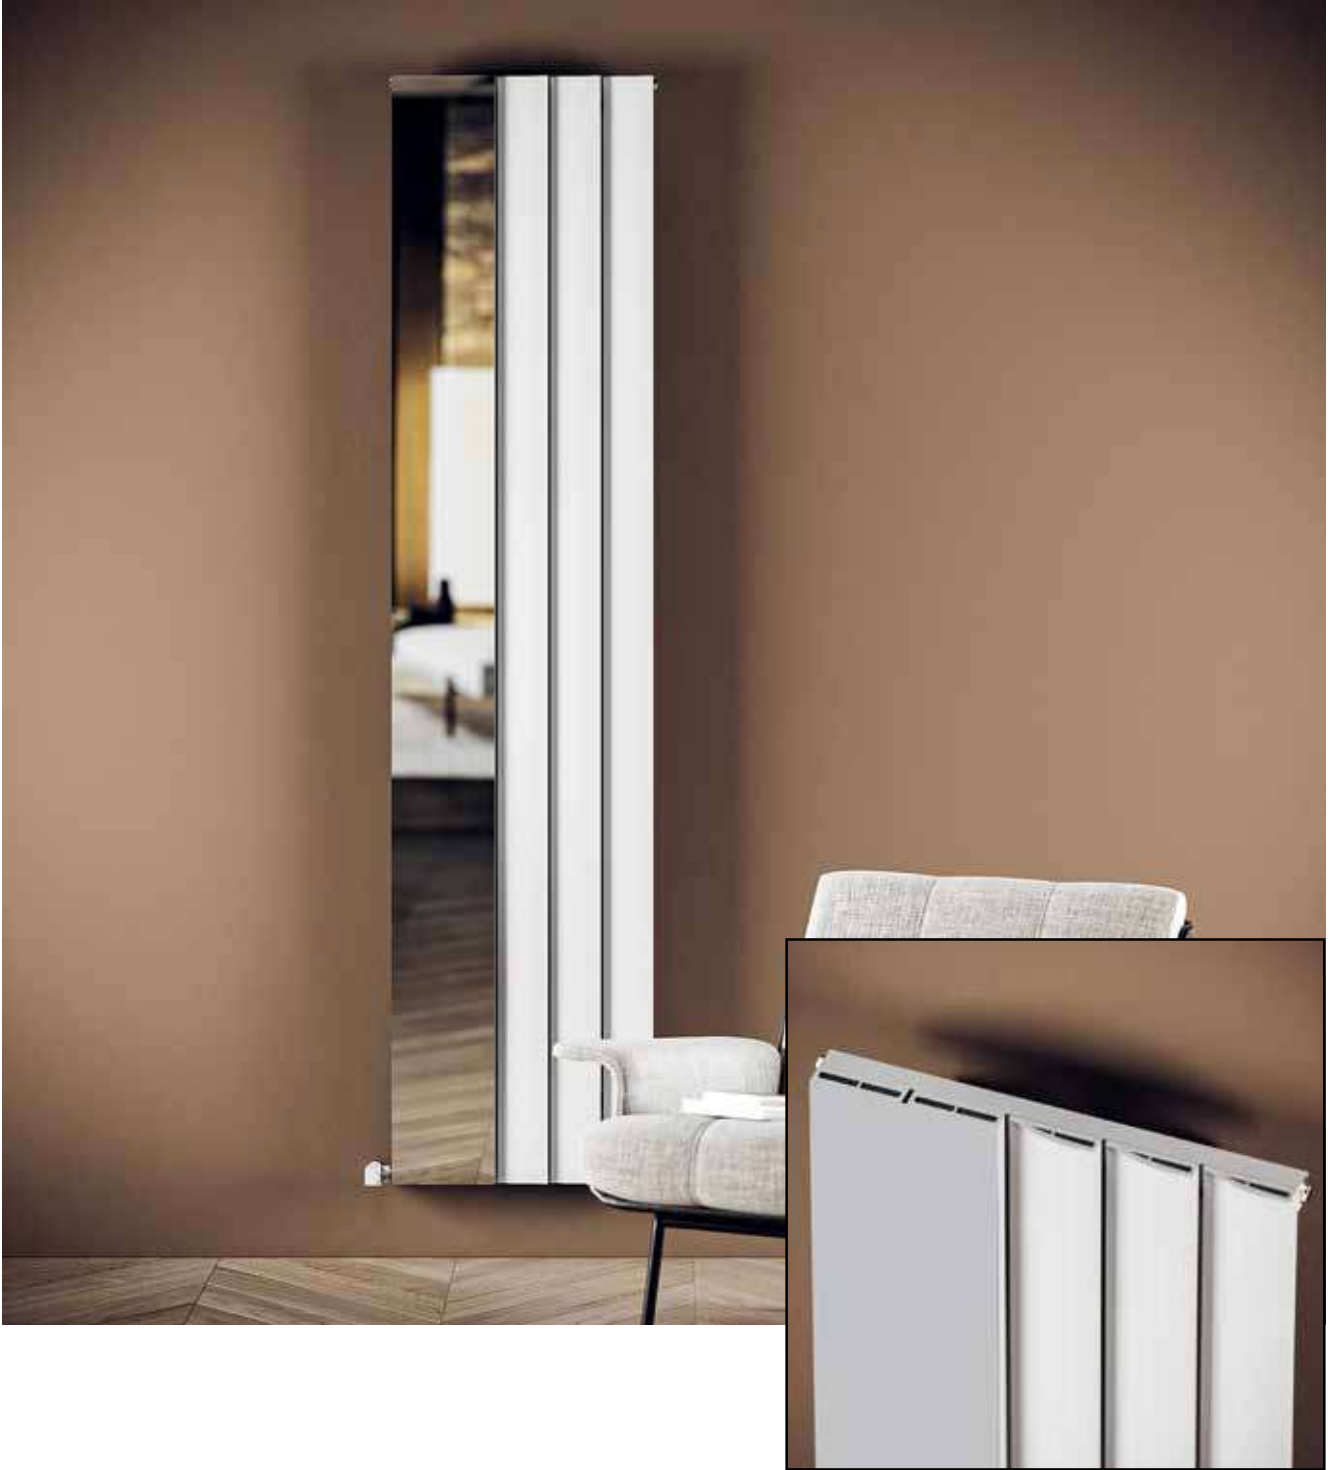

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10STM1800037504	1800	375	4	465	1767	30-50	75-95	11,4	2,5	C	881	3004	4621
10STM1800047005	1800	470	5	560	1767	30-50	75-95	12,5	3,1	C	1101	3755	5777

A full range of made to order size available.

Material **Aluminium**

Max. Working Pressure **10 bar**

Connections **1/2"**

Radiator width for made to order size (mm)
((n × 95) - 5) mm



Guarantee **5 years**

Max. Working Temperature **95°C**

Pipe Centre **50mm / (W+90) mm**








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10ENT1800047005	1800	470	5	50-560	1775	30-50	83-103	12,4	2,5	C	1081	3686	5671

A full range of made to order size available.

 Material
Aluminium


 Max. Working Pressure
10 bar


 Connections
1/2"


 Pipe Centre
50 mm / (W+90) mm

Radiator width for made to order size (mm)
((n × 95) - 5) mm



 Guarantee
5 years

 Max. Working Temperature
95°C

 Sections Width
90 mm






Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10BRM1800037504	1800	375	4	50	1775	30-50	83-103	9,5	2	C	925	3154	4852

A full range of made to order size available.





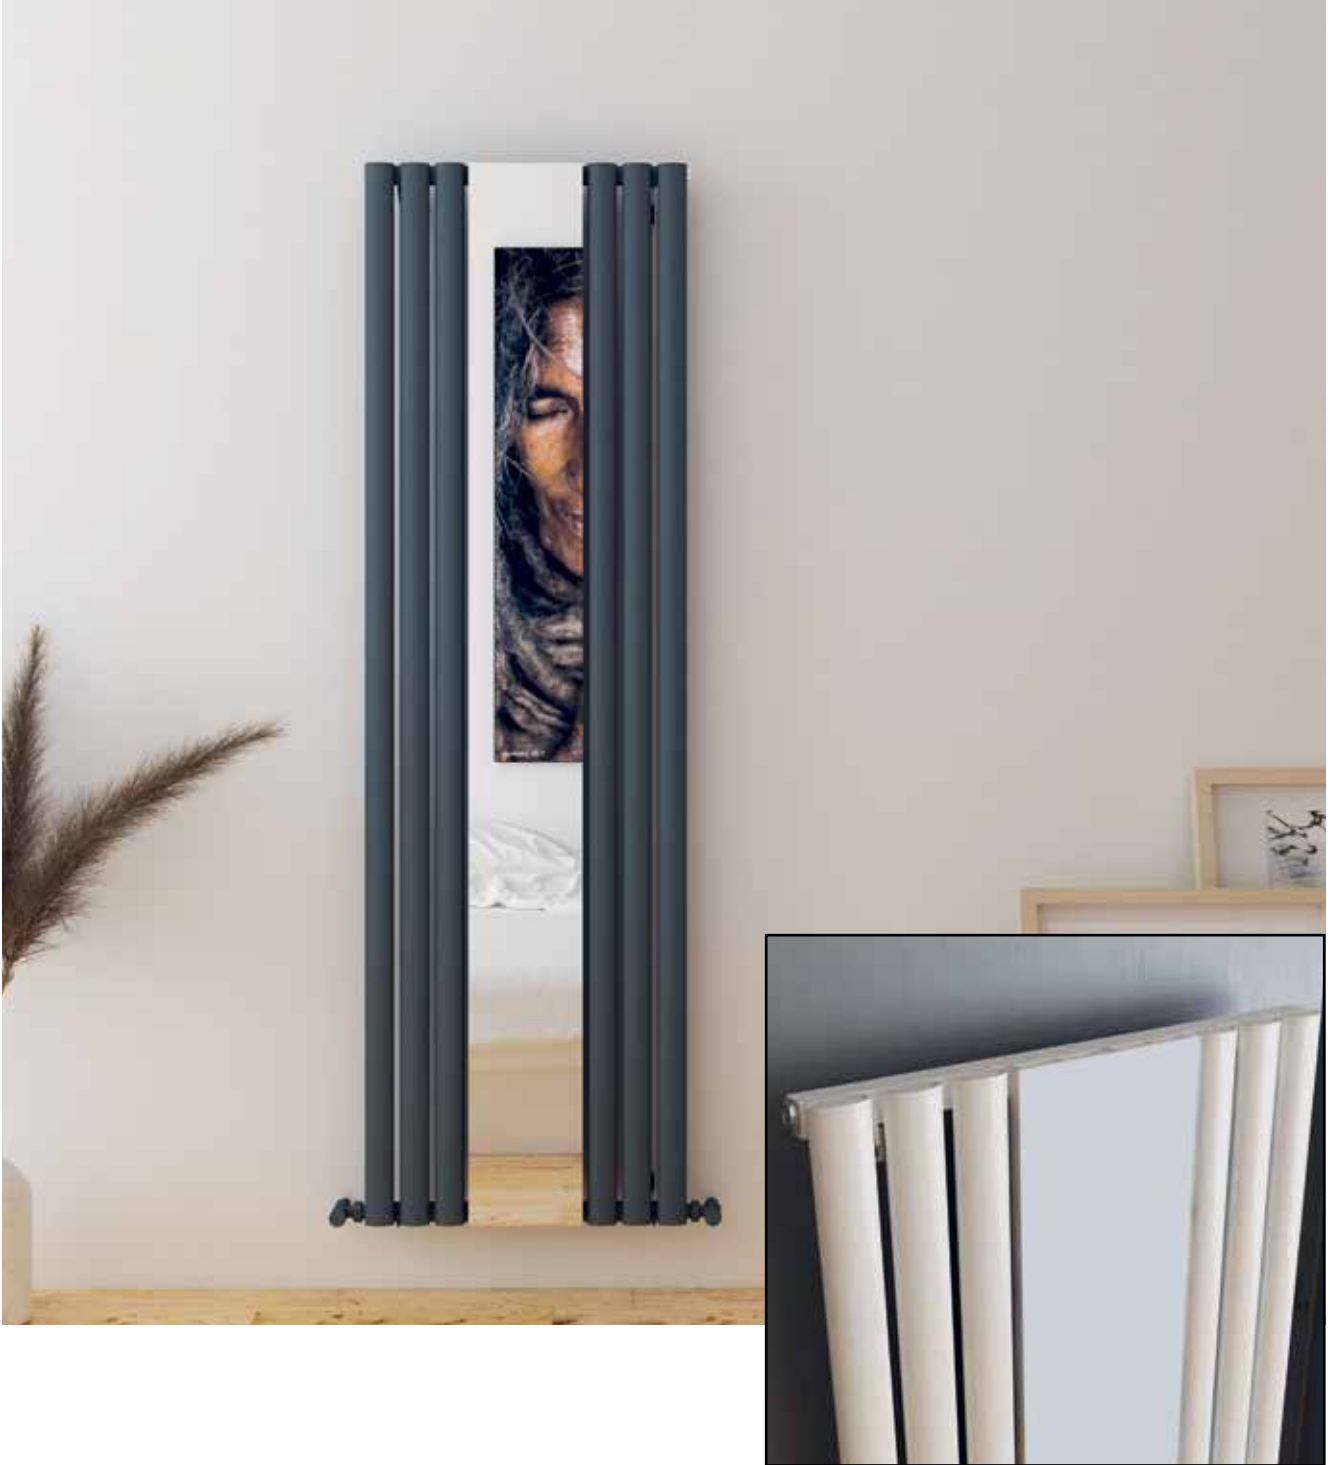





Material Aluminium	Max. Working Pressure 10 bar	Connections 1/2"	Pipe Centre 50 mm	Radiator width for made to order size (mm) ((n × 95) - 5) mm	
Guarantee 5 years	Max. Working Temperature 95°C	Sections Width 90 mm			





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10TAM1800055008	1800	550	8	640	1768	55	100	18	4,8	C	1181	4027	6196

A full range of made to order size available.

-  **Material Aluminium**
-  **Max. Working Pressure 10 bar**
-  **Connections 1/2"**
-  **Sections Depth 51 mm**
- 
-  **Guarantee 5 years**
-  **Max. Working Temperature 95°C**
-  **Sections Width 50 mm**
-  **Pipe Centre (W+90) mm**
- 



Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10KAR1800029006	1800	290	6	380	1737	95	165	29,0	2,0	C	1379	4701	7230
10KAR1800034007	1800	340	7	430	1737	95	165	33,8	2,3	C	1609	5484	8434
10KAR1800039008	1800	390	8	480	1737	95	165	38,7	2,7	C	1838	6267	9639
10KAR0600059012	600	590	12	680	537	95	165	19,3	1,3	C	919	3133	4818
10KAR0600079016	600	790	16	880	537	95	165	30,1	2,1	C	1225	4176	6423

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Pipe Centre
(W+90) mm



Guarantee
5 years



Max. Working Temperature
95°C



Sections Width
40 mm









Radiator width for made
to order size (mm)
(n x 50) - 10 mm







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10TBO1800029006	1800	290	6	380	1727	95	165	27,6	2,0	C	1313	4477	6886
10TBO1800034007	1800	340	7	430	1727	95	165	32,1	2,3	C	1532	5223	8032
10TBO1800039008	1800	390	8	480	1727	95	165	36,7	2,7	C	1751	5969	9180
10TBO0600059012	600	590	12	680	527	95	165	18,4	1,3	C	875	2984	4589
10TBO0600079016	600	790	16	880	527	95	165	28,6	2,1	C	1167	3977	6117

A full range of made to order size available.



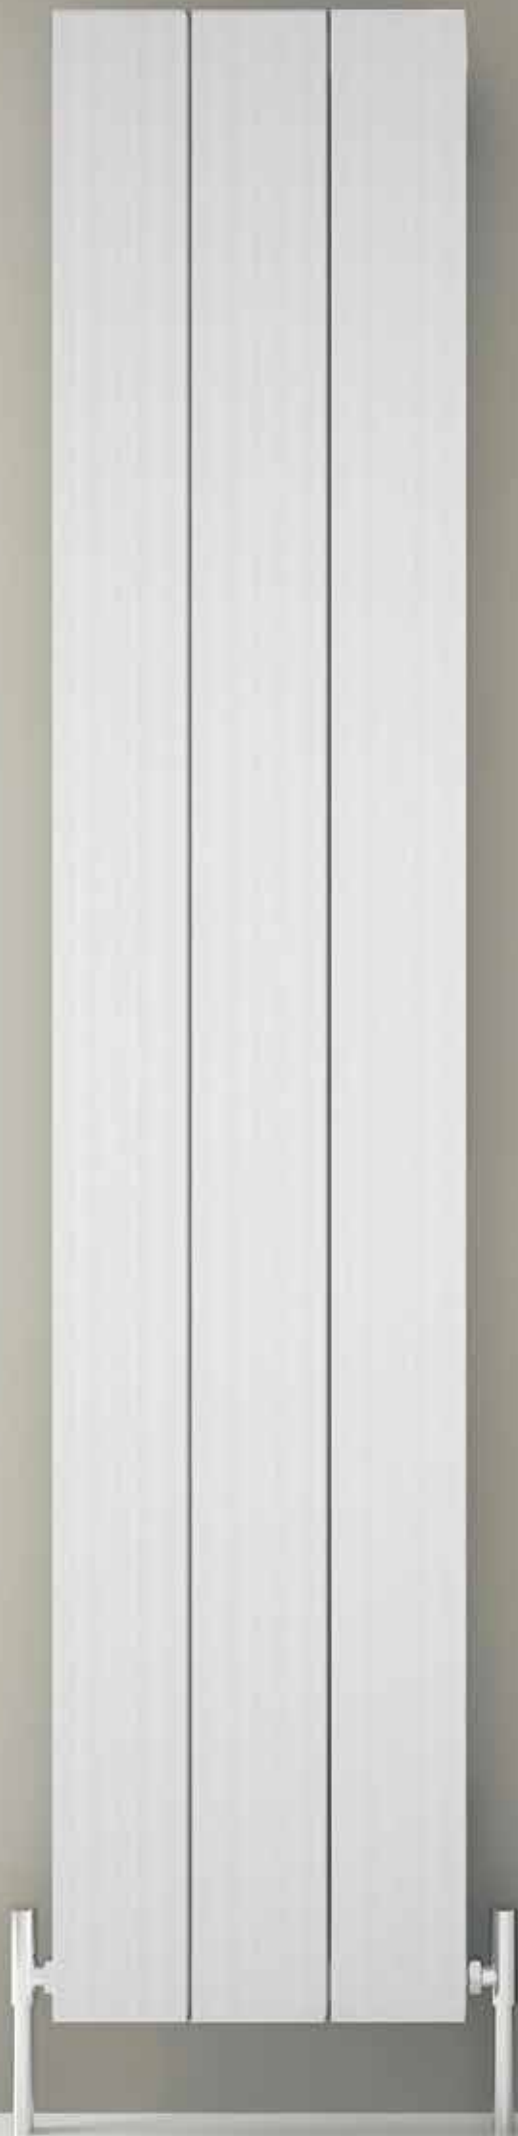

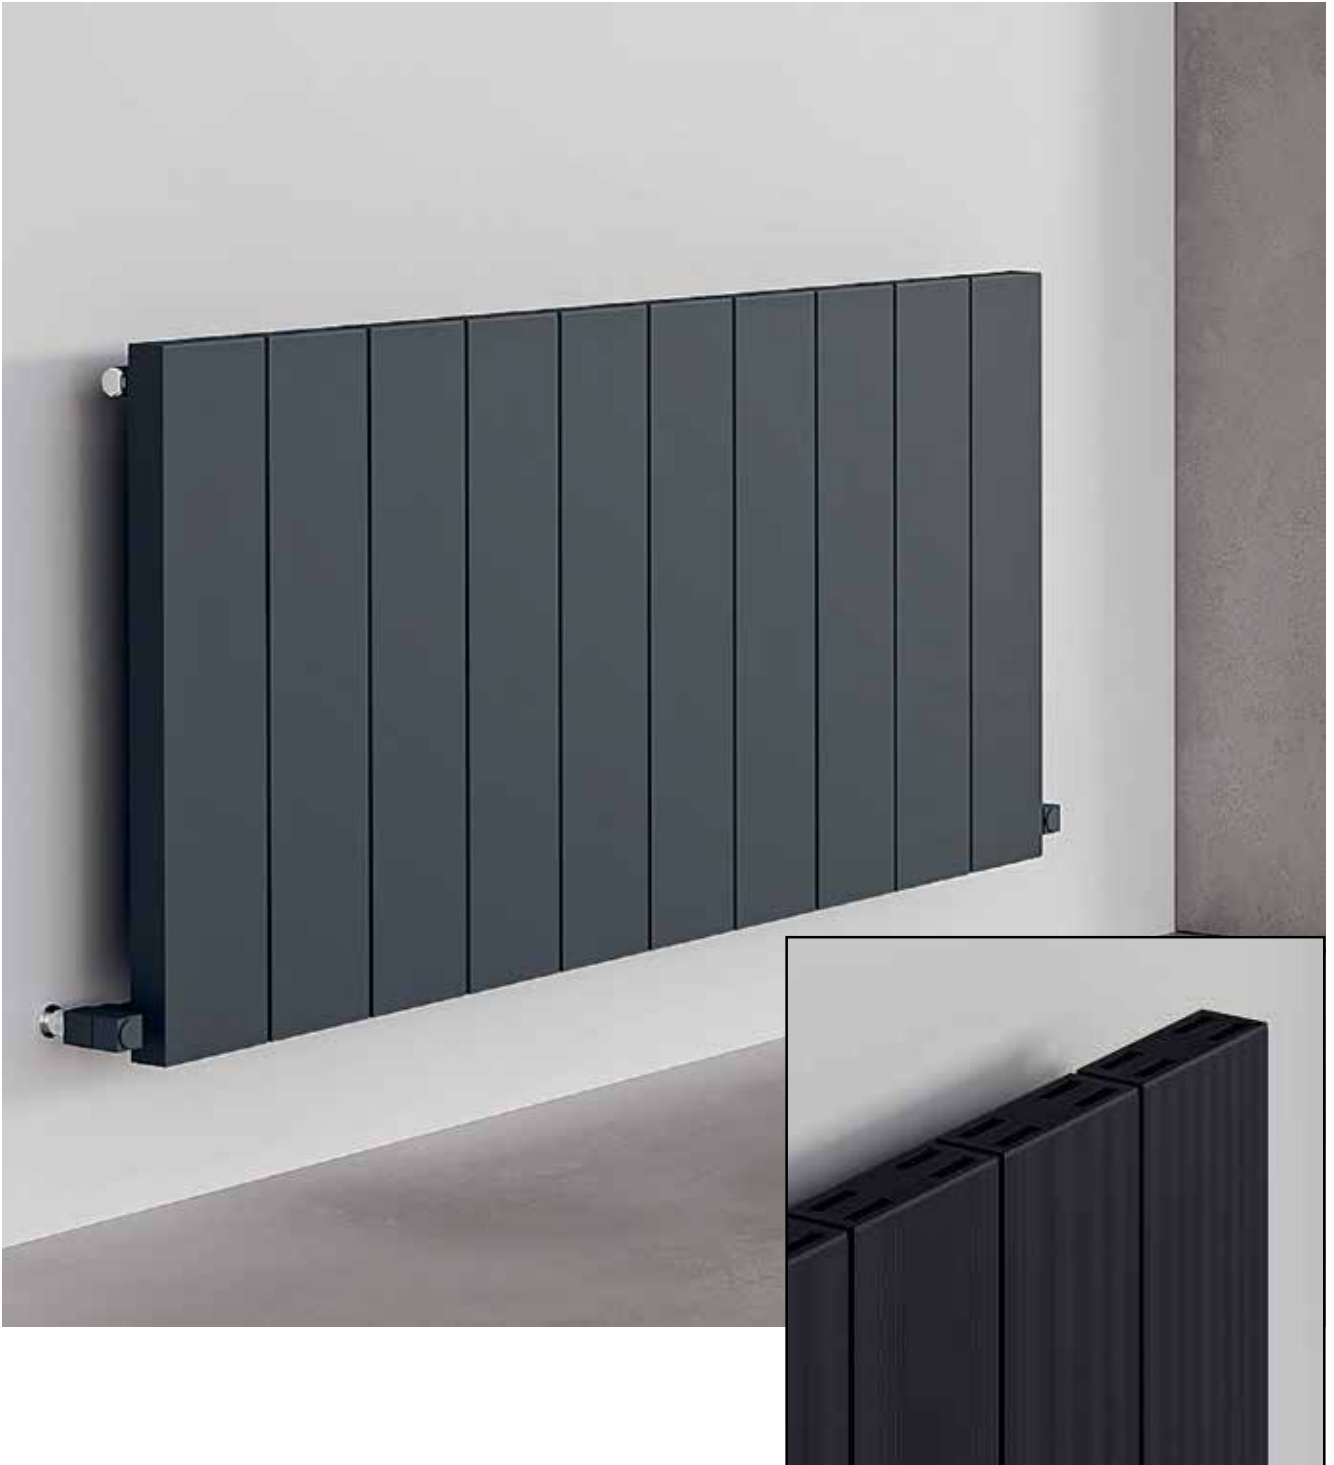



-  **Material Aluminium**
-  **Max. Working Pressure 10 bar**
-  **Connections 1/2"**
-  **Pipe Centre (W+90) mm**
-  **Radiator width for made to order size (mm) ((n × 50) - 10) mm**
-  **Guarantee 5 years**
-  **Max. Working Temperature 95°C**
-  **Sections Width 40 mm**





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10ELV1800037003	1800	370	3	460	1740	30-50	85-105	17,9	1,4	C	997	3401	5232
10ELV1800049504	1800	495	4	585	1740	30-50	85-105	23,8	1,9	C	1330	4534	6976
10ELV0600074506	600	745	6	835	540	30-50	85-105	11,9	0,9	C	693	2362	3634
10ELV0600099508	600	995	8	1085	540	30-50	85-105	15,9	1,2	C	924	3150	4846
10ELV0600124510	600	1245	10	1335	540	30-50	85-105	19,9	1,6	C	1155	3937	6057

A full range of made to order size available.

-  **Material Aluminium**
-  **Max. Working Pressure 10 bar**
-  **Connections 1/2"**
-  **Sections Depth 70 mm**
- Radiator width for made to order size (mm)**
((n × 125) - 5) mm
-  **Guarantee 5 years**
-  **Max. Working Temperature 95°C**
-  **Sections Width 120 mm**
-  **Pipe Centre (W+90) mm**





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10EFD0300099508	300	995	8	1085	160	13,0	1,3	C	516	1760	2708
10EFD0300124510	300	1245	10	1335	160	16,3	1,6	C	645	2200	3385
10EFD0300149512	300	1495	12	1585	160	19,5	1,9	C	774	2640	4062

A full range of made to order size available.


 **Material Aluminium**


 **Max. Working Pressure 10 bar**


 **Connections 1/2"**


 **Sections Depth 110 mm**

Radiator width for made to order size (mm)
 $((n \times 125) - 5)$ mm

 **Guarantee 5 years**

 **Max. Working Temperature 95°C**

 **Sections Width 120 mm**

 **Pipe Centre (W+90) mm**





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10ELF0300099508	300	995	8	1085	160	30-50	85-105	6,0	0,9	C	366	1248	1920
10ELF0300124510	300	1245	10	1335	160	30-50	85-105	8,0	1,1	C	457	1558	2397
10ELF0300149512	300	1495	12	1585	160	30-50	85-105	10,0	1,3	C	548	1869	2875

A full range of made to order size available.

Material **Aluminium**

Max. Working Pressure **10 bar**

Connections **1/2"**

Sections Depth **70 mm**

Radiator width for made to order size (mm)
((n × 125) - 5) mm

Guarantee **5 years**

Max. Working Temperature **95°C**

Sections Width **120 mm**

Pipe Centre **(W+90) mm**









Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10NIX1800020502	1800	205	2	295	1740	30-50	105-125	9,7	1,3	C	487	1661	2555
10NIX1800041504	1800	415	4	505	1740	30-50	105-125	19,0	2,6	C	974	3321	5110
10NIX0600062506	600	625	6	715	540	30-50	105-125	10,6	1,3	C	567	1933	2975
10NIX0600083508	600	835	8	925	540	30-50	105-125	14,1	1,7	C	756	2578	3966
10NIX0600104510	600	1045	10	1135	540	30-50	105-125	17,5	2,1	C	945	3222	4958
10NIX0600125512	600	1255	12	1345	540	30-50	105-125	21,0	2,5	C	1134	3867	5949

A full range of made to order size available.


 Material
Aluminium


 Max. Working Pressure
10 bar


 Connections
1/2"


 Sections Depth
90 mm

Radiator width for made to order size (mm)
((n × 105) - 5) mm

 Guarantee
5 years

 Max. Working Temperature
95°C

 Sections Width
100 mm

 Pipe Centre
(W+90) mm










Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10GAI1800035504	1800	355	4	445	1740	30-50	105-125	18,0	2,5	C	941	3207	4935
10GAI1800043005	1800	430	5	520	1740	30-50	105-125	22,2	3,2	C	1167	3981	6124
10GAI1800050506	1800	505	6	595	1740	30-50	105-125	26,4	3,8	C	1394	4754	7314
10GAI0600073009	600	730	9	820	540	30-50	105-125	14,3	1,9	C	805	2745	4223
10GAI0600088011	600	880	11	970	540	30-50	105-125	17,3	2,3	C	981	3345	5146
10GAI0600103013	600	1030	13	1120	540	30-50	105-125	20,4	2,7	C	1157	3945	6070

A full range of made to order size available.


 Material
Aluminium


 Max. Working Pressure
10 bar


 Connections
1/2"


 Sections Depth
90 mm

Radiator width for made to order size (mm)
 $((n-2) \times 75) + 205$ mm

 Guarantee
5 years

 Max. Working Temperature
95°C

 Sections Width
70-100 mm

 Pipe Centre
(W+90) mm







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10VES1800029504	1800	295	4	385	1740	30-50	105-125	17,0	2,5	C	907	3094	4759
10VES1800037005	1800	370	5	460	1740	30-50	105-125	21,2	3,2	C	1134	3867	5949
10VES1800044506	1800	445	6	535	1740	30-50	105-125	25,4	3,8	C	1361	4640	7139
10VES0600074510	600	745	10	835	540	30-50	105-125	15,4	2,1	C	880	3000	4615
10VES0600089512	600	895	12	985	540	30-50	105-125	18,4	2,5	C	1056	3600	5538
10VES0600104514	600	1045	14	1135	540	30-50	105-125	21,4	2,9	C	1232	4200	6461

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Sections Depth
90 mm



Guarantee
5 years



Max. Working Temperature
95°C



Sections Width
70 mm



Pipe Centre
(W+90) mm

Radiator width for made to order size (mm)
((n × 75) - 5) mm







Image shown is a special connection product

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
100TT1800031504	1800	315	4	405	1740	30-50	115-125	19,1	2,5	C	962	3280	5047
100TT1800039505	1800	395	5	485	1740	30-50	115-125	23,9	3,2	C	1203	4101	6309
100TT1800047506	1800	475	6	565	1740	30-50	115-125	28,6	3,8	C	1443	4921	7570
100TT0600079510	600	795	10	885	540	30-50	115-125	15,9	2,1	C	933	3182	4896
100TT0600095512	600	955	12	1045	540	30-50	115-125	19,1	2,5	C	1120	3819	5875

A full range of made to order size available.

Material
Aluminium

Max. Working Pressure
10 bar

Connections
1/2"

Sections Depth
100 mm

Radiator width for made to order size (mm)
((n × 80) - 5) mm

Guarantee
5 years

Max. Working Temperature
95°C

Sections Width
75 mm

Pipe Centre
(W+90) mm










Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10MOS1800028003	1800	280	3	370	1775	55	97	11,8	1,4	C	946	3224	4961
10MOS1800037504	1800	375	4	465	1775	55	97	15,5	1,9	C	1261	4299	6614
10MOS1800047005	1800	470	5	560	1775	55	97	19,3	2,4	C	1576	5374	8268
10MOS1800056506	1800	565	6	655	1775	55	97	23,0	2,9	C	1891	6449	9922
10MOS0600047005	600	470	5	560	575	55	97	7,5	0,8	C	612	2085	3208
10MOS0600066007	600	660	7	750	575	55	97	10,3	1,1	C	856	2919	4492
10MOS0600085009	600	850	9	940	575	55	97	13,1	1,4	C	1101	3754	5775
10MOS0600104011	600	1040	11	1130	575	55	97	15,9	1,8	C	1345	4588	7058
10MOS0600123013	600	1230	13	1320	575	55	97	18,7	2,1	C	1590	5422	8341

A full range of made to order size available.


 Material
Aluminium


 Max. Working Pressure
10 bar


 Connections
1/2"


 Sections Depth
80 mm

Radiator width for made to order size (mm)
((n × 95) - 5) mm

 Guarantee
5 years

 Max. Working Temperature
95°C

 Sections Width
90 mm

 Pipe Centre
(W+90) mm










Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10MOC1800028003	1800	280	3	370	1775	55	97	11,8	1,4	C	946	3224	4961
10MOC1800037504	1800	375	4	465	1775	55	97	15,5	1,9	C	1261	4299	6614
10MOC1800047005	1800	470	5	560	1775	55	97	19,3	2,4	C	1576	5374	8268
10MOC1800056506	1800	565	6	655	1775	55	97	23,0	2,9	C	1891	6449	9922
10MOC0600047005	600	470	5	560	575	55	97	7,5	0,8	C	612	2085	3208
10MOC0600066007	600	660	7	750	575	55	97	10,3	1,1	C	856	2919	4492
10MOC0600085009	600	850	9	940	575	55	97	13,1	1,4	C	1101	3754	5775
10MOC0600104011	600	1040	11	1130	575	55	97	15,9	1,8	C	1345	4588	7058
10MOC0600123013	600	1230	13	1320	575	55	97	18,7	2,1	C	1590	5422	8341

A full range of made to order size available.


 Material **Aluminium**


 Max. Working Pressure **10 bar**


 Connections **1/2"**


 Sections Depth **80 mm**

Radiator width for made to order size (mm)
((n × 95) - 5) mm

 Guarantee **5 years**

 Max. Working Temperature **95°C**

 Sections Width **90 mm**

 Pipe Centre **(W+90) mm**










Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10MOD1800028003	1800	280	3	370	1775	55	97	11,8	1,4	C	946	3224	4961
10MOD1800037504	1800	375	4	465	1775	55	97	15,5	1,9	C	1261	4299	6614
10MOD1800047005	1800	470	5	560	1775	55	97	19,3	2,4	C	1576	5374	8268
10MOD1800056506	1800	565	6	655	1775	55	97	23,0	2,9	C	1891	6449	9922
10MOD0600047005	600	470	5	560	575	55	97	7,5	0,8	C	612	2085	3208
10MOD0600066007	600	660	7	750	575	55	97	10,3	1,1	C	856	2919	4492
10MOD0600085009	600	850	9	940	575	55	97	13,1	1,4	C	1101	3754	5775
10MOD0600104011	600	1040	11	1130	575	55	97	15,9	1,8	C	1345	4588	7058
10MOD0600123013	600	1230	13	1320	575	55	97	18,7	2,1	C	1590	5422	8341

A full range of made to order size available.


 Material **Aluminium**


 Max. Working Pressure **10 bar**


 Connections **1/2"**


 Sections Depth **80 mm**

Radiator width for made to order size (mm)
((n × 95) - 5) mm

 Guarantee **5 years**

 Max. Working Temperature **95°C**

 Sections Width **90 mm**

 Pipe Centre **(W+90) mm**







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10TUB1800027006	1800	270	6	360	1750	65	113	13,9	3,2	C	982	3349	5151
10TUB1800036008	1800	360	8	450	1750	65	113	18,5	4,3	C	1310	4466	6868
10TUB1800045010	1800	450	10	540	1750	65	113	23,1	5,4	C	1637	5582	8585
10TUB1800054012	1800	540	12	630	1750	65	113	27,7	6,5	C	1964	6699	10302
10TUB0600054012	600	540	12	630	550	65	113	11,3	2,4	C	770	2627	4040
10TUB0600072016	600	720	16	810	550	65	113	15,0	3,2	C	1027	3503	5387
10TUB0600081018	600	810	18	900	550	65	113	16,9	3,6	C	1155	3939	6057
10TUB0600090020	600	900	20	990	550	65	113	18,8	4	C	1284	4378	6734

A full range of made to order size available.

Al Material
Aluminium

Max. Working Pressure
10 bar

Connections
1/2"

Sections Depth
95 mm

Radiator width for made to order size (mm)
((n × 45) mm)

Guarantee
5 years


Max. Working Temperature
95°C

Sections Width
25 mm

Pipe Centre
(W+90) mm





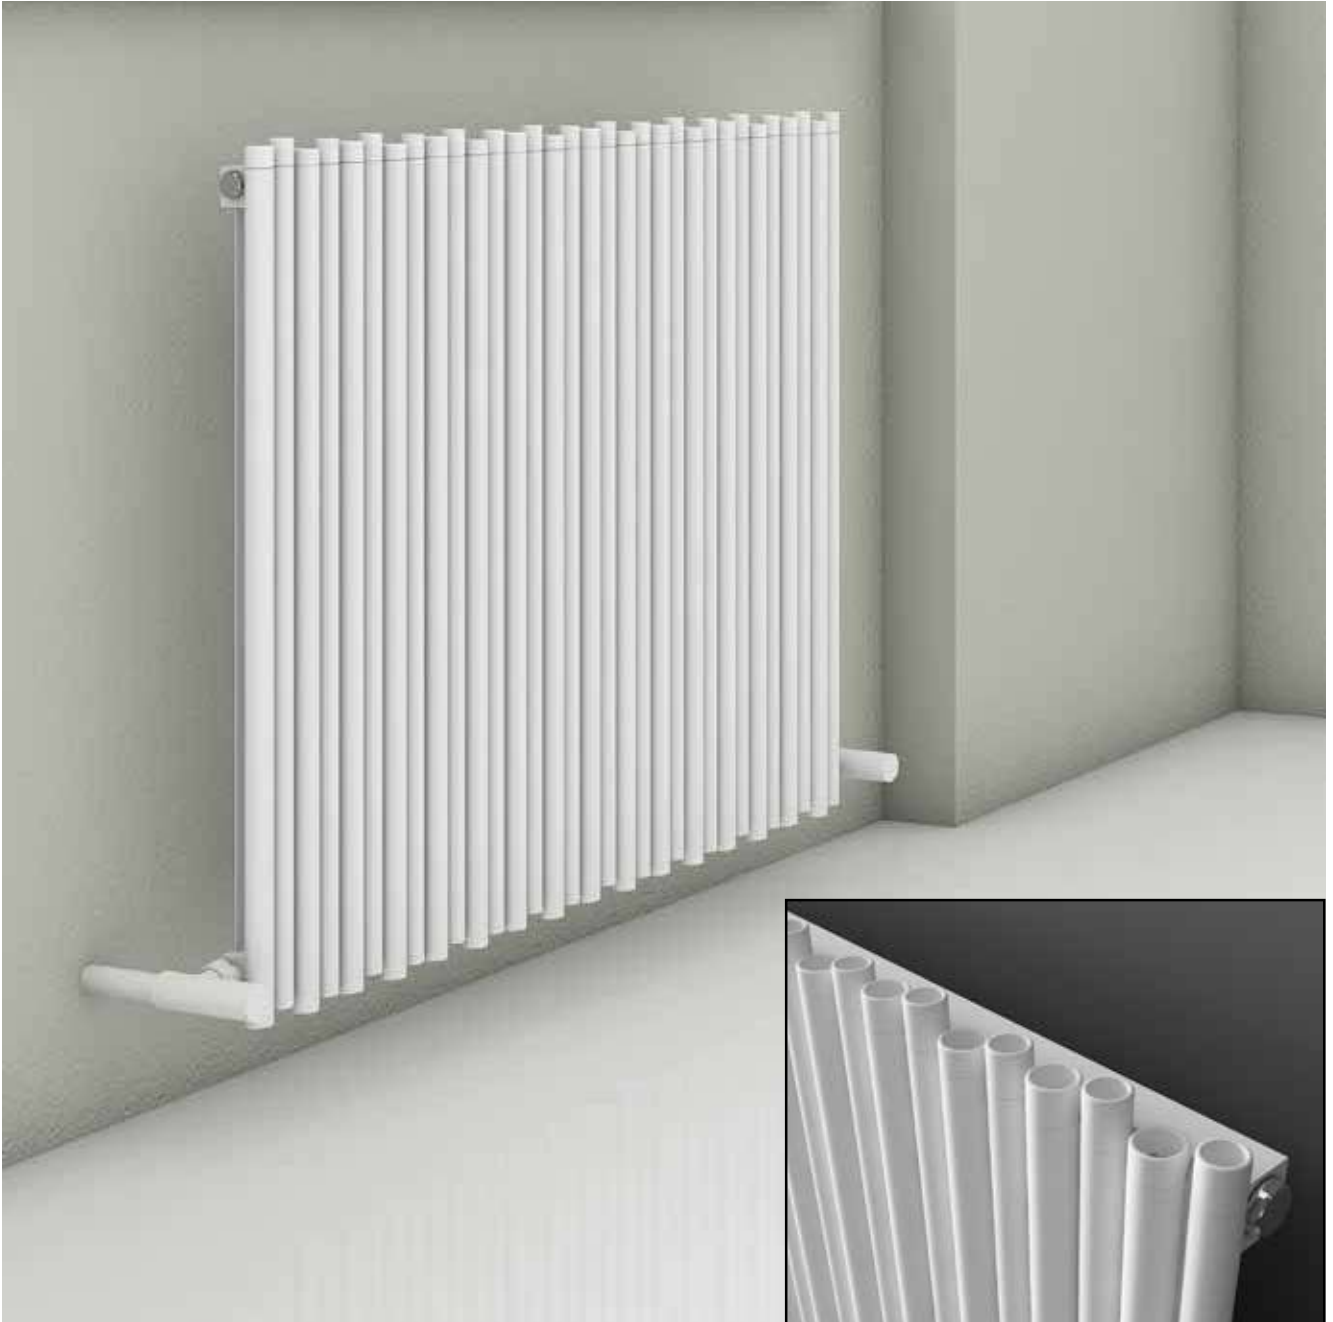

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10PIP1800028003	1800	280	3	370	1735	55	88	9,9	1,7	C	537	1830	2815
10PIP1800037504	1800	375	4	465	1735	55	88	13,1	2,3	C	715	2440	3753
10PIP1800047005	1800	470	5	560	1735	55	88	21,9	3,9	C	894	3050	4692
10PIP0600066007	600	660	7	750	535	55	88	8,1	1,4	C	488	1665	2562
10PIP0600085009	600	850	9	940	535	55	88	10,5	1,8	C	628	2141	3294
10PIP0600104011	600	1040	11	1130	535	55	88	12,8	2,2	C	767	2617	4026
10PIP0600123013	600	1230	13	1320	535	55	88	15,1	2,6	C	907	3092	4758

A full range of made to order size available.

Material
Aluminium

Max. Working Pressure
10 bar

Connections
1/2"

Sections Depth
46 mm

Radiator width for made to order size (mm)
((n × 95) - 5) mm

Guarantee
5 years

Max. Working Temperature
95°C

Sections Width
90 mm

Pipe Centre
(W+90) mm










Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10SOP1800033108	1800	331	8	421	1740	55	98	12,4	2,0	C	707	2412	3710
10SOP1800041510	1800	415	10	505	1740	55	98	15,3	2,7	C	884	3014	4638
10SOP0600049912	600	499	12	589	540	55	98	7,5	1,5	C	412	1404	2160
10SOP0600066716	600	667	16	757	540	55	98	9,6	2,0	C	549	1872	2880
10SOP0600083520	600	835	20	925	540	55	98	11,8	2,5	C	686	2340	3600

A full range of made to order size available.


 Material **Aluminium**


 Max. Working Pressure **10 bar**


 Connections **1/2"**


 Sections Depth **58 mm**

Radiator width for made to order size (mm)
((n × 42) - 5) mm

 Guarantee **5 years**

 Max. Working Temperature **95°C**

 Sections Width **27 mm**

 Pipe Centre **(W+90) mm**





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10SXL0331180008	331	1800	8	1740	49-69	92-112	7,1	2,0	C	707	2412	3710
10SXL0415180010	415	1800	10	1740	49-69	92-112	8,2	2,7	C	884	3014	4638
10SXL0583080014	583	800	14	740	49-69	92-112	5,1	1,6	C	837	2855	4393
10SXL0583100014	583	1000	14	940	49-69	92-112	6,4	2,0	C	917	3128	4813
10SXL0583120014	583	1200	14	1140	49-69	92-112	7,7	2,4	C	998	3401	5233
10SXL0583140014	583	1400	14	1340	49-69	92-112	8,9	2,8	C	1077	3671	5648
10SXL0583180014	583	1800	14	1740	49-69	92-112	11,4	3,7	C	1238	4220	6493

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Sections Depth
58 mm

Radiator height for made to order size (mm)
((n x 42) - 5) mm



Guarantee
5 years



Max. Working Temperature
95°C



Sections Width
27 mm



Pipe Centre
(W-60) mm





Dora is a perfect choice for modern and minimalist interiors



Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
12DOR1800029003	1800	290	3	380	66	145	33,5	C	728	2484	3821
12DOR1800039004	1800	390	4	480	66	145	44,7	C	972	3314	5099
12DOR1800049005	1800	490	5	580	66	145	56,0	C	1215	4145	6376
12DXL0290180003	290	1800	3	1720	66	145	33,5	C	728	2484	3821
12DXL0390180004	390	1800	4	1720	66	145	44,7	C	972	3314	5099
12DXL0490180005	490	1800	5	1720	66	145	56,0	C	1215	4145	6376



Material
Steel



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
3 years



Max. Working Temperature
95°C








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16HAL0930040003	930	400	3	50	66-81	82-97	4,8	5,1	C	152	519	798
16HAL1470040005	1470	400	5	50	66-81	82-97	8,0	8,5	C	204	695	1069


A full range of made to order size available.

 Material
Stainless Steel

 Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16OZZ0900050003	900	500	3	50	60-75	105-120	4,1	3,3	C	161	550	846
16OZZ1400050005	1400	500	5	50	60-75	105-120	5,2	5,5	C	268	913	1405

A full range of made to order size available.



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar



Max. Working Temperature
95°C



Connections
1/2"








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16KNG0770050006	770	500	6	80	65-80	85-100	10,1	8,5	D	373	1272	1957
16KNG1040050008	1040	500	8	80	65-80	85-100	13,0	11,4	D	497	1696	2610
16KNG1310050010	1310	500	10	80	65-80	85-100	16,2	14,2	D	622	2120	3262


A full range of made to order size available.

 Material
Stainless Steel

 **Guarantee Terms**
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16DOM1280080006	1280	800	6	50	65-80	85-100	11,8	9,0	C	406	1384	2130

A full range of made to order size available.



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar



Max. Working Temperature
95°C



Connections
1/2"








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16RUM0840040002	840	400	2	50	65-80	85-100	5,2	3,4	C	150	510	784
16RUM1280040003	1280	400	3	50	65-80	85-100	7,7	5,1	C	224	765	1176
16RUM1720040004	1720	400	4	50	65-80	85-100	10,1	6,9	C	299	1020	1569


A full range of made to order size available.

 Material
Stainless Steel

 Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16CAS0850056002	850	560	2	80	60-75	75-90	4,2	2,3	C	267	911	1402
16CAS1300056003	1300	560	3	80	60-75	75-90	5,2	2,8	C	278	946	1456
16CAS1750056004	1750	560	4	80	60-75	75-90	6,2	3,2	C	491	1675	2576

A full range of made to order size available.



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar




Max. Working Temperature
95°C



Connections
1/2"



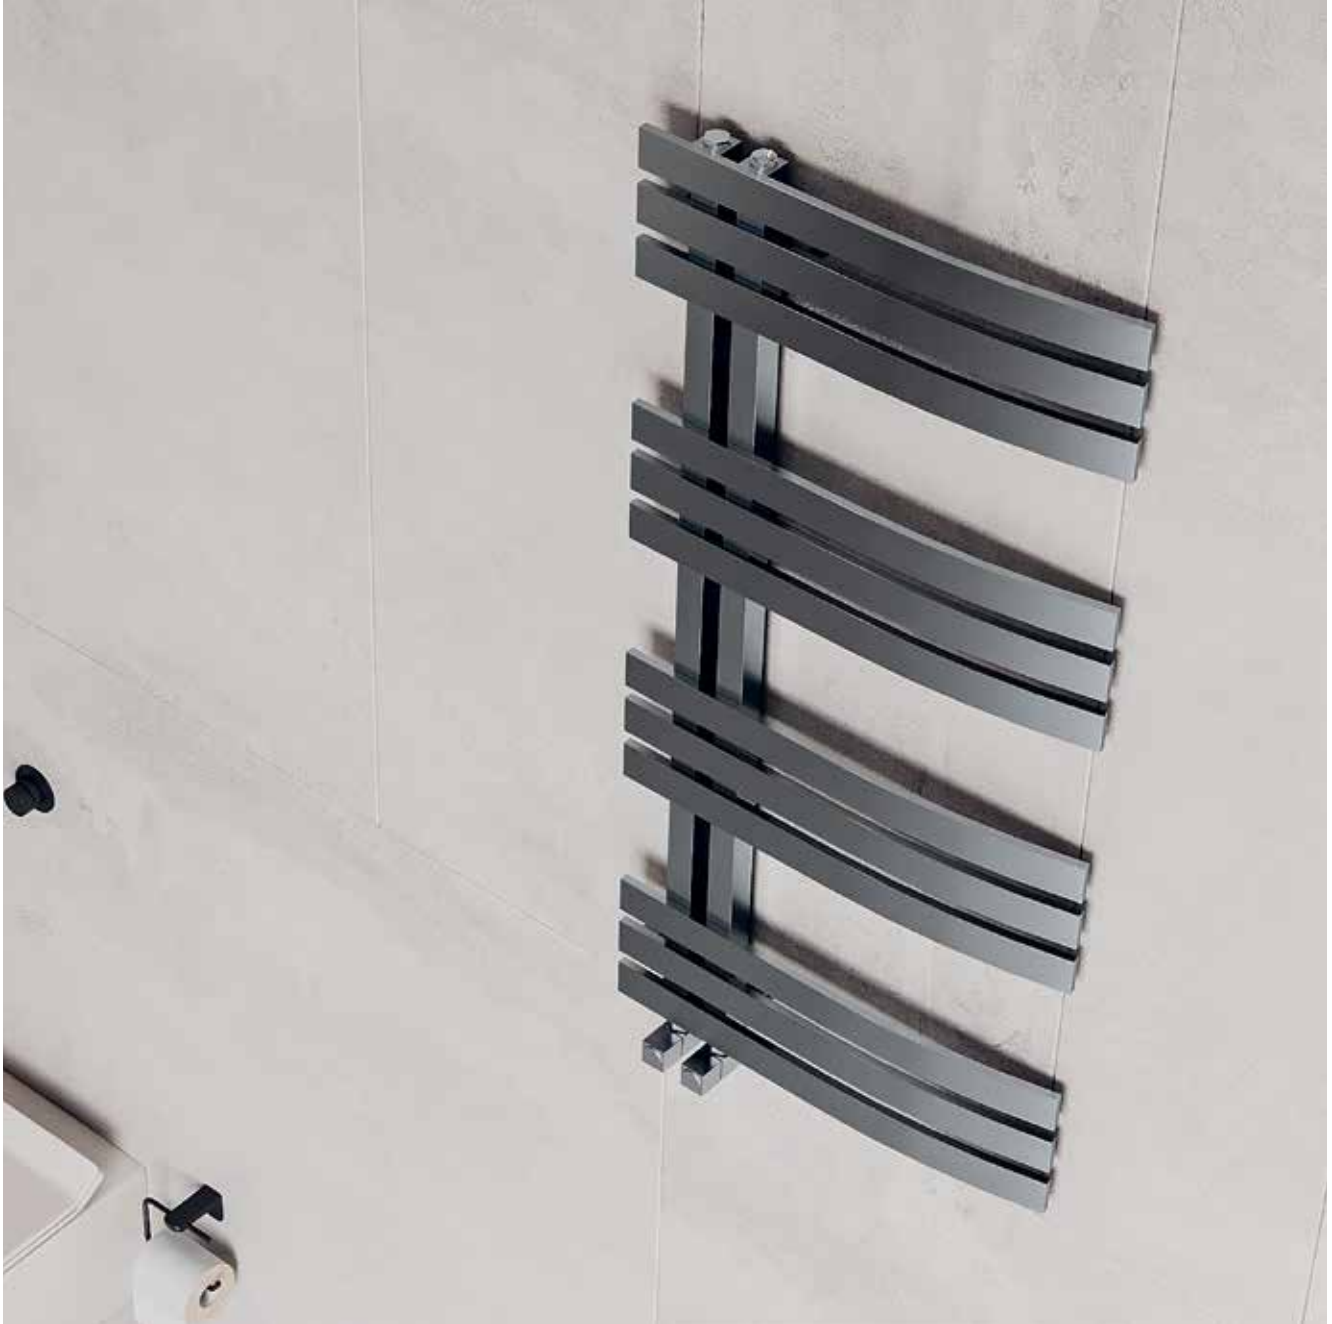




Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16ADR1000050012	1000	500	12	50	30-45	55-70	7,7	3,9	D	253	863	1327


A full range of made to order size available.

 Material
Stainless Steel

 Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16ALI1000050015	1000	500	15	50	30-45	65-80	9,6	4,9	D	245	837	1287

A full range of made to order size available.



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar



Max. Working Temperature
95°C



Connections
1/2"








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16ARL1000050008	1000	500	8	50	60-75	85-100	7,2	2,5	D	252	858	1320


A full range of made to order size available.

 Material
Stainless Steel

 Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16IBZ0440050003	440	500	3	50	60-75	85-100	3,1	0,9	D	117	399	614
16IBZ0770050005	770	500	5	50	60-75	85-100	5,2	1,6	D	188	640	984
16IBZ1130050007	1130	500	7	50	60-75	85-100	7,2	2,2	D	244	830	1277

A full range of made to order size available.



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar



Connections
1/2"



Max. Working Temperature
95°C







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15PAB1000024502	1000	245	2	50	40	113	4,6	0,5	C	296	1009	1553
15PAB1500024502	1500	245	2	50	40	113	6,9	1,0	C	444	1514	2329
15PAB1800024502	1800	245	2	50	40	113	8,2	1,2	C	533	1817	2795
15PAB2000024502	2000	245	2	50	40	113	9,2	1,3	C	592	2018	3105


A full range of made to order size available.

 **Material**
Aluminium

 **Max. Working Pressure**
10 bar

 **Connections**
1/2"

 **Guarantee**
5 years









 **Max. Working Temperature**
95°C





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15ELM1800037003	1800	370	3	460	1740	30-50	142-162	17,9	1,4	C	947	3231	4970

A full range of made to order size available.

-  Material **Aluminium**
-  Max. Working Pressure **10 bar**
-  Connections **1/2"**
- Radiator width for made to order size (mm)**
((n × 125) - 5) mm
-  Guarantee **5 years**
-  Max. Working Temperature **95°C**
-  Pipe Centre **(W+90) mm**
- 
- 




Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15ELB0800037003	800	370	3	460	740	30-50	142-162	7,5	0,9	C	675	2301	3540
15ELB1200037003	1200	370	3	460	1140	30-50	142-162	11,2	1,4	C	804	2741	4216
15ELB1500037003	1500	370	3	460	1440	30-50	142-162	14,0	1,7	C	901	3071	4725
15ELB1800037003	1800	370	3	460	1740	30-50	142-162	16,8	2,0	C	997	3401	5232


A full range of made to order size available.


 Material
Aluminium


 Max. Working Pressure
10 bar

 Connections
1/2"

Radiator width for made to order size (mm)
((n x 125) - 5) mm

 Guarantee
5 years

 Max. Working Temperature
95°C

 Pipe Centre
(W+90) mm







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15PLB1200018502	1200	185	2	50-275	1175	30-50	96-116	5,1	0,6	C	265	904	1390
15PLB1500018502	1500	185	2	50-275	1475	30-50	96-116	6,3	0,7	C	331	1129	1736
15PLB1800018502	1800	185	2	50-275	1767	30-50	107-127	7,6	1,2	C	397	1354	2083


A full range of made to order size available.


 Material
Aluminium


 Max. Working Pressure
10 bar

 Connections
1/2"

Radiator width for made to order size (mm)
((n × 95) - 5) mm

 Guarantee
5 years

 Max. Working Temperature
95°C

 Pipe Centre
50mm / (W+90) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15UNI0852050012	852	500	12	50	66-86	109-129	8	1,2	D	421	1434	2206
15UNI1296050018	1296	500	18	50	66-86	109-129	12	1,8	D	631	2151	3309
15UNI1740050024	1740	500	24	50	66-86	109-129	16	2,4	D	841	2867	4411

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
5 years



Max. Working Temperature
95°C





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15TER0852050012	852	500	12	50	66-86	109-129	8,0	1,2	D	421	1434	2206
15TER1296050018	1296	500	18	50	66-86	109-129	12,0	1,8	D	631	2151	3309
15TER1740050024	1740	500	24	50	66-86	109-129	16,0	2,4	D	841	2867	4411

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
5 years



Max. Working Temperature
95°C





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15TRL0800050008	800	500	8	50	66-86	109-129	5,3	1,1	D	284	968	1489
15TRL1200050012	1200	500	12	50	66-86	109-129	8,8	1,7	D	426	1451	2233
15TRL1600050016	1600	500	16	50	66-86	109-129	10,6	2,3	D	567	1935	2977

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
5 years



Max. Working Temperature
95°C







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15MON0800050004	800	500	4	400	70-90	130-150	5,3	0,9	D	245	835	1285
15MON1200050006	1200	500	6	400	70-90	130-150	7,7	1,3	D	360	1228	1889
15MON1600050008	1600	500	8	400	70-90	130-150	10,2	1,7	D	474	1616	2487


A full range of made to order size available.


 Material
Aluminium

 Max. Working Pressure
10 bar

 Connections
1/2"



 Guarantee
5 years

 Max. Working Temperature
95°C





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15MOL0800050004	800	500	4	50	70-90	130-150	5,3	0,9	C	245	835	1285
15MOL1200050006	1200	500	6	50	70-90	130-150	7,7	1,3	C	360	1228	1889
15MOL1600050008	1600	500	8	50	70-90	130-150	10,2	1,7	C	474	1616	2487

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Sections Depth
80 mm



Guarantee
5 years



Max. Working Temperature
95°C



Sections Width
70 mm







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15NXB1200020502	1200	205	2	50-295	1140	30-50	135-155	6,5	0,9	C	393	1339	2060
15NXB1500020502	1500	205	2	50-295	1440	30-50	135-155	8,1	1,1	C	440	1499	2306
15NXB1800020502	1800	205	2	50-295	1740	30-50	135-155	9,7	1,3	C	487	1661	2555


A full range of made to order size available.


 Material
Aluminium


 Max. Working Pressure
10 bar

 Connections
1/2"


Radiator width for made to order size (mm)
((n × 105) - 5) mm

 Guarantee
5 years

 Max. Working Temperature
95°C

 Pipe Centre
50mm / (W+90) mm



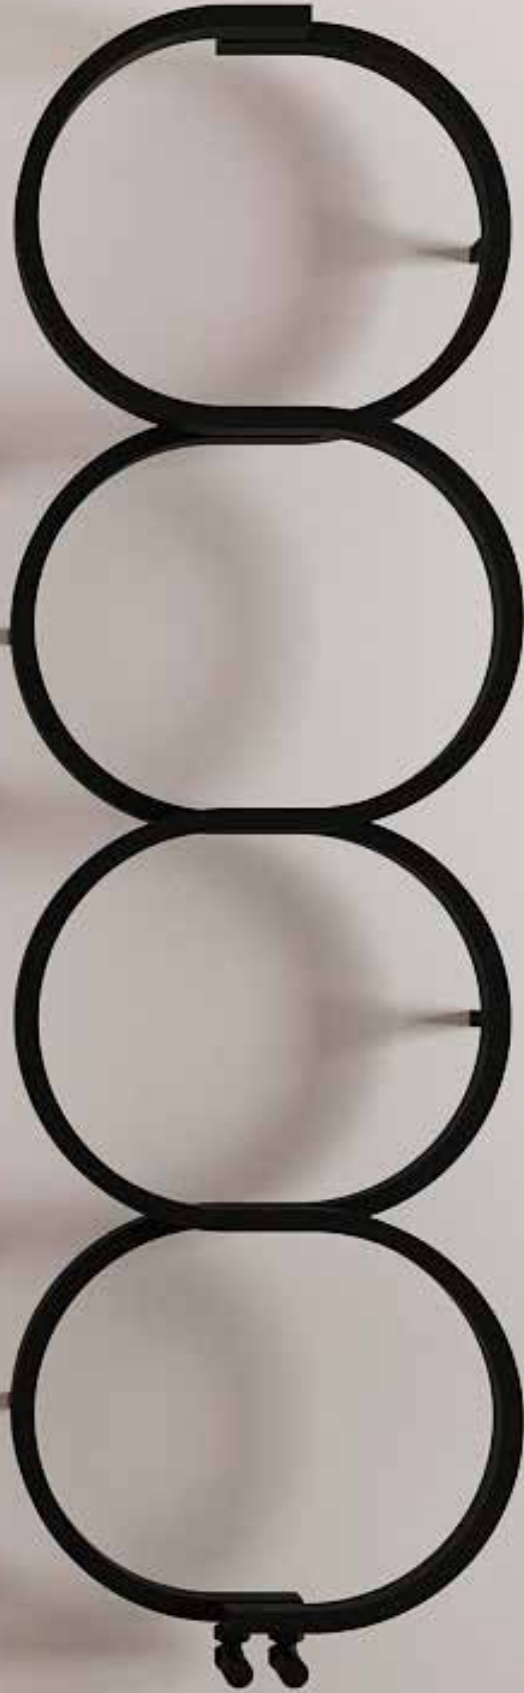



Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
17KSN0740045502	740	455	2	50	65-80	120-135	5,3	1,8	C	128	433	667
17KSN1100045503	1100	455	3	50	65-80	120-135	6,9	2,5	C	191	651	1002
17KSN1460045504	1460	455	4	50	65-80	120-135	8,6	3,1	C	255	868	1336

A full range of made to order size available.



Material
Steel



Guarantee Terms
3 years



Max. Working Pressure
10 bar



Max. Working Temperature
95°C



Connections
1/2"








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15MAW1600050006	1600	500	6	463	35-50	95-110	8,9	1,4	D	305	1037	1597

A full range of made to order size available.


 Material
Aluminium


 Max. Working Pressure
10 bar


 Connections
1/2"

 Sections Depth
74 mm



 Guarantee
5 years

 Max. Working Temperature
95°C

 Sections Width
70 mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15MAF1600050006	1600	500	6	435	230	8,9	1,4	C	305	1037	1597

A full range of made to order size available.

Al Material
Aluminium

Max. Working Pressure
10 bar

Connections
1/2"

Sections Depth
74 mm

Guarantee
5 years

Max. Working Temperature
95°C

Sections Width
70 mm




REDHOT

COLLECTION



VERSAILLES	134	CLASH	185
SARP	135	GLOBUS	186
NEMO DOUBLE	136-137	QUADRATA	187
MONZA DOUBLE	138-139	GRACE	188
NEMO XL DOUBLE	140	ELEGANS	189
MONZA XL DOUBLE	141	ECLIPSE	190
NEMO	142-143	AJAX I-II	191
MONZA	144-145	ALYA BATH	192
NEMO XL	146	NINOVA BATH	193
MONZA XL	147	MACK BATH	194
SLIM	148-149	MACK BATH H	195
STEP	150-151	PLATA BATH	196
BURANO	152-153	PLATA BATH DOUBLE	197
TALLIS DOUBLE	154-155	FAME	198
TALLIS	156-157	FAME H	199
TALLIS XL DOUBLE	158	FRAME	200
TALLIS XL	159	BURTON	201
CHAMBORD DOUBLE	160-161	BARON L	202
CHAMBORD	162-163	LARA L	203
ANGERS DOUBLE	164-165	SOLEIL	204
ANGERS	166-167	LIGNE	205
PLATA DOUBLE	168-169	SOHO	206
PLATA	170-171	MAYRA	207
DUNE	172	ZARA	208
BURANO S	173	EDWARD	209
MACK	174	VICTORIA	210
ELITE	175	VINTAGE	211
TALENT	176	ALDO	212
PAROS	177	ETAGE	213
AREN	178	FLORIS	214
BARO	179	NILE	215
PAN	180		
SWING	181		
IVOR	182		
VIVI	183		
BECK	184		

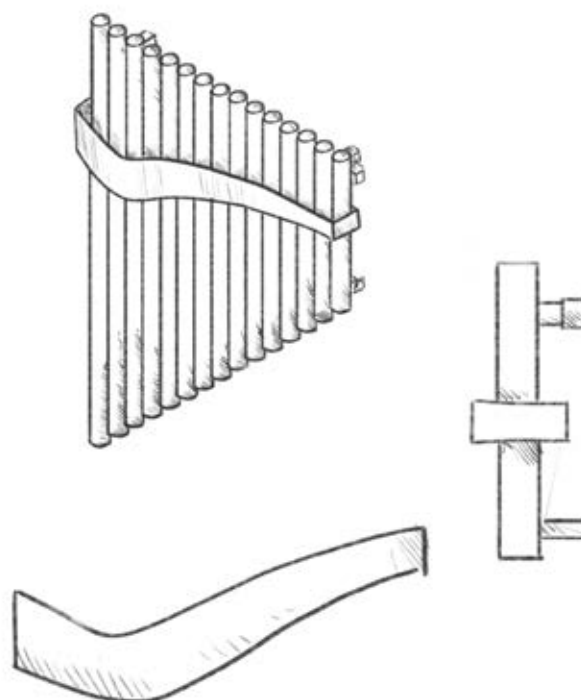



Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
11VER1000037008	1000	370	8	460	920	60-75	115-130	14,8	13,5	C	305	1039	1599
11VER1500037008	1500	370	8	460	1420	60-75	115-130	22,0	19,5	C	457	1559	2398
11VER1800037008	1800	370	8	460	1720	60-75	115-130	26,2	23,1	C	549	1871	2878
11VER2000037008	2000	370	8	460	1920	60-75	115-130	28,8	26,2	C	610	2078	3198

A full range of made to order size available.



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar



Max. Working Temperature
95°C



Connections
1/2"



Sections Width
40 mm



Pipe Centre
(W+90) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
11SRP1800026005	1800	260	5	350	1760	60-75	85-100	8,9	3,0	C	413	1408	2166
11SRP1800037007	1800	370	7	460	1760	60-75	85-100	12,5	4,3	C	619	2112	3250
11SRP0600059011	600	590	11	680	560	60-75	85-100	7,8	3,0	C	403	1373	2112
11SRP0600081015	600	810	15	900	560	60-75	85-100	10,6	4,1	C	537	1831	2816

A full range of made to order size available.



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar



Max. Working Temperature
95°C



Connections
1/2"



Sections Width
40 mm



Pipe Centre
(W+90) mm

Radiator width for made to order size (mm)
((n × 55) - 15) mm









Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10NMD1800028003	1800	280	3	370	1767	55	92	11,8	0,9	C	945	3224	4959
10NMD1800037504	1800	375	4	465	1767	55	92	15,7	1,2	C	1260	4298	6613
10NMD1800047005	1800	470	5	560	1767	55	92	19,6	1,5	C	1576	5373	8266
10NMD1800056506	1800	565	6	655	1767	55	92	23,4	1,8	C	1891	6447	9919
10NMD1800066007	1800	660	7	750	1767	55	92	27,3	2,1	C	2206	7522	11572
10NMD0600047005	600	470	5	560	575	55	90	6,7	0,7	C	554	1889	2905
10NMD0600066007	600	660	7	750	575	55	90	9,4	1,1	C	775	2644	4068
10NMD0600085009	600	850	9	940	575	55	90	12,1	1,4	C	997	3399	5230
10NMD0600104011	600	1040	11	1130	575	55	90	14,8	1,7	C	1218	4155	6392
10NMD0600123013	600	1230	13	1320	575	55	90	17,5	2,1	C	1440	4910	7554
10NMD0600142015	600	1420	15	1510	575	55	90	20,2	2,4	C	1661	5666	8716

A full range of made to order size available.


 Material
Aluminium


 Max. Working Pressure
10 bar


 Connections
1/2"


 Sections Depth
67 mm

Radiator width for made to order size (mm)
((n × 95) - 5) mm

 Guarantee
5 years

 Max. Working Temperature
95°C

 Sections Width
90 mm

 Pipe Centre
(W+90) mm







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10MND1800028003	1800	280	3	370	1767	55	92	11,8	0,9	C	945	3224	4959
10MND1800037504	1800	375	4	465	1767	55	92	15,7	1,2	C	1260	4298	6613
10MND1800047005	1800	470	5	560	1767	55	92	19,6	1,5	C	1576	5373	8266
10MND1800056506	1800	565	6	655	1767	55	92	23,4	1,8	C	1891	6447	9919
10MND1800066007	1800	660	7	750	1767	55	92	27,3	2,1	C	2206	7522	11572
10MND0600047005	600	470	5	560	575	55	90	6,7	0,7	C	554	1889	2905
10MND0600066007	600	660	7	750	575	55	90	9,4	1,1	C	775	2644	4068
10MND0600085009	600	850	9	940	575	55	90	12,1	1,4	C	997	3399	5230
10MND0600104011	600	1040	11	1130	575	55	90	14,8	1,7	C	1218	4155	6392
10MND0600123013	600	1230	13	1320	575	55	90	17,5	2,1	C	1440	4910	7554
10MND0600142015	600	1420	15	1510	575	55	90	20,2	2,4	C	1661	5666	8716

A full range of made to order size available.

Material
Aluminium

Max. Working Pressure
10 bar

Connections
1/2"

Sections Depth
67 mm

Radiator width for made to order size (mm)
((n × 95) - 5) mm

Guarantee
5 years

Max. Working Temperature
95°C

Sections Width
90 mm

Pipe Centre
(W+90) mm








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	W att Δ T50	BTU Δ T50	BTU Δ T70
10NDX0565080006	565	800	6	775	76-96	112-127	9,6	1,0	C	840	2865	4408
10NDX0565100006	565	1000	6	975	76-96	112-127	12,0	1,3	C	1051	3582	5511
10NDX0565120006	565	1200	6	1175	76-96	112-127	14,4	1,5	C	1261	4298	6613
10NDX0565140006	565	1400	6	1375	76-96	112-127	16,8	1,8	C	1471	5014	7715
10NDX0280180003	280	1800	3	1767	78-98	117-135	11,8	0,9	C	945	3224	4959
10NDX0375180004	375	1800	4	1767	78-98	117-135	15,7	1,2	C	1260	4298	6613
10NDX0470180005	470	1800	5	1767	78-98	117-135	19,6	1,5	C	1576	5373	8266
10NDX0565180006	565	1800	6	1767	78-98	117-135	23,4	1,8	C	1891	6447	9919

1A full range of made to order size available.


 Material
Aluminium


 Max. Working Pressure
10 bar


 Connections
1/2"

 Sections Depth
67 mm

Radiator width for made to order size (mm)
((n × 95) - 5) mm

 Guarantee
5 years

 Max. Working Temperature
95°C

 Sections Width
90 mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10MDX0565080006	565	800	6	775	76-96	112-127	9,6	1,0	C	840	2865	4408
10MDX0565100006	565	1000	6	975	76-96	112-127	12,0	1,3	C	1051	3582	5511
10MDX0565120006	565	1200	6	1175	76-96	112-127	14,4	1,5	C	1261	4298	6613
10MDX0565140006	565	1400	6	1375	76-96	112-127	16,8	1,8	C	1471	5014	7715
10MDX0280180003	280	1800	3	1767	78-98	117-135	11,8	0,9	C	945	3224	4959
10MDX0375180004	375	1800	4	1767	78-98	117-135	15,7	1,2	C	1260	4298	6613
10MDX0470180005	470	1800	5	1767	78-98	117-135	19,6	1,5	C	1576	5373	8266
10MDX0565180006	565	1800	6	1767	78-98	117-135	23,4	1,8	C	1891	6447	9919

A full range of made to order size available.

Material
Aluminium

Max. Working Pressure
10 bar

Connections
1/2"

Sections Depth
67 mm

Radiator width for made to order size (mm)
((n × 95) - 5) mm

Guarantee
5 years

Max. Working Temperature
95°C

Sections Width
90 mm







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10NMO1800028003	1800	280	3	370	1767	30-50	71-91	7,6	1,9	C	536	1828	2812
10NMO1800037504	1800	375	4	465	1767	30-50	71-91	10,1	2,5	C	715	2437	3750
10NMO1800047005	1800	470	5	560	1767	30-50	71-91	12,4	3,1	C	893	3046	4687
10NMO0600047005	600	470	5	560	575	30-50	60-80	4,5	0,8	C	377	1286	1979
10NMO0600066007	600	660	7	750	575	30-50	60-80	6,3	1,1	C	528	1801	2771
10NMO0600085009	600	850	9	940	575	30-50	60-80	8,1	1,4	C	679	2315	3562
10NMO0600104011	600	1040	11	1130	575	30-50	60-80	9,9	1,7	C	830	2830	4354
10NMO0600123013	600	1230	13	1320	575	30-50	60-80	11,8	2,1	C	981	3345	5145
10NMO0600142015	600	1420	15	1510	575	30-50	60-80	13,6	2,4	C	1132	3859	5937
10NMO0600161017	600	1610	17	1700	575	30-50	60-80	15,4	2,7	C	1283	4374	6729
10NMO0600180019	600	1800	19	1890	575	30-50	60-80	17,2	3,0	C	1433	4888	7520

A full range of made to order size available.

Material **Aluminium**

Max. Working Pressure **10 bar**

Connections **1/2"**

Sections Depth **46 mm**

Radiator width for made to order size (mm)
((n x 95) - 5) mm

Guarantee **5 years**

Max. Working Temperature **95°C**

Sections Width **90 mm**

Pipe Centre **(W+90) mm**





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10MNZ1800028003	1800	280	3	370	1767	30-50	71-91	7,8	0,9	C	601	2050	3154
10MNZ1800037504	1800	375	4	465	1767	30-50	71-91	10,3	1,2	C	802	2733	4205
10MNZ1800047005	1800	470	5	560	1767	30-50	71-91	12,8	1,5	C	1002	3417	5257
10MNZ0600047005	600	470	5	560	575	30-50	60-80	4,6	0,8	C	389	1326	2040
10MNZ0600066007	600	660	7	750	575	30-50	60-80	6,5	1,1	C	544	1856	2855
10MNZ0600085009	600	850	9	940	575	30-50	60-80	8,4	1,4	C	700	2386	3671
10MNZ0600104011	600	1040	11	1130	575	30-50	60-80	10,2	1,7	C	855	2917	4487
10MNZ0600123013	600	1230	13	1320	575	30-50	60-80	12,2	2,1	C	1011	3447	5303

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Sections Depth
46 mm

Radiator width for made to order size (mm)
((n × 95) - 5) mm



Guarantee
5 years



Max. Working Temperature
95°C



Sections Width
90 mm



Pipe Centre
(W+90) mm







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10NMX0565080006	565	800	6	775	50	80	6,1	1,3	C	475	1619	2490
10NMX0565100006	565	1000	6	975	50	80	7,7	1,7	C	593	2023	3113
10NMX0565120006	565	1200	6	1175	50	80	9,2	2,0	C	712	2428	3735
10NMX0565140006	565	1400	6	1375	50	80	10,7	2,3	C	831	2833	4358
10NMX0280180003	280	1800	3	1767	50	91	7,6	1,9	C	536	1828	2812
10NMX0375180004	375	1800	4	1767	50	91	10,0	2,5	C	715	2437	3750
10NMX0470180005	470	1800	5	1767	50	91	12,4	3,1	C	893	3046	4687
10NMX0565180006	565	1800	6	1767	50	91	14,9	3,7	C	1068	3642	5603

A full range of made to order size available.



Material
Aluminium



Guarantee Terms
5 Years



Max. Working Pressure
10 bar



Max. Working Temperature
95°C



Sections Width
90 mm



Connections
1/2"

Radiator height for made to order size (mm)
 $((n \times 95) - 5)$ mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10MNX0565080006	565	800	6	775	50	80	6,3	1,3	C	534	1822	2804
10MNX0565100006	565	1000	6	975	50	80	7,9	1,7	C	668	2278	3505
10MNX0565120006	565	1200	6	1175	50	80	9,5	2,0	C	802	2734	4206
10MNX0565140006	565	1400	6	1375	50	80	11,1	2,3	C	935	3189	4907
10MNX0280180003	280	1800	3	1767	50	91	7,8	0,9	C	601	2050	3154
10MNX0375180004	375	1800	4	1767	50	91	10,3	1,2	C	802	2733	4205
10MNX0470180005	470	1800	5	1767	50	91	12,8	1,5	C	1002	3417	5257
10MNX0565180006	565	1800	6	1767	50	91	15,3	1,8	C	1202	4100	6308

A full range of made to order size available.



Material
Aluminium



Guarantee Terms
5 Years



Max. Working Pressure
10 bar



Max. Working Temperature
95°C



Sections Width
90 mm



Connections
1/2"

Radiator height for made to order size (mm)
((n × 95) - 5) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10SLM1800028003	1800	280	3	370	1767	30-50	71-91	7,5	1,9	C	683	2328	3581
10SLM1800037504	1800	375	4	465	1767	30-50	71-91	9,5	2,5	C	910	3104	4775
10SLM1800047005	1800	470	5	560	1767	30-50	71-91	11,5	3,1	C	1138	3880	5969
10SLM0600047005	600	470	5	560	575	30-50	60-80	4,3	0,7	C	442	1506	2316
10SLM0600066007	600	660	7	750	575	30-50	60-80	6,0	1,1	C	618	2108	3243
10SLM0600085009	600	850	9	940	575	30-50	60-80	7,7	1,4	C	795	2710	4170
10SLM0600104011	600	1040	11	1130	575	30-50	60-80	9,4	1,7	C	971	3313	5096
10SLM0600123013	600	1230	13	1320	575	30-50	60-80	11,2	2,1	C	1148	3915	6023

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Sections Depth
46 mm

Radiator width for made to order size (mm)
((n × 95) - 5) mm



Guarantee
5 years



Max. Working Temperature
95°C



Sections Width
90 mm



Pipe Centre
(W+90) mm







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10STP1800028003	1800	280	3	370	1767	30-50	71-91	7,4	1,9	C	867	2956	4548
10STP1800037504	1800	375	4	465	1767	30-50	71-91	9,7	2,5	C	1156	3942	6064
10STP1800047005	1800	470	5	560	1767	30-50	71-91	12,1	3,1	C	1445	4927	7580
10STP0600047005	600	470	5	560	575	30-50	60-80	4,1	0,8	C	561	1912	2942
10STP0600066007	600	660	7	750	575	30-50	60-80	5,7	1,1	C	785	2677	4119
10STP0600085009	600	850	9	940	575	30-50	60-80	7,3	1,4	C	1009	3442	5295
10STP0600104011	600	1040	11	1130	575	30-50	60-80	8,9	1,7	C	1234	4207	6472
10STP0600123013	600	1230	13	1320	575	30-50	60-80	10,6	2,1	C	1458	4972	7649

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Sections Depth
46 mm

Radiator width for made to order size (mm)
((n × 95) - 5) mm



Guarantee
5 years



Max. Working Temperature
95°C



Sections Width
90 mm



Pipe Centre
(W+90) mm









Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10BUR1800028003	1800	280	3	50	1775	30-50	83-103	7,1	1,5	C	540	1841	2833
10BUR1800037504	1800	375	4	50	1775	30-50	83-103	9,5	2	C	720	2455	3777
10BUR1800047005	1800	470	5	50	1775	30-50	83-103	11,8	2,5	C	900	3069	4722
10BUR0600066007	600	660	7	50	575	30-50	83-103	6,9	1,1	C	489	1668	2566
10BUR0600085009	600	850	9	50	575	30-50	83-103	8,4	1,4	C	629	2144	3299
10BUR0600104011	600	1040	11	50	575	30-50	83-103	10,4	1,7	C	769	2621	4032
10BUR0600123013	600	1230	13	50	575	30-50	83-103	12,4	2,1	C	908	3097	4765

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Sections Depth
63 mm



Guarantee
5 years



Max. Working Temperature
95°C



Sections Width
90 mm

Radiator width for made to order size (mm)
((n × 95) - 5) mm







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10TLD1800035006	1800	350	6	440	1768	55	99	15,3	3,6	C	1187	4047	6227
10TLD1800047008	1800	470	8	560	1768	55	99	20,3	4,8	C	1583	5396	8302
10TLD0600071012	600	710	12	800	575	55	93	11,3	1,8	C	1089	3712	5711
10TLD0600095016	600	950	16	1040	575	55	93	13,4	2,4	C	1451	4949	7614
10TLD0600119020	600	1190	20	1280	575	55	93	16,8	3,0	C	1814	6186	9518

A full range of made to order size available.

Material
Aluminium

Max. Working Pressure
10 bar

Connections
1/2"

Sections Depth
76 mm

Radiator width for made to order size (mm)
((n x 60) - 10) mm

Guarantee
5 years

Max. Working Temperature
95°C

Sections Width
50 mm

Pipe Centre
(W+90) mm







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10TLL1800035006	1800	350	6	440	1768	55	99	9,1	3,6	C	743	2533	3897
10TLL1800047008	1800	470	8	560	1768	55	99	12,1	4,8	C	990	3378	5196
10TLL0600071012	600	710	12	800	575	55	93	9,0	1,5	C	681	2322	3572
10TLL0600095016	600	950	16	1040	575	55	93	11,6	2,0	C	908	3096	4763
10TLL0600119020	600	1190	20	1280	575	55	93	14,3	2,5	C	1135	3870	5954

A full range of made to order size available.

Material
Aluminium

Max. Working Pressure
10 bar

Connections
1/2"

Sections Depth
51 mm

Radiator width for made to order size (mm)
((n × 60) - 10) mm

Guarantee
5 years

Max. Working Temperature
95°C

Sections Width
50 mm

Pipe Centre
(W+90) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10TXD0350180006	350	1800	6	1768	-	55	99	15,3	3,6	C	1187	4049	6228
10TXD0470180008	470	1800	8	1768	-	55	99	20,3	4,8	C	1583	5398	8305
10TXD0590080010	590	800	10	775	-	55	93	11,6	1,6	C	879	2999	4614
10TXD0590100010	590	1000	10	975	-	55	93	14,5	2	C	1099	3749	5767
10TXD0590120010	590	1200	10	1175	-	55	93	17,4	2,4	C	1319	4498	6921
10TXD0590140010	590	1400	10	1375	-	55	93	20,3	2,8	C	1539	5248	8074
10TXD0590180010	590	1800	10	1768	-	55	99	25,3	6,0	C	1979	6748	10381

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Sections Depth
76 mm

Radiator height for made to order size (mm)
((n × 60) - 10) mm



Guarantee
5 years



Max. Working Temperature
95°C



Sections Width
50 mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10TXL0350180006	350	1800	6	1768	-	55	99	9,1	3,6	C	743	2533	3898
10TXL0470180008	470	1800	8	1768	-	55	99	12,1	4,8	C	991	3378	5197
10TXL0590080010	590	800	10	775	-	55	93	4,6	1,5	C	550	1875	2885
10TXL0590100010	590	1000	10	975	-	55	93	5,8	1,9	C	687	2344	3606
10TXL0590120010	590	1200	10	1175	-	55	93	6,9	2,3	C	825	2813	4327
10TXL0590140010	590	1400	10	1375	-	55	93	8,1	2,6	C	962	3282	5049
10TXL0590180010	590	1800	10	1768	-	55	99	15,1	6,0	C	1238	4222	6496

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Sections Depth
51 mm



Guarantee
5 years




Max. Working Temperature
95°C



Sections Width
50 mm

Radiator height for made to order size (mm)
((n × 60) - 10) mm



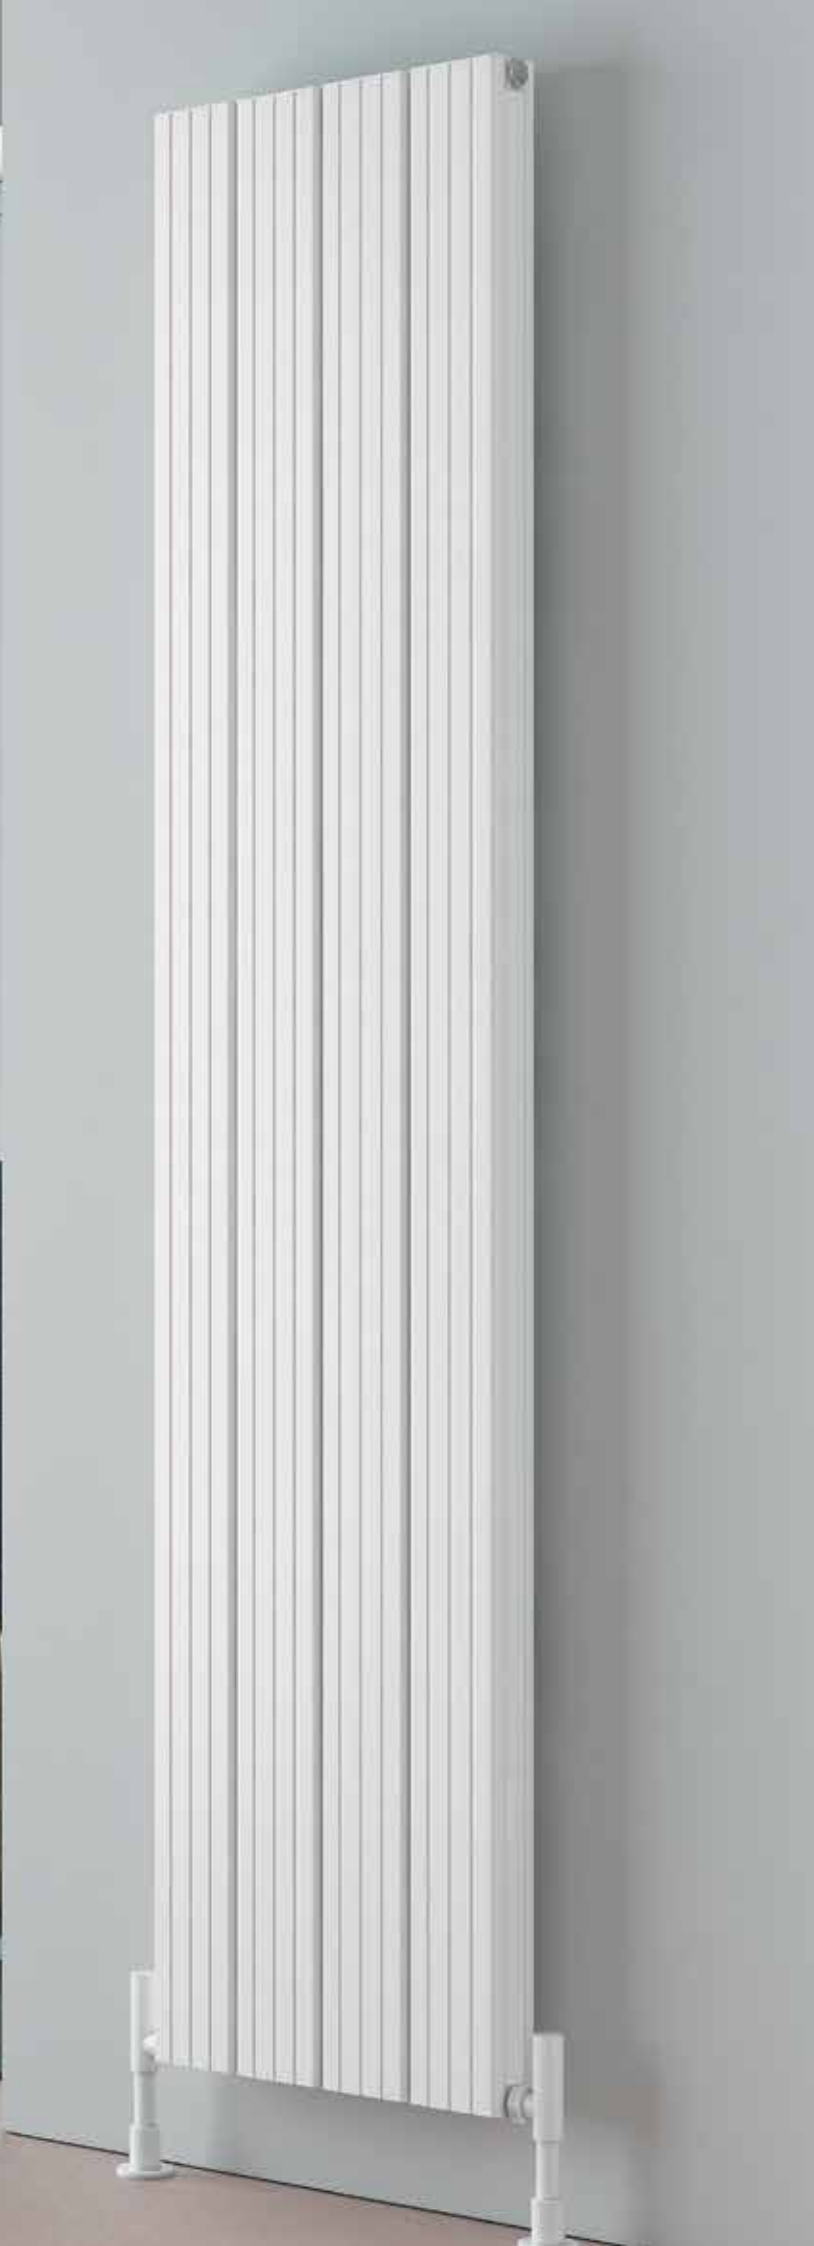






Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10CHD1800029503	1800	295	3	385	1775	55	86	9,0	0,8	C	806	2748	4227
10CHD1800039504	1800	395	4	485	1775	55	86	11,9	1,1	C	1074	3664	5636
10CHD1800049505	1800	495	5	585	1775	55	86	14,8	1,3	C	1343	4580	7046
10CHD0600049505	600	495	5	585	575	55	86	5,9	0,5	C	535	1826	2809
10CHD0600069507	600	695	7	785	575	55	86	8,2	0,7	C	750	2556	3932
10CHD0600089509	600	895	9	985	575	55	86	10,4	1,0	C	964	3286	5056
10CHD0600109511	600	1095	11	1185	575	55	86	12,7	1,2	C	1178	4016	6179
10CHD0600129513	600	1295	13	1385	575	55	86	14,9	1,4	C	1392	4747	7303

A full range of made to order size available.


 Material **Aluminium**


 Max. Working Pressure **10 bar**


 Connections **1/2"**


 Sections Depth **61 mm**

Radiator width for made to order size (mm)
((n × 100) - 5) mm

 Guarantee **5 years**

 Max. Working Temperature **95°C**

 Sections Width **95 mm**

 Pipe Centre **(W+90) mm**










Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10CHB1800029503	1800	295	3	385	1775	55	86	5,8	0,8	C	580	1978	3044
10CHB1800039504	1800	395	4	485	1775	55	86	7,6	1,1	C	774	2638	4058
10CHB1800049505	1800	495	5	585	1775	55	86	9,4	1,3	C	967	3297	5073
10CHB0600049505	600	495	5	585	575	55	86	4,1	0,5	C	375	1277	1965
10CHB0600069507	600	695	7	785	575	55	86	5,7	0,7	C	524	1788	2751
10CHB0600089509	600	895	9	985	575	55	86	7,2	1,0	C	674	2299	3538
10CHB0600109511	600	1095	11	1185	575	55	86	8,7	1,2	C	824	2810	4324
10CHB0600129513	600	1295	13	1385	575	55	86	10,3	1,4	C	974	3321	5110

A full range of made to order size available.


 Material
Aluminium


 Max. Working Pressure
10 bar

 Connections
1/2"


 Sections Depth
43 mm

Radiator width for made to order size (mm)
((n × 100) - 5) mm

 Guarantee
5 years

 Max. Working Temperature
95°C

 Sections Width
95 mm

 Pipe Centre
(W+90) mm









Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10AND1800029503	1800	295	3	385	1775	55	86	9,0	0,8	C	806	2748	4227
10AND1800039504	1800	395	4	485	1775	55	86	11,9	1,1	C	1074	3664	5636
10AND1800049505	1800	495	5	585	1775	55	86	14,8	1,3	C	1343	4580	7046
10AND0600049505	600	495	5	585	575	55	86	5,9	0,5	C	535	1826	2809
10AND0600069507	600	695	7	785	575	55	86	8,2	0,7	C	750	2556	3932
10AND0600089509	600	895	9	985	575	55	86	10,4	1,0	C	964	3286	5056
10AND0600109511	600	1095	11	1185	575	55	86	12,7	1,2	C	1178	4016	6179
10AND0600129513	600	1295	13	1385	575	55	86	14,9	1,4	C	1392	4747	7303

A full range of made to order size available.


 Material **Aluminium**


 Max. Working Pressure **10 bar**

 Connections **1/2"**


 Sections Depth **61 mm**

Radiator width for made to order size (mm)
((n × 100) - 5) mm

 Guarantee **5 years**


 Max. Working Temperature **95°C**

 Sections Width **95 mm**

 Pipe Centre **(W+90) mm**





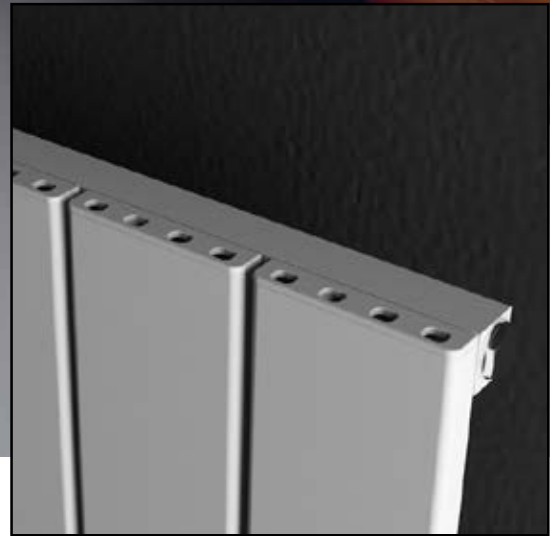










Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10ANG1800029503	1800	295	3	385	1775	55	86	5,8	0,8	C	574	1958	3012
10ANG1800039504	1800	395	4	485	1775	55	86	7,6	1,1	C	766	2611	4016
10ANG1800049505	1800	495	5	585	1775	55	86	9,4	1,3	C	957	3263	5021
10ANG0600049505	600	495	5	585	575	55	86	4,1	0,5	C	377	1287	1979
10ANG0600069507	600	695	7	785	575	55	86	5,7	0,7	C	528	1801	2771
10ANG0600089509	600	895	9	985	575	55	86	7,2	1,0	C	679	2316	3563
10ANG0600109511	600	1095	11	1185	575	55	86	8,8	1,2	C	830	2831	4355
10ANG0600129513	600	1295	13	1385	575	55	86	10,3	1,4	C	981	3345	5146

A full range of made to order size available.

-  **Material Aluminium**
-  **Max. Working Pressure 10 bar**
-  **Connections 1/2"**
-  **Sections Depth 43 mm**
- Radiator width for made to order size (mm) ((n × 100) - 5) mm**
-  **Guarantee 5 years**
-  **Max. Working Temperature 95°C**
-  **Sections Width 95 mm**
-  **Pipe Centre (W+90) mm**
- 





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10PLD1800028004	1800	280	4	370	1765	55	81	9,6	1,6	C	748	2551	3924
10PLD1800035005	1800	350	5	440	1765	55	81	11,9	2,0	C	935	3188	4905
10PLD1800042006	1800	420	6	510	1765	55	81	14,2	2,4	C	1122	3826	5886
10PLD1800049007	1800	490	7	580	1765	55	81	16,5	2,8	C	1309	4464	6867
10PLD1800056008	1800	560	8	650	1765	55	81	18,9	3,2	C	1496	5101	7848
10PLD0600042006	600	420	6	510	565	55	81	5,6	1,0	C	479	1632	2510
10PLD0600063009	600	630	9	720	565	55	81	8,3	1,4	C	718	2448	3765
10PLD0600084012	600	840	12	930	565	55	81	10,9	1,9	C	957	3263	5021
10PLD0600098014	600	980	14	1070	565	55	81	12,7	2,2	C	1117	3807	5857
10PLD0600119017	600	1190	17	1280	565	55	81	15,3	2,7	C	1356	4623	7112

A full range of made to order size available.

Al Material
Aluminium

Max. Working Pressure
10 bar

Connections
1/2"

Sections Depth
52 mm

Radiator width for made to order size (mm)
(n × 70) mm

Guarantee
5 years

Max. Working Temperature
95°C

Sections Width
60 mm

Pipe Centre
(W+90) mm







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10PLT1800028004	1800	280	4	370	1765	55	81	6,5	1,6	C	540	1841	2833
10PLT1800035005	1800	350	5	440	1765	55	81	8,1	2,0	C	675	2302	3541
10PLT1800042006	1800	420	6	510	1765	55	81	9,6	2,4	C	810	2762	4249
10PLT1800049007	1800	490	7	580	1765	55	81	11,2	2,8	C	945	3222	4958
10PLT1800056008	1800	560	8	650	1765	55	81	12,7	3,2	C	1080	3683	5666
10PLT0600042006	600	420	6	510	565	55	81	4,1	1,0	C	346	1179	1814
10PLT0600063009	600	630	9	720	565	55	81	6,0	1,4	C	519	1769	2722
10PLT0600084012	600	840	12	930	565	55	81	7,9	1,9	C	692	2359	3629
10PLT0600098014	600	980	14	1070	565	55	81	9,1	2,2	C	807	2752	4234
10PLT0600119017	600	1190	17	1280	565	55	81	11,0	2,7	C	980	3342	5141

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Sections Depth
39 mm



Guarantee
5 years



Max. Working Temperature
95°C



Sections Width
60 mm



Pipe Centre
(W+90) mm

Radiator width for made to order size (mm)
(n × 70) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt $\Delta T50$	BTU $\Delta T50$	BTU $\Delta T70$
10DNE1800028003	1800	280	3	370	1775	30-50	60-80	6,9	1,5	C	765	2607	4011
10DNE1800037504	1800	375	4	465	1775	30-50	60-80	9,2	2,0	C	1019	3476	5348
10DNE1800047005	1800	470	5	560	1775	30-50	60-80	11,5	2,5	C	1274	4345	6685
10DNE0600047005	600	470	5	560	575	30-50	60-80	4,5	0,8	C	495	1686	2594
10DNE0600066007	600	660	7	750	575	30-50	60-80	6,3	1,1	C	692	2361	3632
10DNE0600085009	600	850	9	940	575	30-50	60-80	8,1	1,4	C	890	3035	4670
10DNE0600104011	600	1040	11	1130	575	30-50	60-80	9,9	1,7	C	1088	3710	5708
10DNE0600123013	600	1230	13	1320	575	30-50	60-80	11,8	2,1	C	1286	4385	6745

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Sections Depth
46 mm

Radiator width for made to order size (mm)
((n x 95) - 5) mm



Guarantee
5 years



Max. Working Temperature
95°C



Sections Width
90 mm



Pipe Centre
(W+90) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10BUS1800037504	1800	375	4	50	1775	55	105	10,0	2,0	C	806	2750	4230
10BUS1800047005	1800	470	5	50	1775	55	105	12,4	2,5	C	1008	3437	5288
10BUS0600066007	600	660	7	50	575	55	105	6,9	1,1	C	548	1868	2874
10BUS0600085009	600	850	9	50	575	55	105	8,8	1,4	C	704	2402	3695
10BUS0600104011	600	1040	11	50	575	55	105	10,8	1,7	C	861	2935	4516
10BUS0600123013	600	1230	13	50	575	55	105	12,7	2,1	C	1017	3469	5337

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Sections Depth
63 mm



Guarantee
5 years



Max. Working Temperature
95°C



Sections Width
90 mm

Radiator width for made to order size (mm)
((n × 95) - 5) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10MAC1800031504	1800	315	4	405	1775	56-76	71-91	8,2	1,3	C	719	2452	3773
10MAC1800039505	1800	395	5	485	1775	56-76	71-91	10,1	1,7	C	899	3066	4716
10MAC1800047506	1800	475	6	565	1775	56-76	71-91	12,1	2,0	C	1079	3679	5660
10MAC0600079510	600	795	10	885	575	56-76	71-91	8,1	1,3	C	698	2379	3660
10MAC0600095512	600	955	12	1045	575	56-76	71-91	9,6	1,7	C	837	2855	4392
10MAC0600119515	600	1195	15	1285	575	56-76	71-91	12,0	2,1	C	1046	3568	5490

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Sections Depth
28 mm

Radiator width for made to order size (mm)
 $((n \times 80) - 5)$ mm



Guarantee
5 years



Max. Working Temperature
95°C



Sections Width
75 mm



Pipe Centre
(W+90) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
10ELT1800029504	1800	295	4	385	1775	60-80	80-100	8,0	1,3	C	624	2126	3272
10ELT1800037005	1800	370	5	460	1775	60-80	80-100	9,8	1,7	C	780	2658	4089
10ELT1800044506	1800	445	6	535	1775	60-80	80-100	11,5	2,0	C	935	3190	4907
10ELT0600059508	600	595	8	685	575	60-80	80-100	6,6	1,0	C	484	1651	2540
10ELT0600074510	600	745	10	835	575	60-80	80-100	8,0	1,2	C	605	2063	3174
10ELT0600089512	600	895	12	985	575	60-80	80-100	9,4	1,5	C	726	2476	3809
10ELT0600104514	600	1045	14	1135	575	60-80	80-100	10,8	1,7	C	847	2889	4444
10ELT0600119516	600	1195	16	1285	575	60-80	80-100	12,2	2,0	C	968	3301	5079

A full range of made to order size available.

Material **Aluminium**

Max. Working Pressure **10 bar**

Connections **1/2"**

Sections Depth **35 mm**

Radiator width for made to order size (mm)
((n × 75) - 5) mm

Guarantee **5 years**

Max. Working Temperature **95°C**

Sections Width **70 mm**

Pipe Centre **(W+90) mm**








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16TAL0780050003	780	500	3	50	80-95	110-125	8,4	3,6	C	235	801	1232
16TAL1040050004	1040	500	4	50	80-95	110-125	10,9	4,6	C	313	1068	1643
16TAL1300050005	1300	500	5	50	80-95	110-125	13,4	5,8	C	392	1335	2054


A full range of made to order size available.

 Material
Stainless Steel

 Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16PAR0900050004	900	500	4	50	80-95	110-125	7,1	6,4	C	312	1063	1635
16PAR1200050006	1200	500	6	50	80-95	110-125	8,2	7,9	C	416	1418	2181
16PAR1500050008	1500	500	8	50	80-95	110-125	9,3	9,6	C	521	1777	2733

A full range of made to order size available.



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar




Max. Working Temperature
95°C



Connections
1/2"



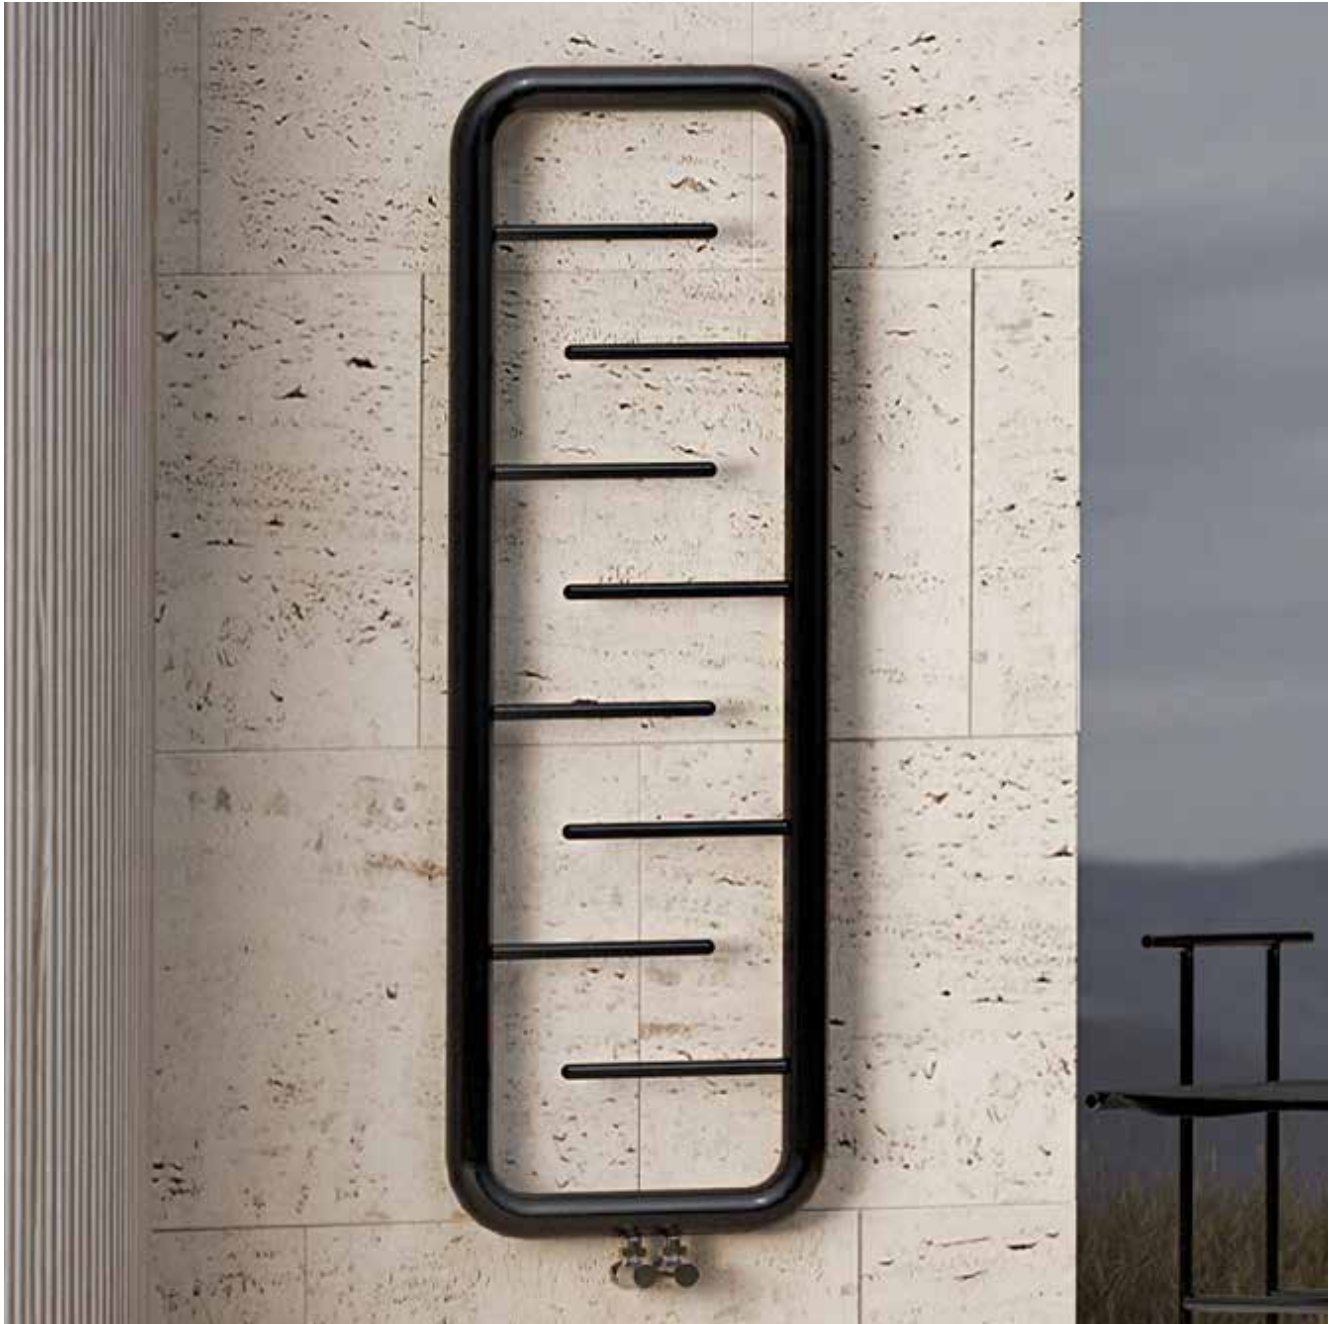




Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16ARE0900050004	900	500	4	50	80-95	110-125	7,5	6,4	C	305	1039	1598
16ARE1200050006	1200	500	6	50	80-95	110-125	9,0	7,9	C	410	1398	2150
16ARE1500050008	1500	500	8	50	80-95	110-125	10,5	9,6	C	505	1722	2650


A full range of made to order size available.

 Material
Stainless Steel

 **Guarantee Terms**
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16BAR0500050001	500	500	1	50	80-95	110-125	4,3	3,2	C	223	760	1169
16BAR1000050002	1000	500	2	50	80-95	110-125	8,7	6,5	C	449	1530	2355
16BAR1500050003	1500	500	3	50	80-95	110-125	13	10	C	678	2311	3556

A full range of made to order size available.



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar



Max. Working Temperature
95°C




Connections
1/2"








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16PAN1100074015	1100	740	15	-	980	60-75	148-163	20,1	20,3	C	601	2050	3154

 Material
Stainless Steel

 Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16SWI0250100001	250	1000	1	50	74-89	158-173	6,0	2,1	C	321	1094	1683

A full range of made to order size available.



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar



Max. Working Temperature
95°C



Connections
1/2"








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16IVO1000050007	1000	500	7	50	60-75	123-138	6,8	5,3	D	315	1073	1650
16IVO1500050011	1500	500	11	50	60-75	123-138	10,7	8,3	D	435	1482	2281


A full range of made to order size available.

 Material
Stainless Steel

 Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16VIV1000050007	1000	500	7	50	60-75	123-138	6,8	5,3	D	237	806	1241
16VIV1500050011	1500	500	11	50	60-75	123-138	10,7	8,3	D	357	1216	1870

A full range of made to order size available.



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar



Max. Working Temperature
95°C



Connections
1/2"








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16BCK0920045004	920	450	4	50	60-75	85-100	6,8	3,2	C	195	665	1023
16BCK1400045006	1400	450	6	50	60-75	85-100	10,2	4,8	C	292	996	1532


A full range of made to order size available.

 Material
Stainless Steel

 Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16CLS0920045004	920	450	4	50	60-75	85-100	5,7	4,6	C	190	648	997

A full range of made to order size available.



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar



Max. Working Temperature
95°C



Connections
1/2"








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16GLB0800050005	800	500	5	468	65-80	81-96	3,2	1,9	D	164	560	861
16GLB1200050007	1200	500	7	468	65-80	81-96	4,7	2,8	D	230	784	1207
16GLB1800050009	1800	500	9	468	65-80	81-96	6,6	4,0	D	296	1009	1553


A full range of made to order size available.


 Material
Stainless Steel

 **Guarantee Terms**
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"

 Pipe Centre
(W-32) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16QDT0800050005	800	500	5	470	60-75	75-90	4,6	2,3	D	148	505	777
16QDT1200050007	1200	500	7	470	60-75	75-90	6,6	3,4	D	208	709	1091
16QDT1800050009	1800	500	9	470	60-75	75-90	9,2	4,8	D	267	911	1402

A full range of made to order size available.



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar



Max. Working Temperature
95°C



Connections
1/2"



Pipe Centre
(W-30) mm








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16GRC0800050005	800	500	5	50	60-75	85-100	4,9	2,4	D	168	574	883
16GRC1200050007	1200	500	7	50	60-75	85-100	7,1	3,6	D	236	805	1238
16GRC1800050009	1800	500	9	50	60-75	85-100	9,8	5,0	D	304	1035	1592


A full range of made to order size available.

 Material
Stainless Steel

 Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces

 Max. Working Pressure
10 bar

 Max. Working Temperature
95°C

 Connections
1/2"





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16ELG0800050005	800	500	5	50	60-75	102-117	5,0	3,5	D	253	861	1325
16ELG1200050007	1200	500	7	50	60-75	102-117	7,2	5,0	D	354	1207	1857
16ELG1800050009	1800	500	9	50	60-75	102-117	9,9	6,8	D	455	1553	2389

A full range of made to order size available.



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar



Max. Working Temperature
95°C



Connections
1/2"





Heating element use available

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
16ECL0880050003	880	500	3	460	65-80	85-100	6,6	5,1	D	231	786	1210
16ECL1370050006	1370	500	6	460	65-80	85-100	18,3	13,9	D	347	1181	1817

A full range of made to order size available.



Material
Stainless Steel



Guarantee Terms
20 years - Brushed and Polished Surfaces
5 years - Paint Surfaces
2 years - PVD Coated Surfaces



Max. Working Pressure
10 bar



Max. Working Temperature
95°C



Connections
1/2"









Pipe Centre
(W-40) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15AJA0450060001	450	600	1	425	79-99	120-140	3,1	0,6	C	124	422	650
15AJA0450060002	450	600	2	425	79-99	120-140	3,5	0,7	C	155	528	812

A full range of made to order size available.

-  Material **Aluminium**
-  Max. Working Pressure **10 bar**
-  Connections **1/2"**
-  Guarantee **5 years**
-  Max. Working Temperature **95°C**
-  Pipe Centre **(W-175) mm**





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15ALB0810050005	810	500	5	475	72-92	95-115	4,7	0,9	D	307	1046	1609
15ALB1180050007	1180	500	7	475	72-92	95-115	6,6	1,3	D	429	1464	2252
15ALB1550050009	1550	500	9	475	72-92	95-115	8,5	1,6	D	552	1882	2896
15ALB1920050011	1920	500	11	475	72-92	95-115	10,3	2,0	D	675	2300	3539

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
5 years



Max. Working Temperature
95°C



Pipe Centre
(W-25) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15NIB0810050005	810	500	5	475	72-92	95-115	4,7	0,9	D	268	915	1407
15NIB1180050007	1180	500	7	475	72-92	95-115	6,6	1,3	D	376	1281	1970
15NIB1550050009	1550	500	9	475	72-92	95-115	8,5	1,6	D	483	1647	2533
15NIB1920050011	1920	500	11	475	72-92	95-115	10,3	2,0	D	590	2012	3096

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
5 years



Max. Working Temperature
95°C



Pipe Centre
(W-25) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15MCB0700050006	700	500	6	475	79-99	93-113	7,8	0,9	D	292	996	1532
15MCB1145050009	1145	500	9	475	79-99	93-113	12,0	1,3	D	438	1494	2298
15MCB1590050012	1590	500	12	475	79-99	93-113	16,2	1,8	D	584	1992	3064
15MCB2035050015	2035	500	15	475	79-99	93-113	20,4	2,2	D	730	2489	3830

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
5 years



Max. Working Temperature
95°C



Pipe Centre
(W-25) mm








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15MBH0505150004	505	1500	4	1475	79-99	93-113	7,8	0,9	C	668	2276	3502
15MBH0505180004	505	1800	4	1775	79-99	93-113	12,0	1,3	C	801	2733	4205


A full range of made to order size available.


 Material
Aluminium

 Max. Working Pressure
10 bar

 Connections
1/2"

 Guarantee
5 years

 Max. Working Temperature
95°C

 Pipe Centre
(W-25) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15PBH0700049008	700	490	8	455	56-76	82-102	5,1	1,2	D	326	1111	1709
15PBH1190049013	1190	490	13	455	56-76	82-102	8,2	2,0	D	529	1805	2777
15PBH1680049018	1680	490	18	455	56-76	82-102	11,2	2,8	D	733	2500	3845

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
5 years



Max. Working Temperature
95°C



Pipe Centre
(W-35) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15PDB0700049008	700	490	8	455	56-76	82-102	6,8	1,2	D	355	1209	1861
15PDB1190049013	1190	490	13	455	56-76	82-102	10,9	2,0	D	576	1965	3024
15PDB1680049018	1680	490	18	455	56-76	82-102	15,1	2,8	D	798	2721	4186

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
5 years



Max. Working Temperature
95°C



Pipe Centre
(W-35) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15FME0700050010	700	500	10	475	79-99	93-113	4,3	1,3	D	411	1400	2155
15FME1220050015	1220	500	15	475	79-99	93-113	7,1	1,9	D	616	2101	3232
15FME1460050019	1460	500	19	475	79-99	93-113	8,7	2,4	D	780	2661	4094
15FME1740050022	1740	500	22	475	79-99	93-113	10,2	2,9	D	904	3081	4740

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
5 years



Max. Working Temperature
95°C



Pipe Centre
(W-25) mm








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15FMH0400100006	400	1000	6	975	79-99	93-113	5,1	1,5	C	299	1020	1570


A full range of made to order size available.


 Material **Aluminium**

 Max. Working Pressure **10 bar**

 Connections **1/2"**

 Guarantee **5 years**

 Max. Working Temperature **95°C**

 Pipe Centre **(W-25) mm**





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15FRM0740050008	740	500	8	475	79-99	93-113	3,9	1,1	D	329	1120	1724
15FRM1008050011	1008	500	11	475	79-99	93-113	6,7	1,6	D	452	1541	2370
15FRM1276050014	1276	500	14	475	79-99	93-113	7,2	2,1	D	575	1961	3016
15FRM1544050017	1544	500	17	475	79-99	93-113	8,4	2,7	D	698	2381	3663
15FRM1812050020	1812	500	20	475	79-99	93-113	9,6	3,2	D	821	2801	4309

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
5 years




Max. Working Temperature
95°C



Pipe Centre
(W-25) mm



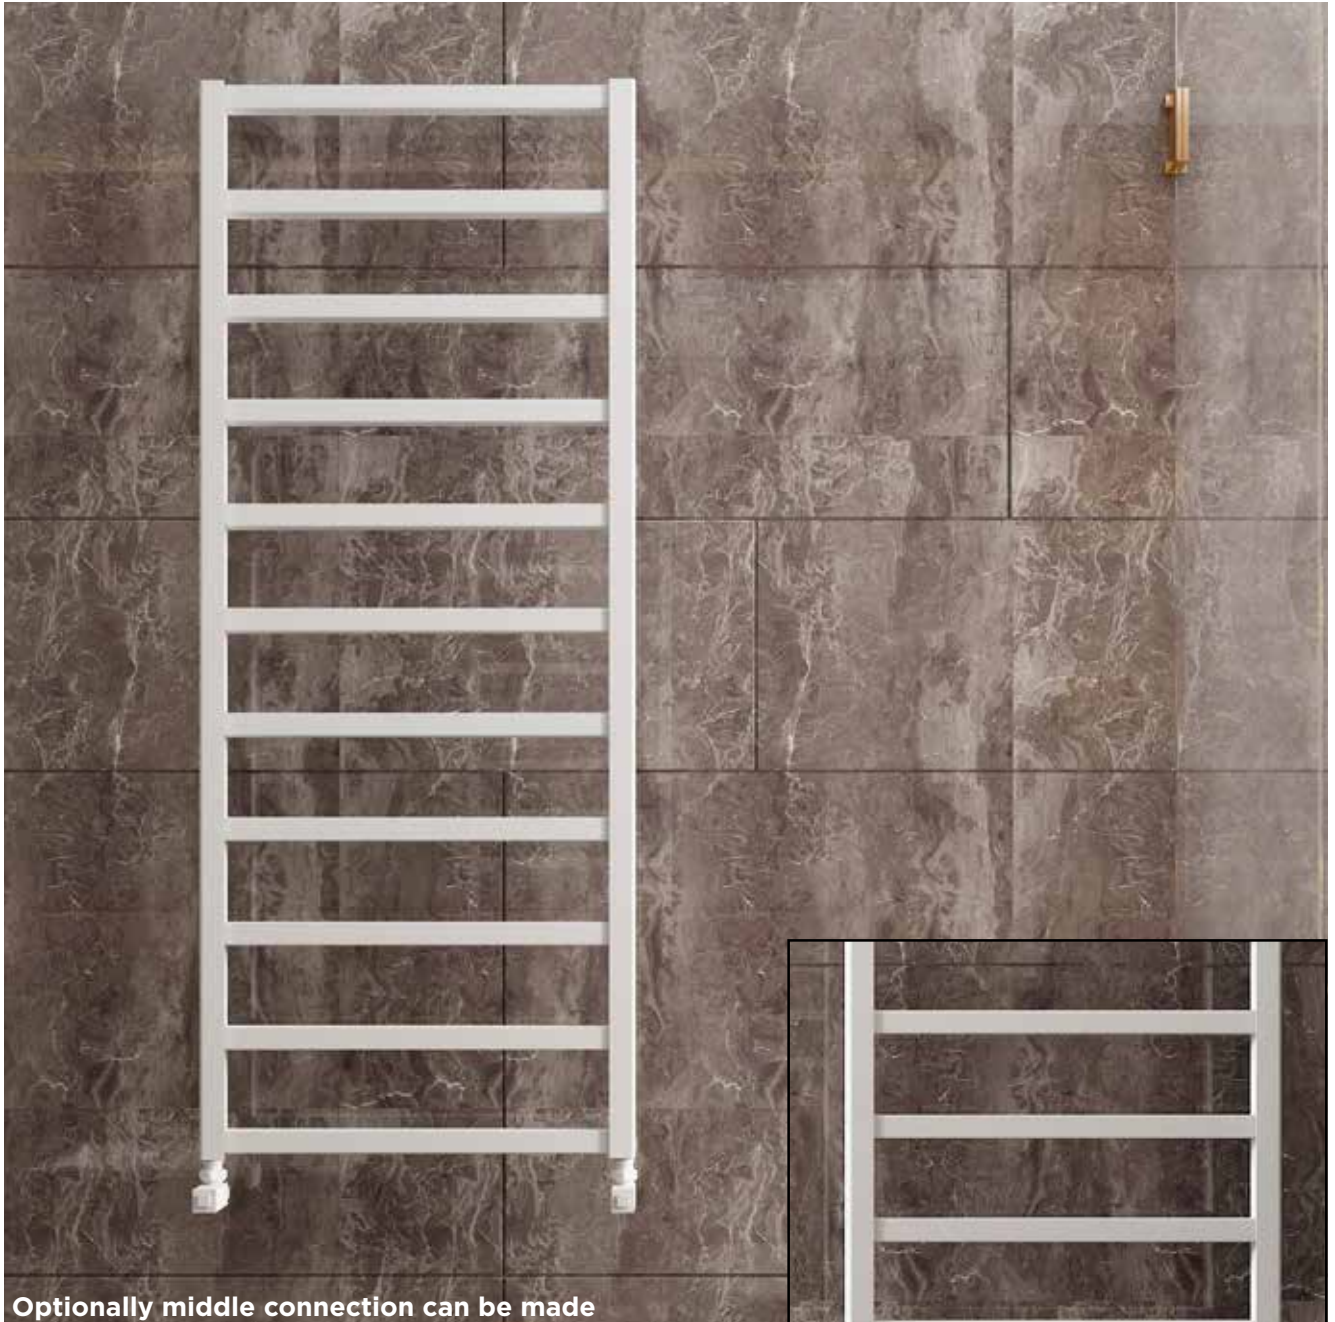

Optionally middle connection can be made

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15BRT0760048007	760	480	7	50-455	79-99	93-113	3,4	1,3	D	371	1263	1944
15BRT1240048011	1240	480	11	50-455	79-99	93-113	6,9	1,8	D	649	2212	3403
15BRT1600048014	1600	480	14	50-455	79-99	93-113	7,4	2,3	D	742	2531	3894

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
5 years



Max. Working Temperature
95°C



Pipe Centre
(W-25) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15BRL0800050008	800	500	8	400	50-70	92-112	5,2	1,1	D	284	968	1490
15BRL1200050012	1200	500	12	400	50-70	92-112	7,9	1,7	D	426	1451	2233
15BRL1600050016	1600	500	16	400	50-70	92-112	10,5	2,3	D	568	1937	2980


A full range of made to order size available.



Max. Working Pressure
10 bar



Connections
1/2"




Max. Working Temperature
95°C



Pipe Centre
(W-100) mm



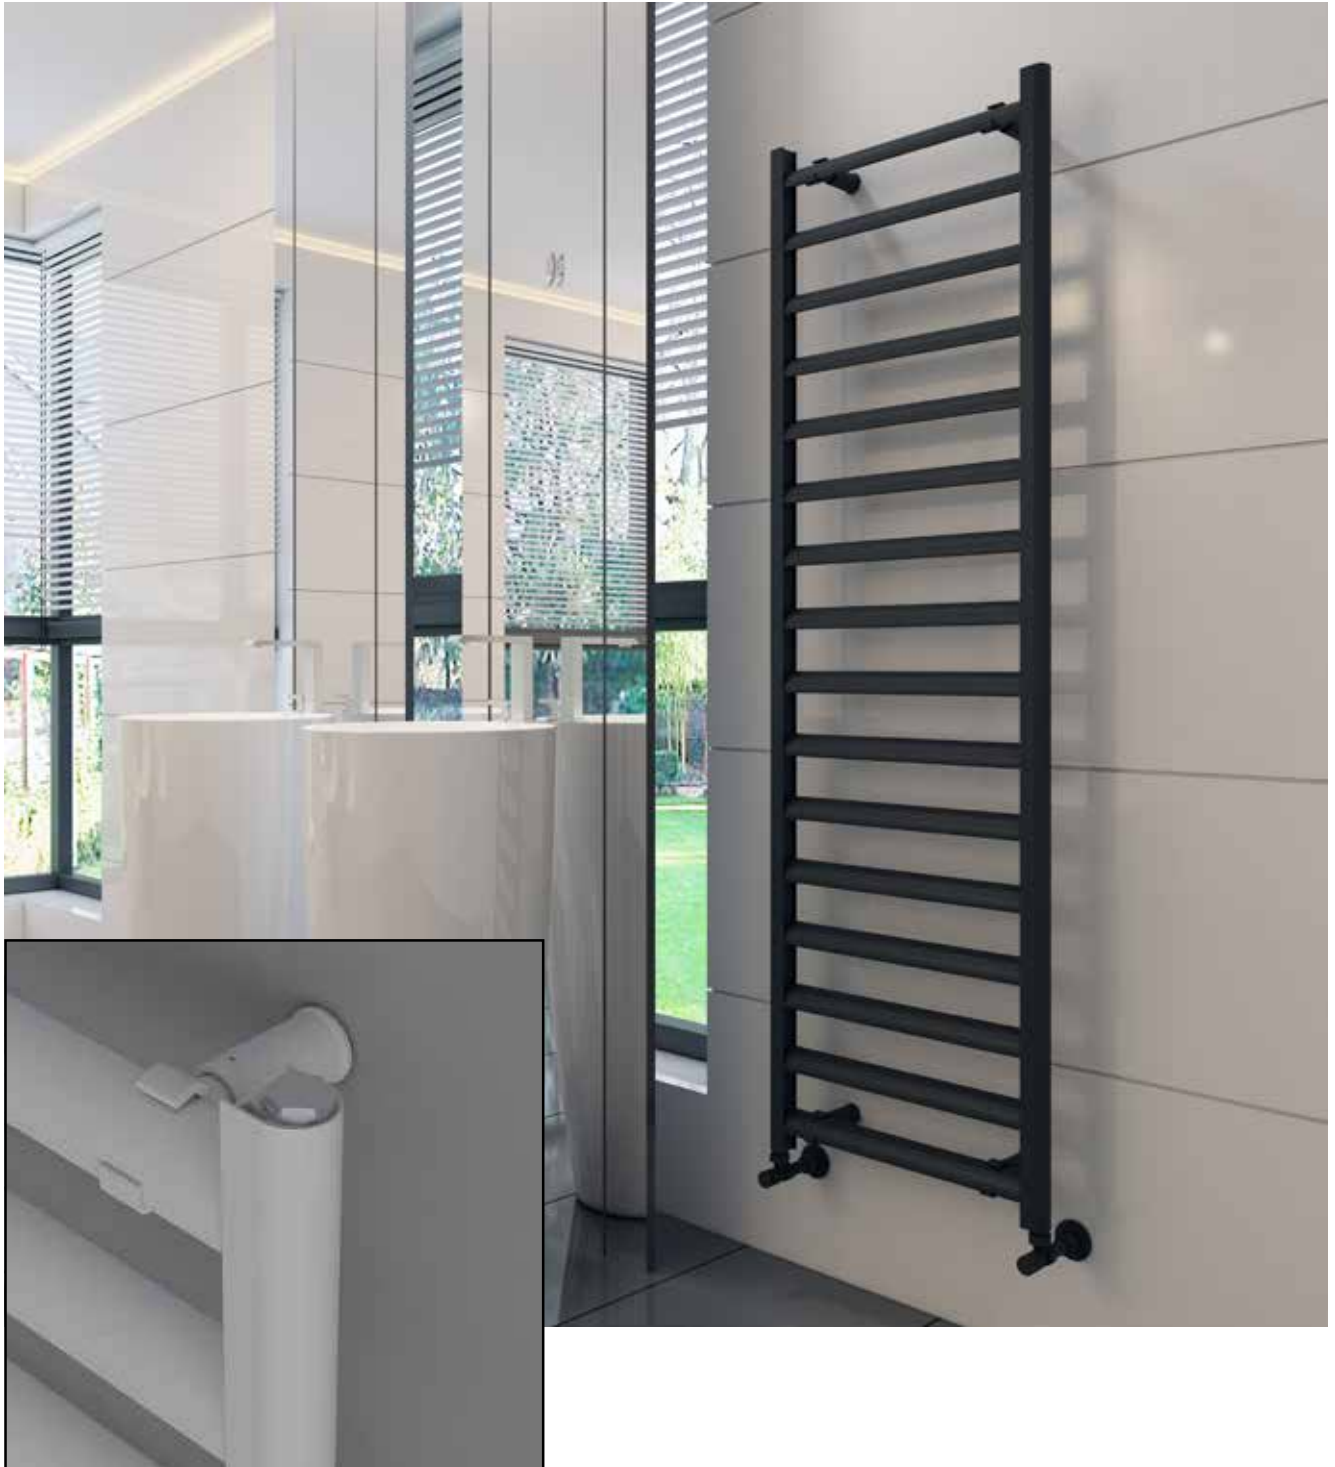

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15LRL0800048508	800	485	8	455	90-110	107-122	4,0	0,8	D	244	832	1280
15LRL1200048512	1200	485	12	455	90-110	107-122	6,1	1,2	D	366	1248	1920
15LRL1600048516	1600	485	16	455	90-110	107-122	8,1	1,6	D	488	1664	2560

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
5 years



Max. Working Temperature
95°C



Pipe Centre
(W-30) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15SEL0805048008	805	480	8	455	89-109	101-121	3,2	0,7	D	299	1018	1566
15SEL1015048010	1015	480	10	455	89-109	101-121	4,0	0,9	D	373	1272	1957
15SEL1225048012	1225	480	12	455	89-109	101-121	4,7	1,1	D	448	1527	2349
15SEL1435048014	1435	480	14	455	89-109	101-121	5,4	1,3	D	522	1781	2740
15SEL1645048016	1645	480	16	455	89-109	101-121	6,2	1,5	D	597	2036	3132

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
5 years




Max. Working Temperature
95°C



Pipe Centre
(W-25) mm



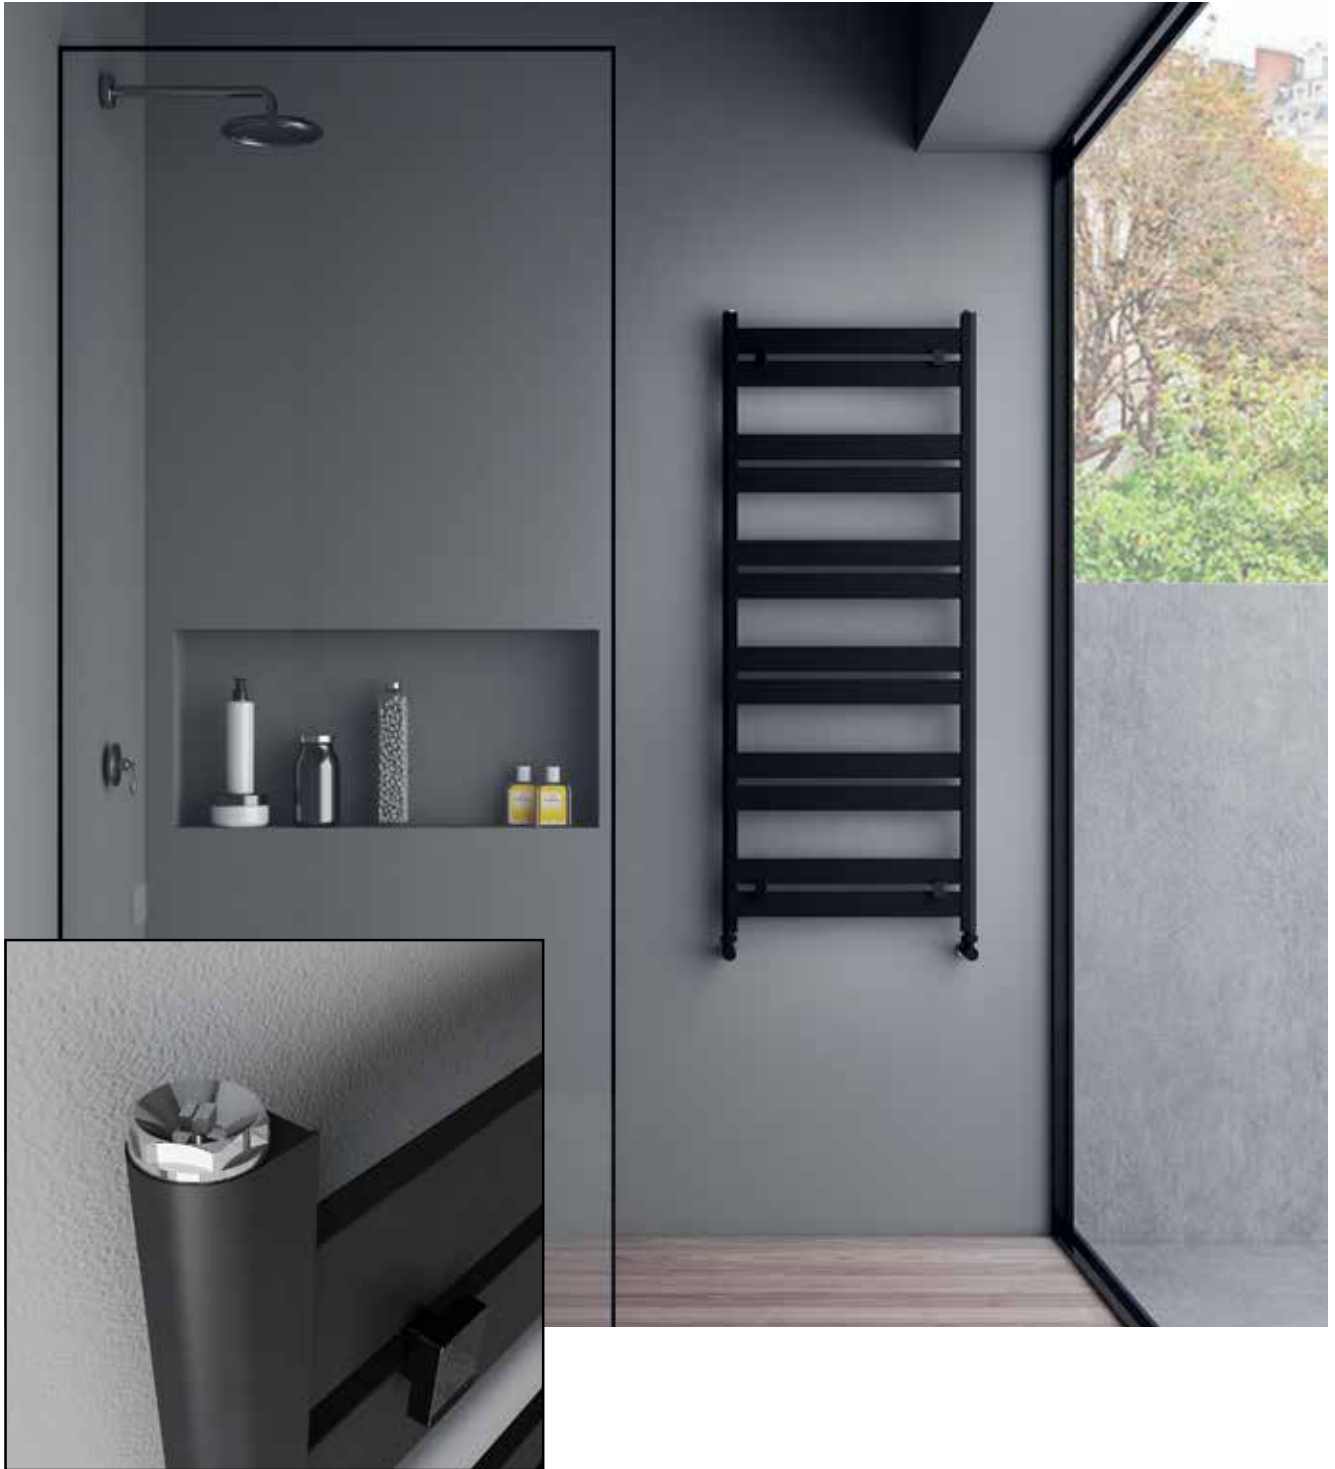

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15LIG0805048008	805	480	8	455	89-109	101-121	3,5	0,7	D	304	1037	1596
15LIG1015048010	1015	480	10	455	89-109	101-121	4,1	0,9	D	381	1299	2001
15LIG1225048012	1225	480	12	455	89-109	101-121	4,9	1,1	D	459	1565	2410
15LIG1435048014	1435	480	14	455	89-109	101-121	5,7	1,3	D	537	1831	2820
15LIG1645048016	1645	480	16	455	89-109	101-121	6,5	1,5	D	616	2101	3235

A full range of made to order size available.



Material
Aluminium



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
5 years



Max. Working Temperature
95°C



Pipe Centre
(W-25) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
15SOH0715050006	715	500	6	475	78-93	93-108	3,9	0,9	D	256	873	1343
15SOH1225050011	1225	500	11	475	78-93	93-108	6,7	1,7	D	469	1601	2463
15SOH1480050013	1480	500	13	475	78-93	93-108	7,9	2,0	D	555	1892	2911
15SOH1735050015	1735	500	15	475	78-93	93-108	9,2	2,3	D	640	2183	3358


A full range of made to order size available.



Max. Working Pressure
10 bar



Connections
1/2"



Max. Working Temperature
95°C



Pipe Centre
(W-25) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
12MYR1800027004	1800	270	4	360	1720	65-85	135-155	12,2	10,3	C	1053	3592	5526
12MYR1800042006	1800	420	6	510	1720	65-85	135-155	18,3	15,5	C	1506	5137	7903
12MYR0550072010	550	720	10	810	470	65-85	135-155	10,5	8,7	C	833	2839	4368
12MYR0550102014	550	1020	14	1110	470	65-85	135-155	14,7	12,3	C	1168	3983	6128

A full range of made to order size available.



Material
Steel



Max. Working Pressure
10 bar



Connections
1/2"



Pipe Centre
(W+90) mm



Guarantee
3 years



Max. Working Temperature
95°C



Sections Width
45 mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
12ZAR1800026005	1800	260	5	350	1720	25-45	80-100	9,7	6,9	C	702	2392	3681
12ZAR1800036007	1800	360	7	450	1720	25-45	80-100	12,0	9,7	C	982	3349	5153
12ZAR0550063510	550	635	10	725	470	25-45	80-100	7,5	4,5	C	429	1463	2251
12ZAR0550083013	550	830	13	920	470	25-45	80-100	9,7	6,1	C	557	1900	2922
12ZAR0550102516	550	1025	16	1115	470	25-45	80-100	12,0	7,4	C	686	2341	3601

A full range of made to order size available.



Material
Steel



Max. Working Pressure
10 bar



Connections
1/2"



Pipe Centre
(W+90) mm



Guarantee
3 years



Max. Working Temperature
95°C



Sections Width
30 mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
17EDW0950065008	950	650	8	415	141	165	6,0	C	290	989	1521



Material
Steel



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
3 years




Max. Working Temperature
95°C








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
17VCT0950050005	950	500	5	265	141	165	3,4	C	161	549	844
17VCT1340050007	1340	500	7	265	141	165	6,0	C	282	960	1478

 Material
Steel

 Max. Working Pressure
10 bar

 Connections
1/2"

 Guarantee
3 years

 Max. Working Temperature
95°C





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
17VTG0650065003	650	650	3	575	141	165	3,7	C	177	605	931
17VTG0800065008	800	650	8	575	141	165	6,1	C	306	1042	1603



Material
Steel



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
3 years



Max. Working Temperature
95°C





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
17ALD0800050006	800	500	6	440	66-86	107-127	7,5	C	338	1154	1775
17ALD1200050009	1200	500	9	440	66-86	107-127	9,7	C	508	1731	2663
17ALD1600050012	1600	500	12	440	66-86	107-127	12,0	C	677	2308	3551

Material
SteelMax. Working Pressure
10 barConnections
1/2"Guarantee
3 yearsMax. Working Temperature
95°CPipe Centre
(W-60) mm



Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
17ETG0350050005	350	500	5	470	65-85	280-300	3,0	C	150	510	784



Material
Steel



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
3 years



Max. Working Temperature
95°C



Pipe Centre
(W-30) mm





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
17FLR0800050006	800	500	6	100	65-85	100-120	5,3	C	289	985	1516
17FLR1000050008	1000	500	8	100	65-85	100-120	6,9	C	382	1302	2003
17FLR1200050010	1200	500	10	100	65-85	100-120	8,5	C	482	1643	2528



Material
Steel



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
3 years



Max. Working Temperature
95°C





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
17NIL0800040012	800	400	12	355	70-90	85-105	6,6	D	277	943	1451
17NIL1200040018	1200	400	18	355	70-90	85-105	8,9	D	397	1355	2084
17NIL1600040024	1600	400	24	355	70-90	85-105	11,6	D	524	1787	2750
17NIL0800050012	800	500	12	455	70-90	85-105	7,6	D	327	1115	1716
17NIL1200050018	1200	500	18	455	70-90	85-105	10,2	D	468	1597	2457
17NIL1600050024	1600	500	24	455	70-90	85-105	12,9	D	618	2107	3242
17NIL0800060012	800	600	12	555	70-90	85-105	8,6	D	379	1291	1986
17NIL1200060018	1200	600	18	555	70-90	85-105	13,8	D	543	1851	2847
17NIL1600060024	1600	600	24	555	70-90	85-105	14,1	D	717	2445	3762

A full range of made to order size available.



Material
Steel



Max. Working Pressure
10 bar



Connections
1/2"



Guarantee
3 years



Max. Working Temperature
95°C



Pipe Centre
(W-45) mm





ULTRA SLIM

COLLECTION




COVENTRY	218
CROYDON	219
DUBLIN	220
GLASGOW	221
HAMLETS	222
LYMM	223
MANCHESTER	224
PLYMOUTH	225
REX	226
STIRLING	227
ROCHESTER	228-229

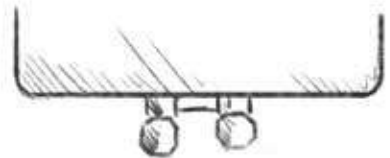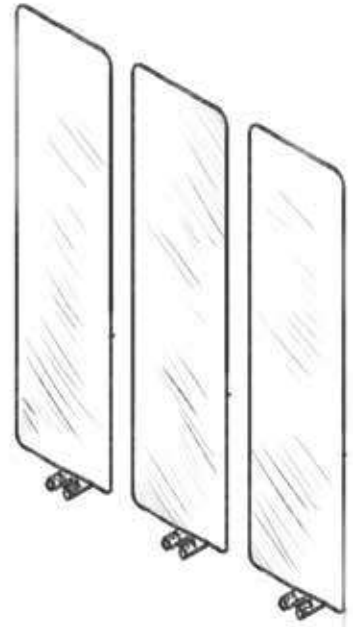






Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
13COV0470047000	470	470	50	31-51	61-81	6,5	0,4	C	217	739	1137
13CVR0470047000	470	470	50	31-51	61-81	6,5	0,4	C	217	739	1137

 Material
Steel

 Max. Working Pressure
2 bar

 Connections
1/2"

 Guarantee
3 years

 Max. Working Temperature
95°C





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
13CRO0790029000	790	290	50	31-51	61-81	7,1	0,4	C	237	807	1242
13CRO0990029000	990	290	50	31-51	61-81	9,0	0,5	C	300	1023	1574
13CRO1190029000	1190	290	50	31-51	61-81	10,7	0,6	C	357	1216	1871
13CRO1790029000	1790	290	50	31-51	61-81	16,1	0,9	C	536	1829	2815



Material
Steel



Max. Working Pressure
2 bar



Connections
1/2"



Guarantee
3 years




Max. Working Temperature
95°C








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
13DUB0450045000	450	450	50	31-51	61-81	5,5	0,3	C	183	625	962
13DUB1470045000	1470	450	50	31-51	61-81	19,0	1,1	C	633	2160	3323
13DUB1790045000	1790	450	50	31-51	61-81	22,6	1,3	C	753	2569	3952

 Material
Steel

 Max. Working Pressure
2 bar

 Connections
1/2"

 Guarantee
3 years


 Max. Working Temperature
95°C








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
13GLA1190040000	1190	400	50	31-51	61-81	10,7	0,6	C	357	1216	1871

 Material
Steel

 Max. Working Pressure
2 bar

 Connections
1/2"

 Guarantee
3 years


 Max. Working Temperature
95°C








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
13HAM0990035300	990	353	50	31-51	61-81	9,8	0,6	C	327	1114	1714
13HAM1190035300	1190	353	50	31-51	61-81	11,8	0,7	C	393	1341	2063

 Material
Steel

 Max. Working Pressure
2 bar

 Connections
1/2"

 Guarantee
3 years


 Max. Working Temperature
95°C








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
13LYM1790047000	1790	470	50	31-51	61-81	24,5	1,4	C	817	2785	4284

 Material
Steel

 Max. Working Pressure
2 bar

 Connections
1/2"

 Guarantee
3 years


 Max. Working Temperature
95°C








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
13MAN0790047000	790	470	50	31-51	61-81	10,8	0,6	C	360	1228	1889
13MAN1190047000	1190	470	50	31-51	61-81	15,5	0,9	C	517	1762	2711

 Material
Steel

 Max. Working Pressure
2 bar

 Connections
1/2"

 Guarantee
3 years

 Max. Working Temperature
95°C





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Pipe Centres (mm)	Vertical Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
13PLM1790047000	1790	470	50	-	31-51	61-81	23,8	1,4	C	793	2705	4162



Material
Steel



Max. Working Pressure
2 bar



Connections
1/2"



Guarantee
3 years




Max. Working Temperature
95°C








Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
13REX0940049000	940	490	50	31-51	61-81	11,0	0,6	C	409	1394	2144
13REX1200049000	1200	490	50	31-51	61-81	13,9	0,8	C	522	1779	2737
13REX1720049000	1720	490	50	31-51	61-81	19,6	1,1	C	748	2550	3923

 Material
Steel

 Max. Working Pressure
2 bar

 Connections
1/2"

 Guarantee
3 years

 Max. Working Temperature
95°C





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
13STI0800050000	800	500	50	31-51	61-81	11,0	0,6	C	367	1250	1924
13STI1030050000	1030	500	50	31-51	61-81	14,5	0,8	C	483	1648	2536



Material
Steel



Max. Working Pressure
2 bar



Connections
1/2"



Guarantee
3 years



Max. Working Temperature
95°C







Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70
13ROC0470047000	470	470	50	31-51	61-81	3,5	0,2	C	179	611	940
13ROC0870047000	870	470	50	31-51	61-81	6,8	0,4	C	328	1117	1719
13ROC1270047000	1270	470	50	31-51	61-81	10,1	0,6	C	493	1680	2585



Material
Steel



Max. Working Pressure
2 bar



Connections
1/2"




Guarantee
3 years




Max. Working Temperature
95°C



ELECTRIC COLLECTION

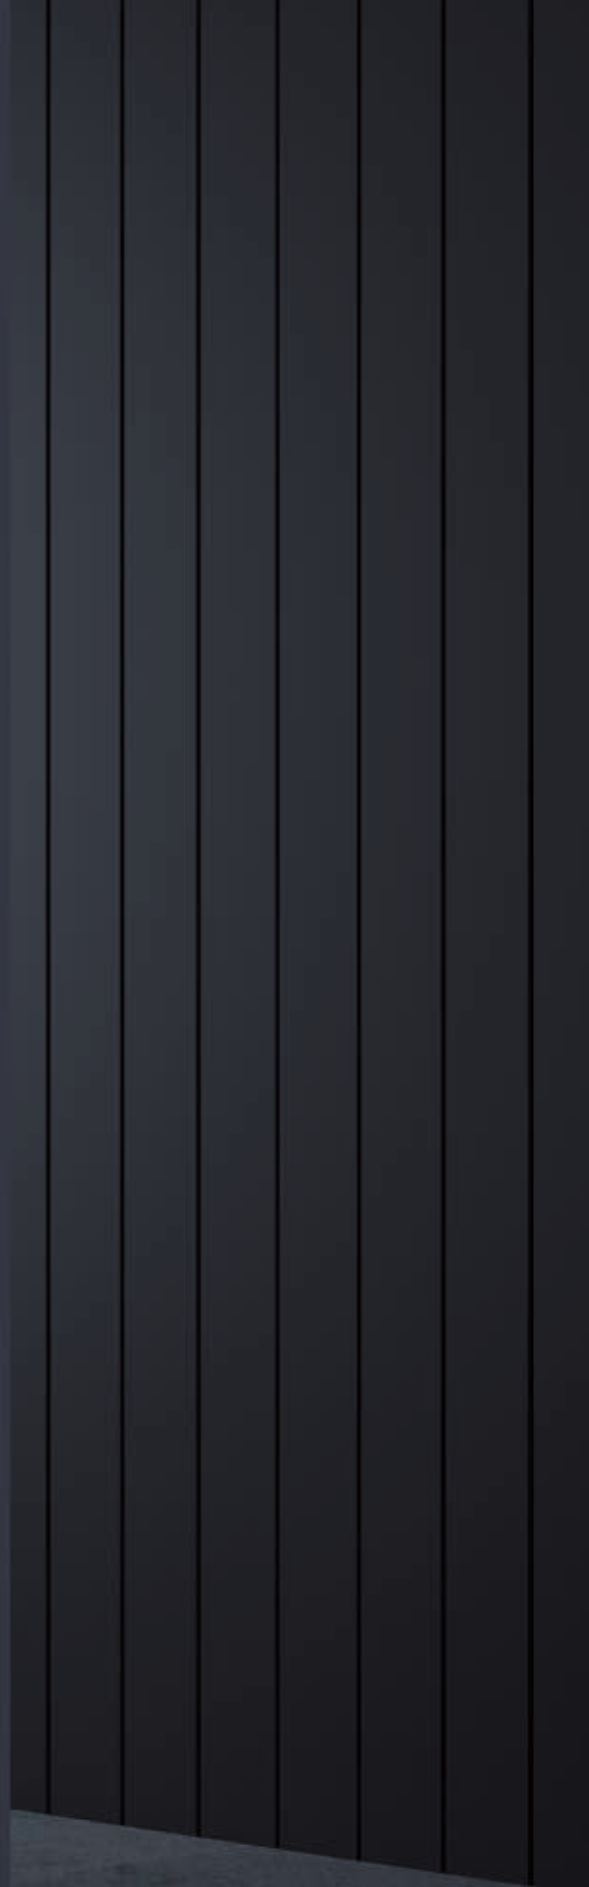

BOREAS N	234-235
BOREAS N MIRROR	236-237
BOREAS HYBRID N	238-239
BOREAS B	240-241
BOREAS B MIRROR	242-243
BOREAS HYBRID B	244-245
BOREAS S	246-247
BOREAS S MIRROR	248-249
BOREAS HYBRID S	250-251
BOREAS M	252-253
BOREAS HYBRID M	254-255
BOREAS FLAT	256-257
BOREAS FLAT TOWEL HOLDER	258-259
BOREAS FLAT MIRROR	260-261
BOREAS NOTUS V	262-263
BOREAS NOTUS Z	264-265
BOREAS NOTUS S	266-267
OTTO S	268
VESTA S	269
MAXIM	270
DANTE	271
FELIX	272
VERO	273
NEO	274

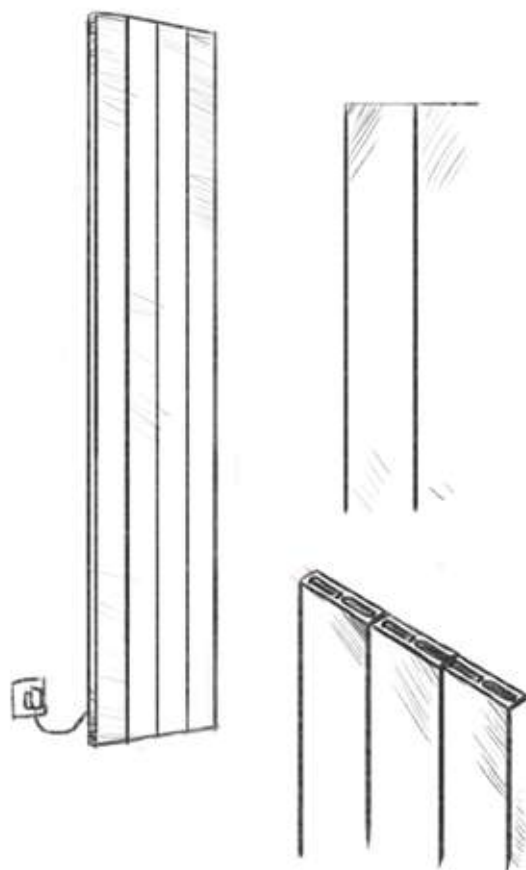



Carisa Electric Radiators

Carisa electric is everything you would expect from such a forward thinking design lead manufacturer. Electric heating is ideal, of course, in areas where there is no plumbing available but the new technologies used today make electric more desirable than ever in any space you require heating!

They are easy to fit, totally controllable, affordable and economical to run. What more do you need?



Carisa Hybrid Electric Radiators

Imagine your home adorned with Carisa hybrid smart Electric radiators. That is the ultimate control. Use them as traditional but high design radiators or bring them to life as an independently controlled electric radiator. Heat only the space you want 365/24/7.

“Electric central heating can offer truly amazing savings over traditional central heating.”

Electric central heating has many benefits over traditional forms of heating, and it's all to do with the radiator technology. It's come a long way since clunky storage heaters and 3-bar electric fires – our electric radiators are super-smart and offer several advantages when it comes to heating your home.

Ecodesign - LOT 20 Compliant



Wifi Controlled

Control Your Heating From Anywhere In The World

Set multi function programmes, adjust temperatures and monitor usage, wherever you are. Simply connect each radiator to the Smart Life app and gain complete control of your heating and importantly your costs from your smartphone or tablet.

Google & Alexa Activated

Adjust your Radiators with Simple Voice Commands

Connect the Smart Life app to your Google Home or Amazon Alexa and use simple voice commands to control each Carisa smart electric radiator in your home – without lifting a finger.



Away From Home Detection

Save Energy When You're Not At Home

Unplanned trip or staying out longer than expected? Heating an empty house? No problem. Our unique geolocation feature detects when you are away from home and automatically adjusts the heating to save you money. Now that's smart electric.



24/7 Programmable

Heat where you want it when you want it

Each Carisa Smart Wifi electric radiator is individually programmable with 24/7 settings. Schedule the heating in each room from your phone, so you avoid heating unused areas and get heat exactly where you want it when you want it. And when life doesn't run to schedule, you can use the simple on/off feature. Now that's smart electric.



Ultra Energy Efficient

Save money on your heating bills this winter

More than just another radiator, Carisa Smart Radiator uses the latest intelligent heat management technology to get the most heat out of every unit of electricity, ensuring maximum cost savings along the way. Our radiators heat up in 2 minutes using self temperature limit sensors to provide stable energy efficient heating source. Open window/door detection sensor prevents unnecessary energy consumption. Now that's smart electric.

The new Carisa electric is available in two options:



Smart Electric:


Our Smart Electric is really smart. Firstly it is compliant with all current legislation in regards to electric heating. Lot 20 and more. Not only can it tell if a window or door is open and make adjustments but it is WiFi enabled too. Control all aspects of these sensational products from the comfort of your own armchair, the office or the beach. They are also fully compatible with Alexa and Google Home, so you can control everything with your voice.

Hybrid Electric:

Arguably smarter than our smart electric. This really is the best of both worlds. Installed like a traditional radiator to the central heating system, then cleverly connect to the electricity supply, nothing too new there you might think but...

Our ceramic plate technology is installed invisibly to the rear of the product and only heats the body of the radiator when your central heating is switched off. Fully controlled temperature and touch temperature. Economical heating all year round.



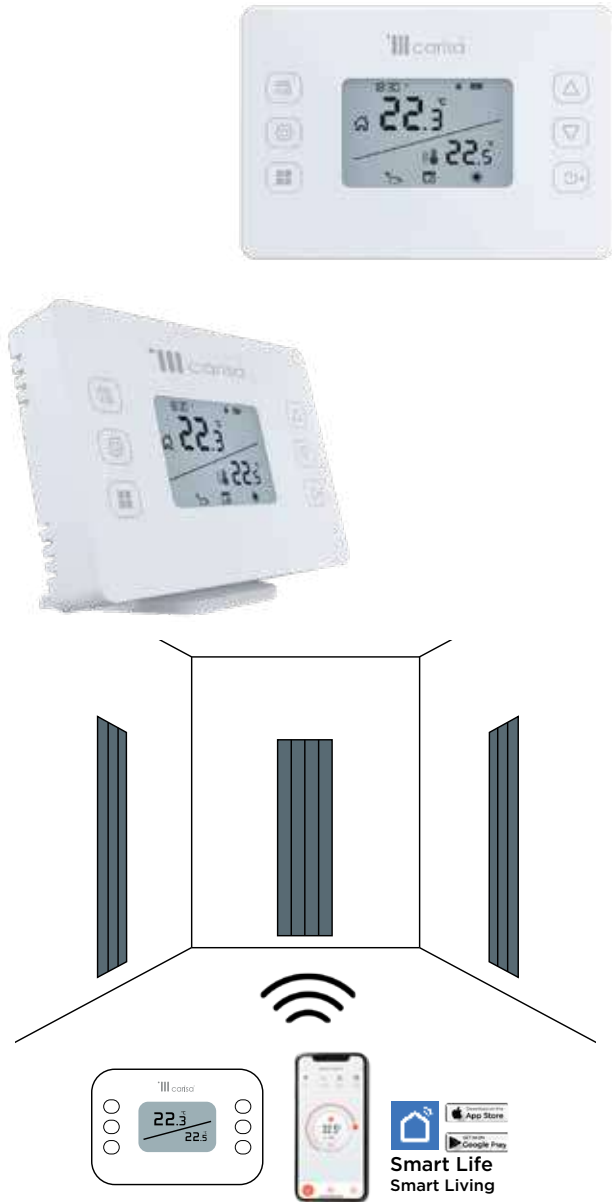

Multiple Radiator Control



- The Boreas radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.
- Boreas Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

The product comes with a paired wifi thermostat.

New Smart Electric Radiators provide below three key features by using mobile apps and wifi thermostat.

1. 24-hour or Timer Control.
2. Thermostatic Control. Accurate room temperature measurement by our wifi electronic digital thermostat.
3. Smart Control, Open door or window recognition Weekly /Daily Programmable technology to automate heating cycles.

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
14NEL1800027603	1800	276	3	93	9,3	E	1500
14NEL1800036904	1800	369	4	93	11,8	E	2000
14NEL1800046205	1800	462	5	93	14,2	E	2500
14NEL1800055506	1800	555	6	93	16,7	E	3000
14NEL1200027603	1200	276	3	93	6,2	E	900
14NEL1200036904	1200	369	4	93	7,8	E	1200
14NEL1200046205	1200	462	5	93	9,4	E	1500
14NEL1200055506	1200	555	6	93	11,1	E	1800
14NEL0600055506	600	555	6	93	6,9	E	1200
14NEL0600074108	600	741	8	93	8,5	E	1600
14NEL0600092710	600	927	10	93	10,1	E	2000
14NEL0600111312	600	1113	12	93	11,7	E	2400
14NEL0600129914	600	1299	14	93	13,3	E	2800

Al Material
Aluminium


↔ Sections Width
90 mm

⚙️ Guarantee
2 years

Radiator width for made to order size (mm)
(n × 93)-3 mm





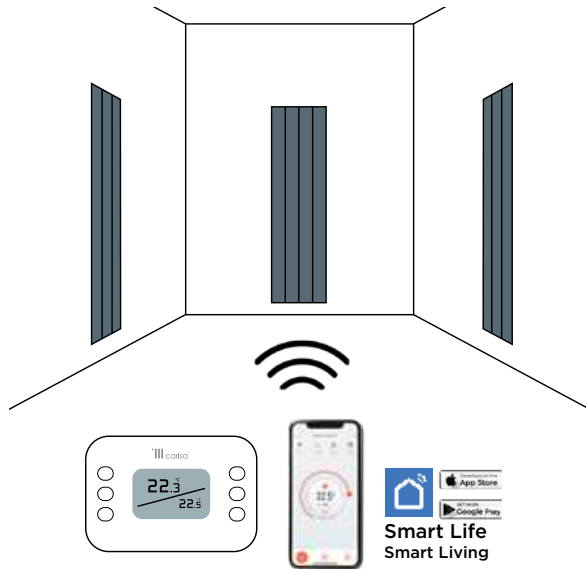

Multiple Radiator Control

➤ The Boreas radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.

➤ Boreas Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

The product comes with a paired wifi thermostat.

New Smart Electric Radiators provide below three key features by using mobile apps and wifi thermostat.

1. 24-hour or Timer Control.
2. Thermostatic Control. Accurate room temperature measurement by our wifi electronic digital thermostat.
3. Smart Control, Open door or window recognition Weekly /Daily Programmable technology to automate heating cycles.

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
14BNM1800036904	1800	369	4	97	15,1	E	2000

Al Material
Aluminium


↔ Sections Width
90 mm

⚙️ Guarantee
2 years

Radiator width for made to order size (mm)
((n × 93)-3) mm





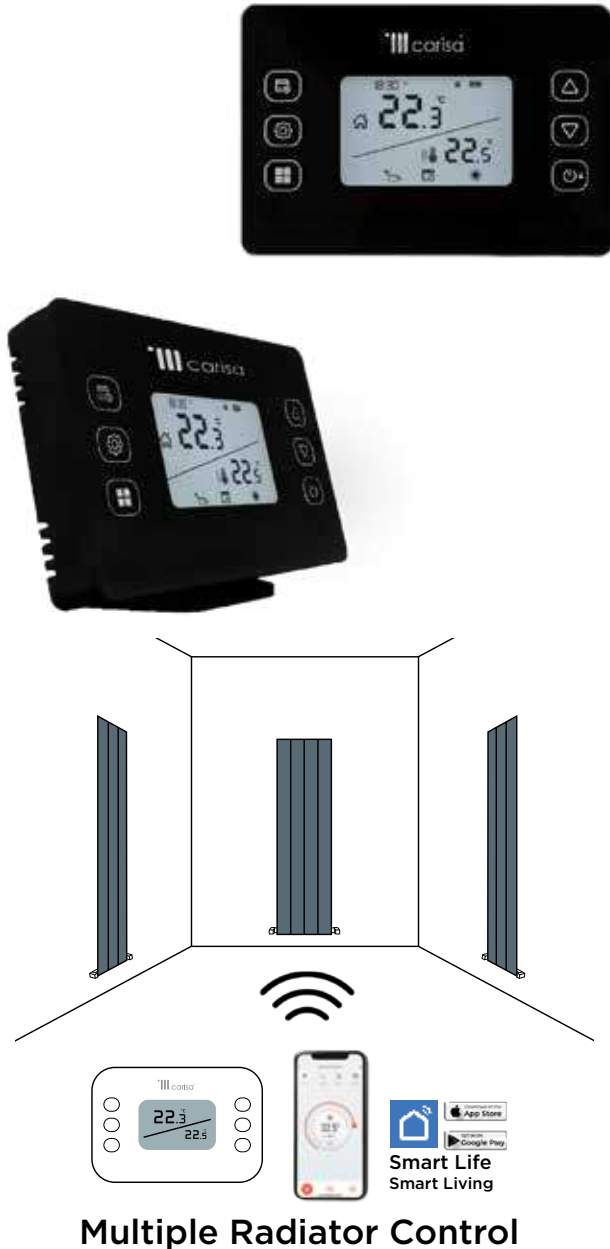

Multiple Radiator Control



- The Boreas radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.
- Boreas Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

The product comes with a paired wifi thermostat.

Boreas Hybrid is a perfect combination of central heating radiators and dry heated electric radiators with a smart Wi-Fi controller. It is integrated into the central heating system when the combi boiler is on during the cold winter period. It is also suitable for use on cold days in spring or autumn with electric heaters. Our hybrid heating technology is the most efficient way for electric heating, as we directly heat the aluminum body of the radiator


New Smart Electric Radiators provide below three key features by using mobile apps and wifi thermostat.

1. 24-hour or Timer Control.
2. Thermostatic Control. Accurate room temperature measurement by our wifi electronic digital thermostat.
3. Smart Control, Open door or window recognition Weekly /Daily Programmable technology to automate heating cycles.

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70	Power (W)
14NHB1800027603	1800	276	3	366	69	104	9,7	1,2	D	878	2992	4604	1500
14NHB1800036904	1800	369	4	459	69	104	13,8	1,6	D	1170	3990	6138	2000
14NHB1800046205	1800	462	5	552	69	104	17,9	2,0	D	1463	4987	7673	2500
14NHB1800055506	1800	555	6	645	69	104	22,0	2,4	D	1755	5985	9207	3000

Material Aluminium	Max. Working Pressure 10 bar	Connections 1/2"	Pipe Centre (W+90) mm	
Guarantee 2 years	Max. Working Temperature 95°C	Sections Width 90 mm	Radiator width for made to order size (mm) ((n × 93)-3) mm	
EPD READY	IPX4	Low Voltage Directive		



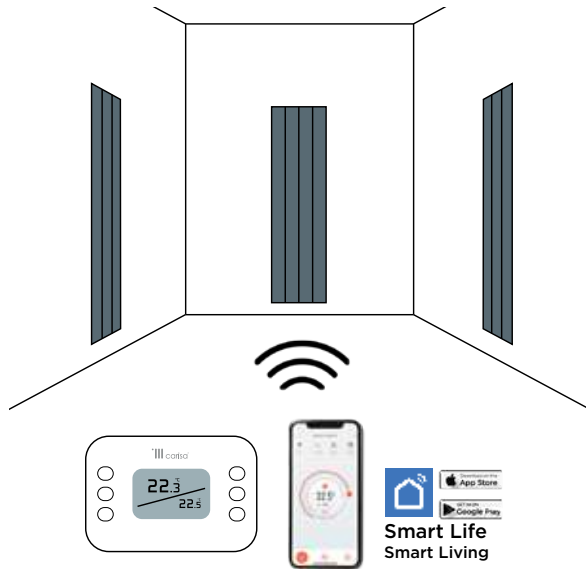

Multiple Radiator Control

- The Boreas radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.
- Boreas Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

The product comes with a paired wifi thermostat.

New Smart Electric Radiators provide below three key features by using mobile apps and wifi thermostat.

1. 24-hour or Timer Control.
2. Thermostatic Control. Accurate room temperature measurement by our wifi electronic digital thermostat.
3. Smart Control, Open door or window recognition Weekly /Daily Programmable technology to automate heating cycles.

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
14BRE1800027603	1800	276	3	111	9,8	E	1500
14BRE1800036904	1800	369	4	111	12,2	E	2000
14BRE1800046205	1800	462	5	111	14,7	E	2500
14BRE1800055506	1800	555	6	111	17,1	E	3000
14BRE1200027603	1200	276	3	111	6,5	E	900
14BRE1200036904	1200	369	4	111	8,1	E	1200
14BRE1200046205	1200	462	5	111	9,8	E	1500
14BRE1200055506	1200	555	6	111	11,4	E	1800
14BRE0600055506	600	555	6	111	7,0	E	1200
14BRE0600074108	600	741	8	111	8,6	E	1600
14BRE0600092710	600	927	10	111	10,3	E	2000
14BRE0600111312	600	1113	12	111	11,9	E	2400
14BRE0600129914	600	1299	14	111	13,5	E	2800

Al Material Aluminium


↔ Sections Width 90 mm

⚙️ Guarantee 2 years

Radiator width for made to order size (mm) ((n × 93)-3) mm





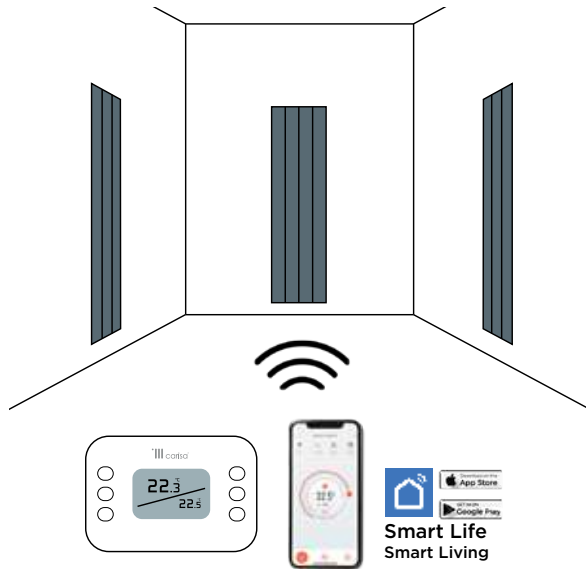

Multiple Radiator Control

➤ The Boreas radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.

➤ Boreas Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

The product comes with a paired wifi thermostat.

New Smart Electric Radiators provide below three key features by using mobile apps and wifi thermostat.

1. 24-hour or Timer Control.
2. Thermostatic Control. Accurate room temperature measurement by our wifi electronic digital thermostat.
3. Smart Control, Open door or window recognition Weekly /Daily Programmable technology to automate heating cycles.

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
14BBM1800036904	1800	369	4	111	15,6	E	2000

Al Material
Aluminium


↔ Sections Width
90 mm

⚙️ Guarantee
2 years

Radiator width for made to order size (mm)
((n × 93)-3) mm





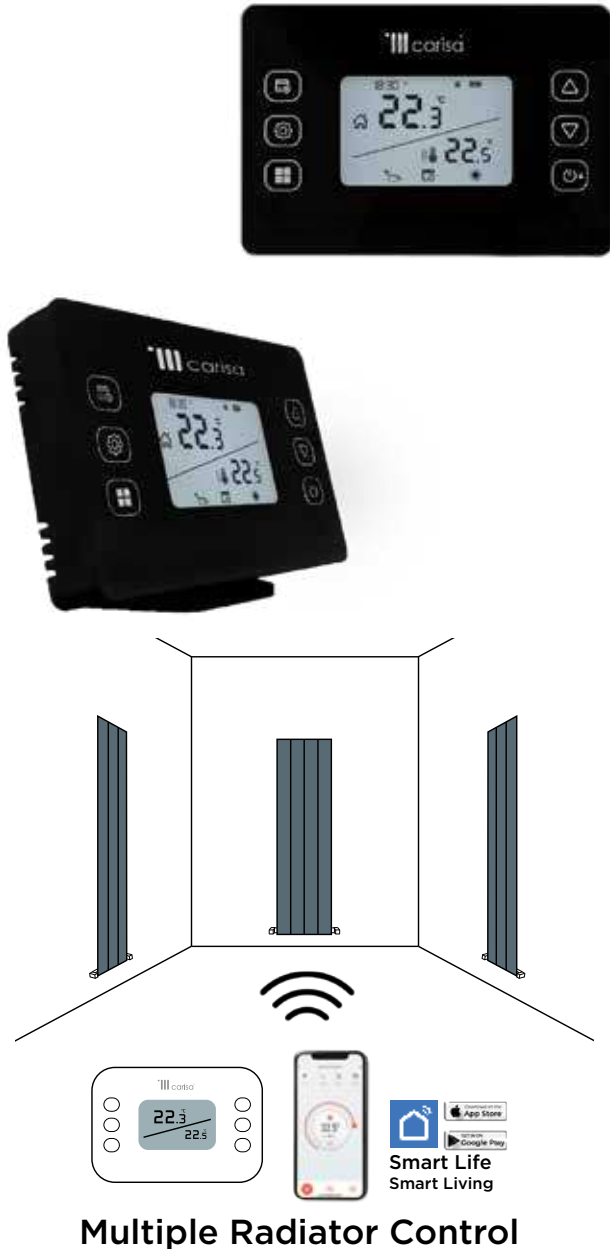

Multiple Radiator Control



- The Boreas radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.
- Boreas Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

The product comes with a paired wifi thermostat.


Boreas Hybrid is a perfect combination of central heating radiators and dry heated electric radiators with a smart Wi-Fi controller. It is integrated into the central heating system when the combi boiler is on during the cold winter period. It is also suitable for use on cold days in spring or autumn with electric heaters. Our hybrid heating technology is the most efficient way for electric heating, as we directly heat the aluminum body of the radiator


New Smart Electric Radiators provide below three key features by using mobile apps and wifi thermostat.

1. 24-hour or Timer Control.
2. Thermostatic Control. Accurate room temperature measurement by our wifi electronic digital thermostat.
3. Smart Control, Open door or window recognition Weekly /Daily Programmable technology to automate heating cycles.


Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70	Power (W)
14BHB1800027603	1800	276	3	366	69	122	10,1	1,2	D	897	3059	4706	1500
14BHB1800036904	1800	369	4	459	69	122	14,2	1,6	D	1196	4078	6274	2000
14BHB1800046205	1800	462	5	552	69	122	18,3	2,0	D	1495	5098	7843	2500
14BHB1800055506	1800	555	6	645	69	122	22,4	2,4	D	1794	6118	9412	3000

Material Aluminium	Max. Working Pressure 10 bar	Connections 1/2"	Pipe Centre (W+90) mm	
Guarantee 2 years	Max. Working Temperature 95°C	Sections Width 90 mm	Radiator width for made to order size (mm) ((n × 93)-3) mm	
EPD READY	IPX4	Low Voltage Directive		

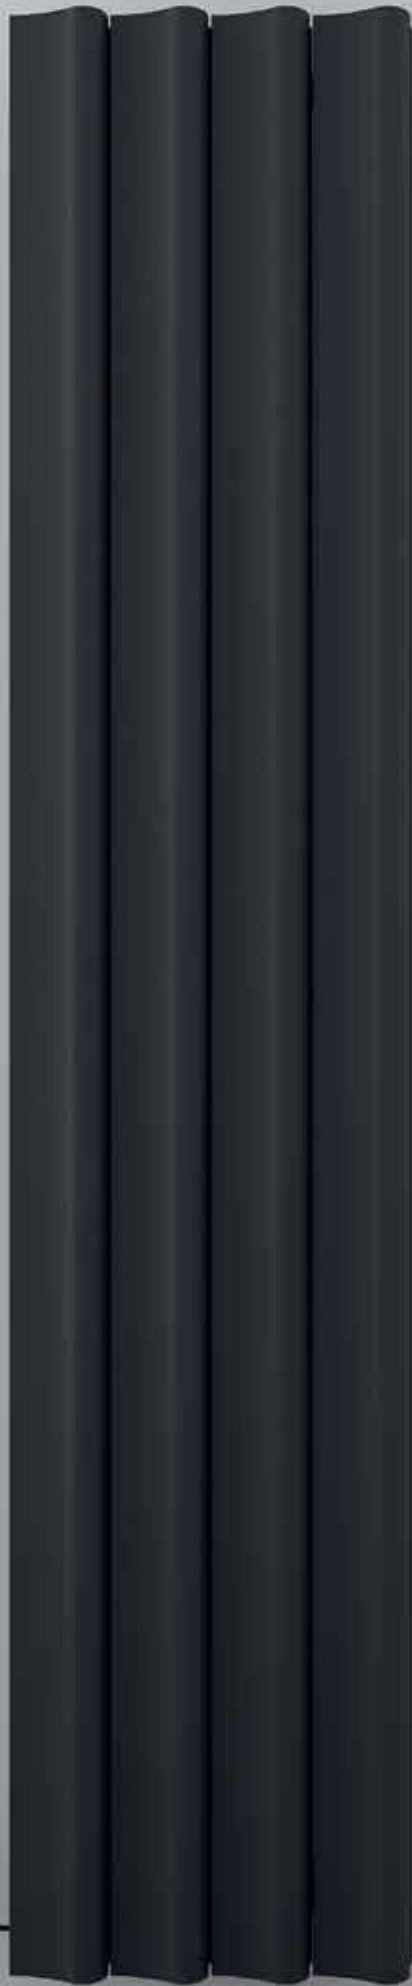

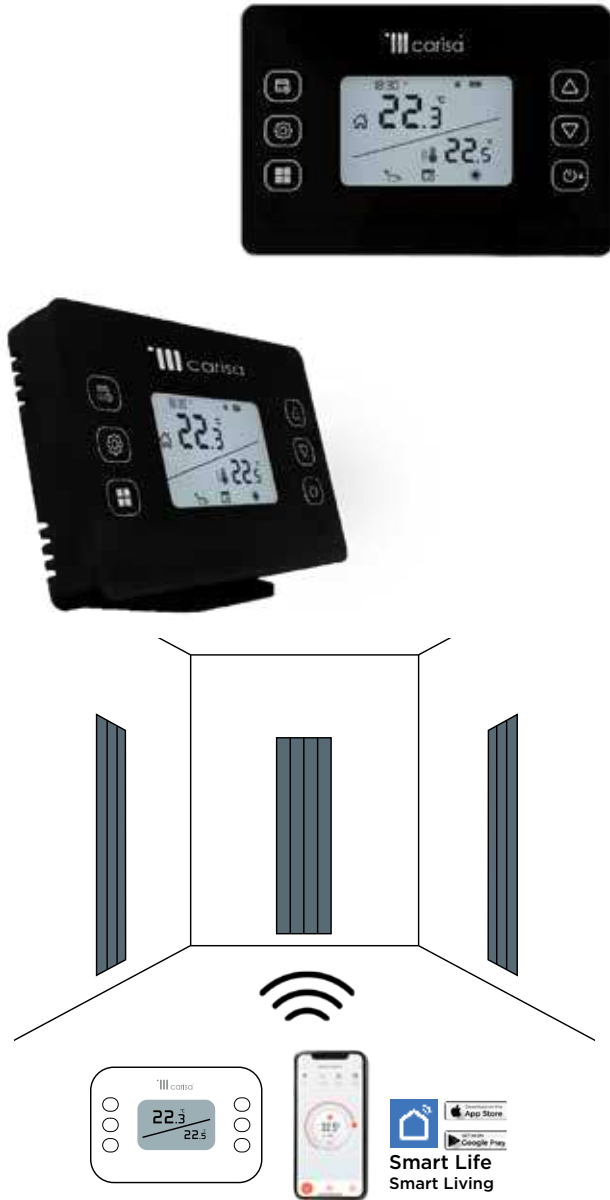

Multiple Radiator Control

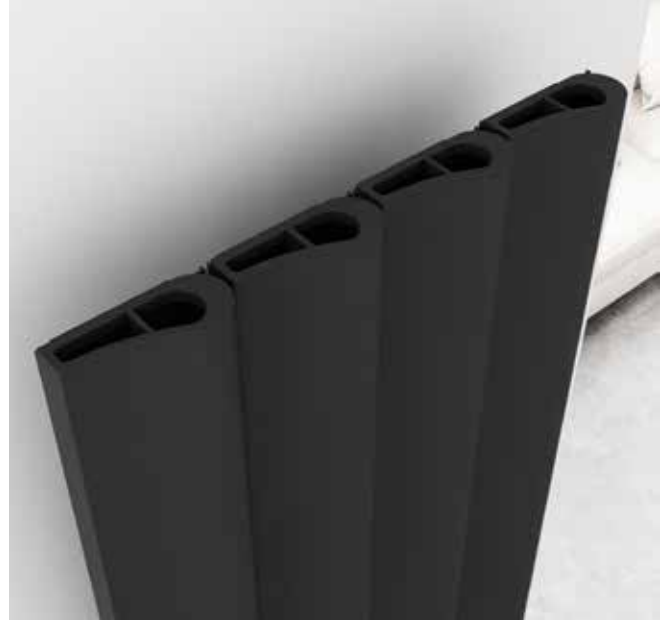

➤ The Boreas radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.

➤ Boreas Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

The product comes with a paired wifi thermostat.

New Smart Electric Radiators provide below three key features by using mobile apps and wifi thermostat.

1. 24-hour or Timer Control.
2. Thermostatic Control. Accurate room temperature measurement by our wifi electronic digital thermostat.
3. Smart Control, Open door or window recognition Weekly /Daily Programmable technology to automate heating cycles.

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
14BRS1800027603	1800	276	3	111	10,0	E	1500
14BRS1800036904	1800	369	4	111	12,7	E	2000
14BRS1800046205	1800	462	5	111	15,3	E	2500
14BRS1800055506	1800	555	6	111	18,0	E	3000
14BRS1200027603	1200	276	3	111	6,6	E	900
14BRS1200036904	1200	369	4	111	8,5	E	1200
14BRS1200046205	1200	462	5	111	10,2	E	1500
14BRS1200055506	1200	555	6	111	12,0	E	1800
14BRS0600055506	600	555	6	111	7,3	E	1200
14BRS0600074108	600	741	8	111	9,1	E	1600
14BRS0600092710	600	927	10	111	10,9	E	2000
14BRS0600111312	600	1113	12	111	12,6	E	2400
14BRS0600129914	600	1299	14	111	14,4	E	2800

Al Material Aluminium


↔ Sections Width 90 mm

⚙️ Guarantee 2 years

Radiator width for made to order size (mm) ((n × 93)-3) mm





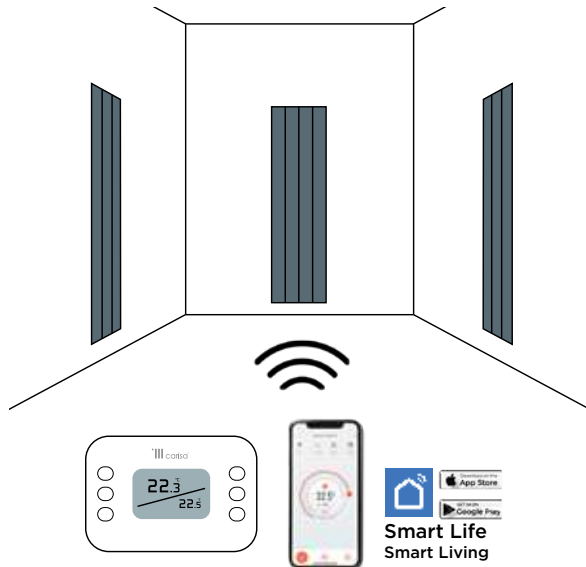

Multiple Radiator Control

➤ The Boreas radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.

➤ Boreas Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

The product comes with a paired wifi thermostat.

New Smart Electric Radiators provide below three key features by using mobile apps and wifi thermostat.

1. 24-hour or Timer Control.
2. Thermostatic Control. Accurate room temperature measurement by our wifi electronic digital thermostat.
3. Smart Control, Open door or window recognition Weekly /Daily Programmable technology to automate heating cycles.

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
14BSM1800036904	1800	369	4	111	16	E	2000
14BSM1800046205	1800	462	5	111	18,7	E	2500

Al Material
Aluminium


↔ Sections Width
90 mm

⚙️ Guarantee
2 years

Radiator width for made to order size (mm)
((n × 93)-3) mm





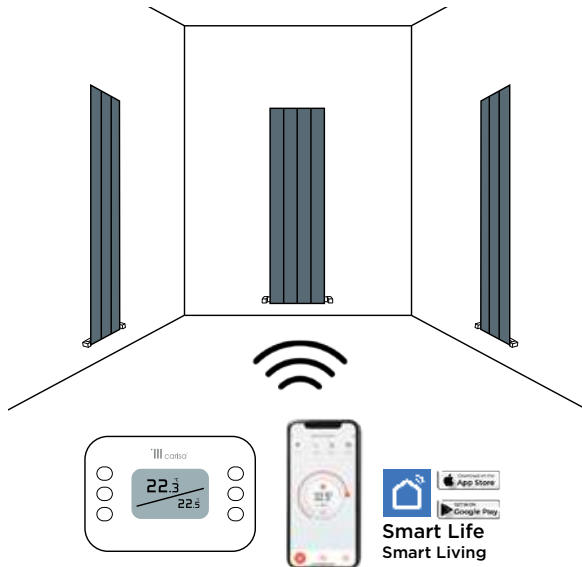

Multiple Radiator Control

- The Boreas radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.
- Boreas Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

The product comes with a paired wifi thermostat.

Boreas Hybrid is a perfect combination of central heating radiators and dry heated electric radiators with a smart Wi-Fi controller. It is integrated into the central heating system when the combi boiler is on during the cold winter period. It is also suitable for use on cold days in spring or autumn with electric heaters. Our hybrid heating technology is the most efficient way for electric heating, as we directly heat the aluminum body of the radiator



New Smart Electric Radiators provide below three key features by using mobile apps and wifi thermostat.

1. 24-hour or Timer Control.
2. Thermostatic Control. Accurate room temperature measurement by our wifi electronic digital thermostat.
3. Smart Control, Open door or window recognition Weekly /Daily Programmable technology to automate heating cycles.

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70	Power (W)
14BHS1800027603	1800	276	3	366	69	122	10,3	1,2	D	915	3121	4801	1500
14BHS1800036904	1800	369	4	459	69	122	14,5	1,6	D	1219	4158	6397	2000
14BHS1800046205	1800	462	5	552	69	122	18,7	2,0	D	1525	5200	8000	2500
14BHS1800055506	1800	555	6	645	69	122	22,8	2,4	D	1830	6239	9599	3000

Material Aluminium	Max. Working Pressure 10 bar	Connections 1/2"	Pipe Centre (W+90) mm	
Guarantee 2 years	Max. Working Temperature 95°C	Sections Width 90 mm	Radiator width for made to order size (mm) ((n × 93)-3) mm	
EPD READY	IPX4	Low Voltage Directive		



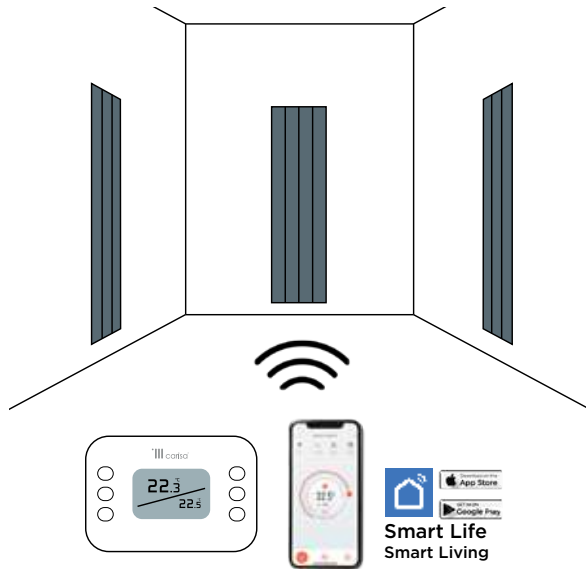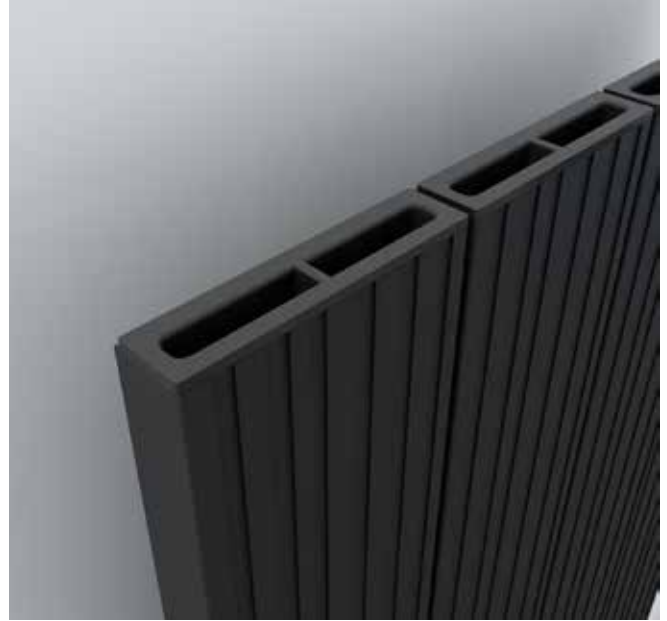

Multiple Radiator Control

- The Boreas radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.
- Boreas Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

The product comes with a paired wifi thermostat.

New Smart Electric Radiators provide below three key features by using mobile apps and wifi thermostat.

1. 24-hour or Timer Control.
2. Thermostatic Control. Accurate room temperature measurement by our wifi electronic digital thermostat.
3. Smart Control, Open door or window recognition Weekly /Daily Programmable technology to automate heating cycles.

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
14BOM1800027603	1800	276	3	93	10,3	E	1500
14BOM1800036904	1800	369	4	93	13,1	E	2000
14BOM1800046205	1800	462	5	93	15,8	E	2500
14BOM1800055506	1800	555	6	93	18,6	E	3000
14BOM1200027603	1200	276	3	93	6,8	E	900
14BOM1200036904	1200	369	4	93	8,7	E	1200
14BOM1200046205	1200	462	5	93	10,5	E	1500
14BOM1200055506	1200	555	6	93	12,4	E	1800
14BOM0600055506	600	555	6	93	7,5	E	1200
14BOM0600074108	600	741	8	93	9,3	E	1600
14BOM0600092710	600	927	10	93	11,2	E	2000
14BOM0600111312	600	1113	12	93	13,0	E	2400
14BOM0600129914	600	1299	14	93	14,8	E	2800

Al Material Aluminium


↔ Sections Width 90 mm

⚙️ Guarantee 2 years

Radiator width for made to order size (mm) ((n × 93)-3) mm





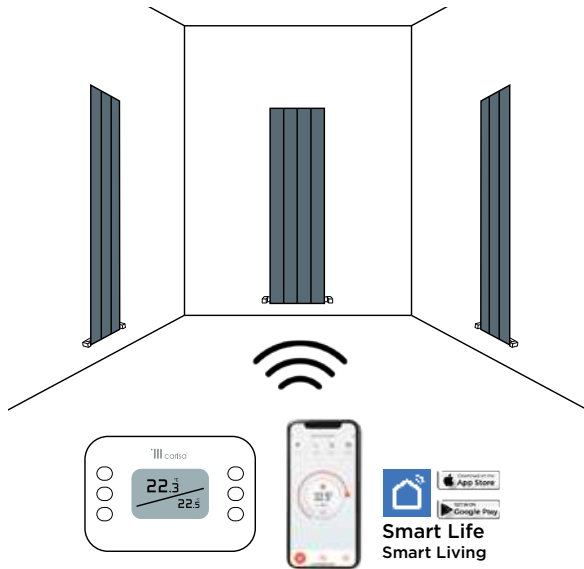

Multiple Radiator Control

- The Boreas radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.
- Boreas Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

The product comes with a paired wifi thermostat.

Boreas Hybrid is a perfect combination of central heating radiators and dry heated electric radiators with a smart Wi-Fi controller. It is integrated into the central heating system when the combi boiler is on during the cold winter period. It is also suitable for use on cold days in spring or autumn with electric heaters. Our hybrid heating technology is the most efficient way for electric heating, as we directly heat the aluminum body of the radiator


New Smart Electric Radiators provide below three key features by using mobile apps and wifi thermostat.

1. 24-hour or Timer Control.
2. Thermostatic Control. Accurate room temperature measurement by our wifi electronic digital thermostat.
3. Smart Control, Open door or window recognition Weekly /Daily Programmable technology to automate heating cycles.

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Pipe Centres (mm)	Wall to Centre Tapping (mm)	Projection from Wall (mm)	Product Weight (kg)	Internal Volume (L)	Fuel Type	Watt Δ T50	BTU Δ T50	BTU Δ T70	Power (W)
14BHM1800027603	1800	276	3	366	69	104	10,3	1,2	D	878	2992	4801	1500
14BHM1800036904	1800	369	4	459	69	104	14,5	1,6	D	1170	3990	6397	2000
14BHM1800046205	1800	462	5	552	69	104	18,7	2,0	D	1463	4987	8000	2500
14BHM1800055506	1800	555	6	645	69	104	22,8	2,4	D	1755	5985	9599	3000

Material Aluminium	Max. Working Pressure 10 bar	Connections 1/2"	Pipe Centre (W+90) mm		
Guarantee 2 years	Max. Working Temperature 95°C	Sections Width 90 mm	Radiator width for made to order size (mm) ((n × 93)-3) mm		
EPD READY	IPX4	Low Voltage Directive			



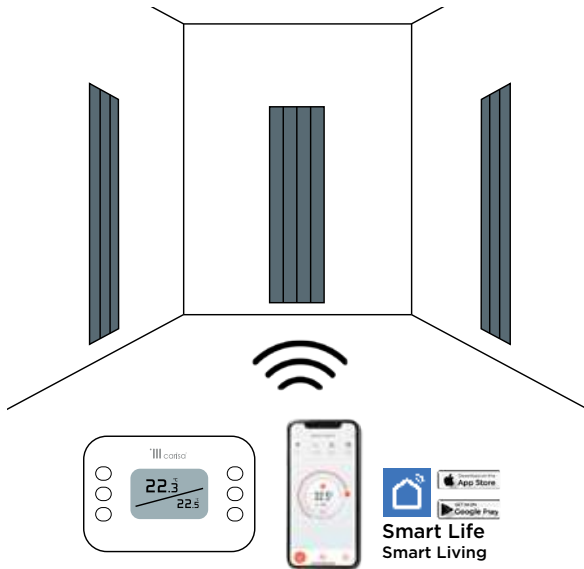

Multiple Radiator Control

➤ The Boreas radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.

➤ Boreas Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

The product comes with a paired wifi thermostat.

New Smart Electric Radiators provide below three key features by using mobile apps and wifi thermostat.

1. 24-hour or Timer Control.
2. Thermostatic Control. Accurate room temperature measurement by our wifi electronic digital thermostat.
3. Smart Control, Open door or window recognition Weekly /Daily Programmable technology to automate heating cycles.


Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
14BRF1800050004	1800	500	4	74	12,4	E	2000
14BRF1800040003	1800	400	3	74	9,9	E	1500
14BRF1800030002	1800	300	2	74	7,3	E	1000
14BRF1200050004	1200	500	4	74	8,2	E	1200
14BRF1200030002	1200	300	2	74	4,8	E	600

Al Material
Aluminium

Guarantee
2 years





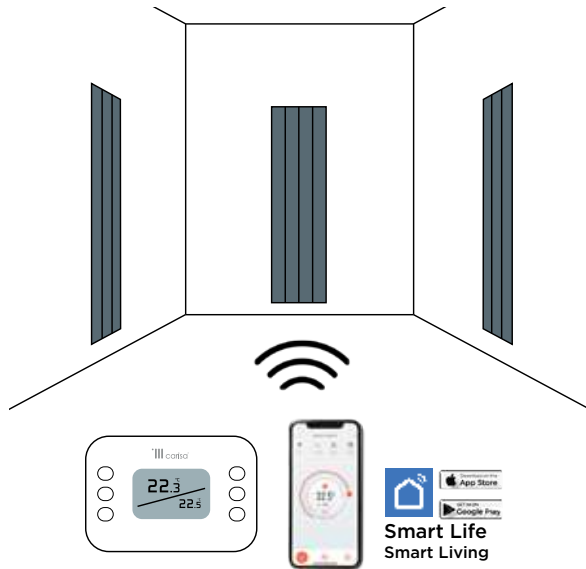

Multiple Radiator Control

➤ The Boreas radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.

➤ Boreas Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

The product comes with a paired wifi thermostat.

New Smart Electric Radiators provide below three key features by using mobile apps and wifi thermostat.

1. 24-hour or Timer Control.
2. Thermostatic Control. Accurate room temperature measurement by our wifi electronic digital thermostat.
3. Smart Control, Open door or window recognition Weekly /Daily Programmable technology to automate heating cycles.


Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
18BRF1200040003	1200	400	3	74	6,5	E	900
18BRF0800040003	800	400	3	74	3,3	E	600

Al Material
Aluminium

Guarantee
2 years





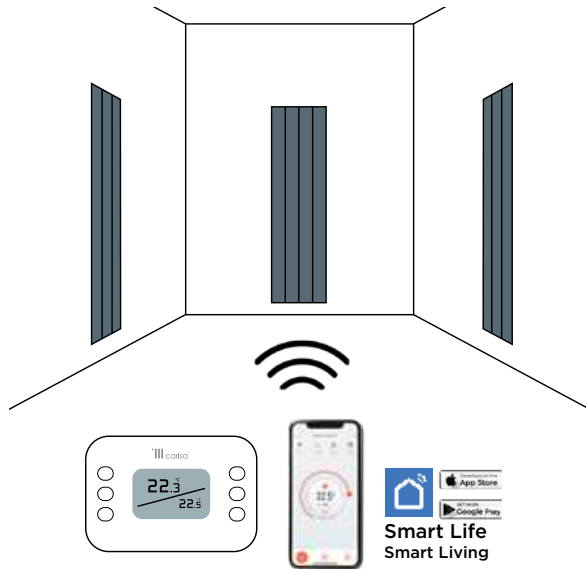

Multiple Radiator Control

► The Boreas radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.

Boreas Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

The product comes with a paired wifi thermostat.

Boreas Flat Mirror is a multi-functional electric heater designed for your bathroom. It includes a power socket for your shaver and toothbrush charger, a fogless mirror, and a towel hanger and shelf for your bathroom essentials. This product provides warmth and comfort for your bathroom.


New Smart Electric Radiators provide below three key features by using mobile apps and wifi thermostat.

1. 24-hour or Timer Control.
2. Thermostatic Control. Accurate room temperature measurement by our wifi electronic digital thermostat.
3. Smart Control, Open door or window recognition Weekly /Daily Programmable technology to automate heating cycles.

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
18BFM1200040003	1200	400	3	74	6,5	E	900





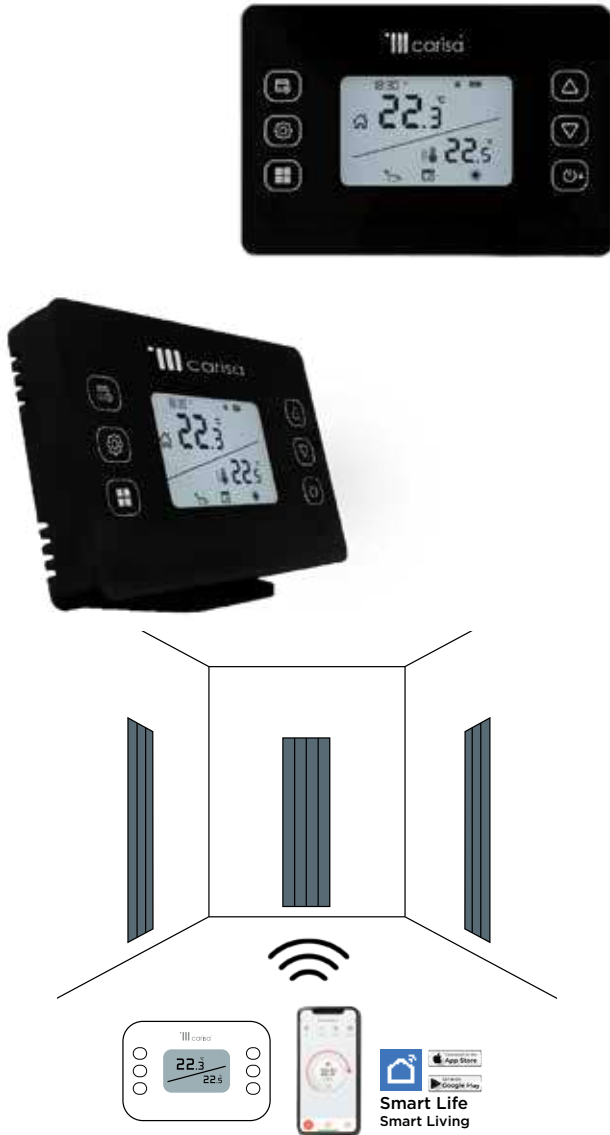

Multiple Radiator Control

► The Boreas Notus radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.

► Boreas Notus Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

The product comes with a paired wifi thermostat.

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
14NTV1800020002	1800	200	2	90-110	8,4	E	1000
14NTV1800040004	1800	400	4	90-110	15,6	E	2000
14NTV0600040004	600	400	4	90-110	5,3	E	800
14NTV0600060006	600	600	6	90-110	7,3	E	1200
14NTV0600080008	600	800	8	90-110	9,4	E	1600
14NTV0600100010	600	1000	10	90-110	11,4	E	2000
14NTV0600120012	600	1200	12	90-110	13,4	E	2400
14NTV0600140014	600	1400	14	90-110	15,5	E	2800

A full range of made to order size available.

Material
Aluminium


Guarantee
2 years

Sections Width
100 mm

Radiator width for made to order size (mm)
(n × 100) mm





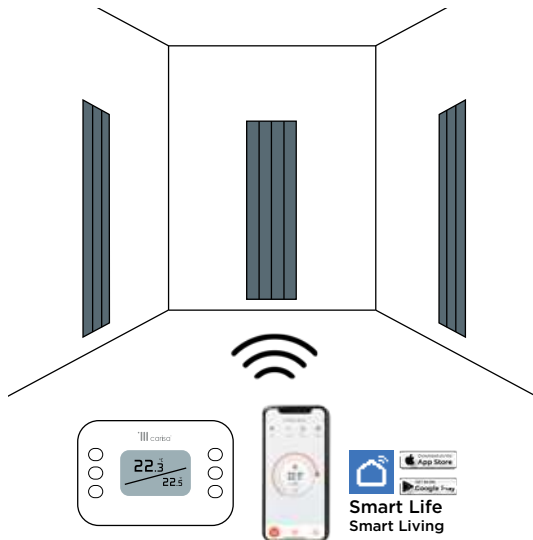

Multiple Radiator Control



► The Boreas Notus radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.

► Boreas Notus Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

The product comes with a paired wifi thermostat.

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
14NTZ1800020002	1800	200	2	90-110	8,4	E	1000
14NTZ1800040004	1800	400	4	90-110	15,6	E	2000
14NTZ0600040004	600	400	4	90-110	5,3	E	800
14NTZ0600060006	600	600	6	90-110	7,3	E	1200
14NTZ0600080008	600	800	8	90-110	9,4	E	1600
14NTZ0600100010	600	1000	10	90-110	11,4	E	2000
14NTZ0600120012	600	1200	12	90-110	13,4	E	2400
14NTZ0600140014	600	1400	14	90-110	15,5	E	2800


A full range of made to order size available.

Al Material Aluminium
 ⚙️ Guarantee 2 years

↔️ Sections Width 100 mm
 Radiator width for made to order size (mm) (n × 100) mm





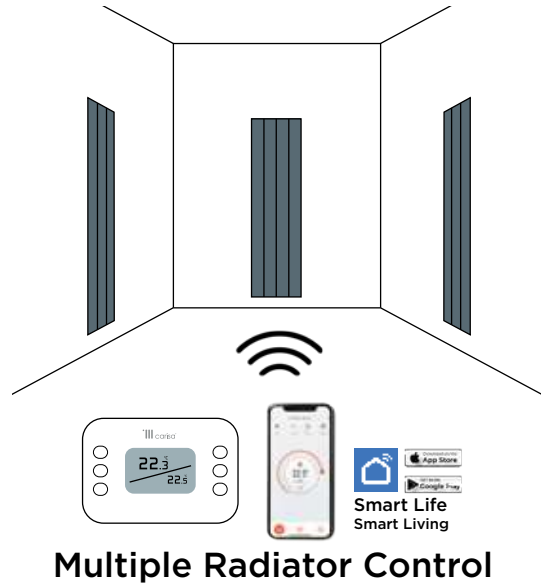


- The Boreas Notus radiator is not only ingenious but in multiple installations only one thermostat is required to control three products, saving you money.
- Boreas Notus Electric Radiators work with smart wifi thermostat. There must be at least one thermostat paired with the radiator. A single control thermostat can be paired for multiple radiators in the same room/space. For separate rooms/spaces, it must be paired with a separate control thermostat.

Boreas Notus S can be installed as multiple units, and all units can be controlled with just one Wi-Fi thermostat. Please note that the product does not come with a thermostat in the box.

- **Please remember to add the thermostat to your order, whether you are purchasing a single item or multiple items.**

Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
18NTS2000010001	2000	100	1	84	4,3	E	500
18NTS1600010001	1600	100	1	84	3,5	E	300
18NTS1000010001	1000	100	1	84	2,6	E	200

A full range of made to order size available.





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
18OSB1200007501	1200	75	1	163-183	2,6	E	200
18OSB1800007501	1800	75	1	163-183	3,9	E	300

A full range of made to order size available.





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
18VSB1200007001	1200	70	1	163-183	2,4	E	200
18VSB1800007001	1800	70	1	163-183	3,6	E	300

A full range of made to order size available.

 Material
Aluminium

 Guarantee
2 years

 Low Voltage
Directive

 IP44


 



Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
18MAX1500003001	1500	30	1	93	3,4	E	40

A full range of made to order size available.

 Material
Stainless Steel

 Guarantee
2 years

 Low Voltage
Directive

 IP55





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
18DAN1500003201	1500	32	1	112	3,1	E	40

A full range of made to order size available.

 Material
Stainless Steel
 Guarantee
2 years

 Low Voltage
Directive

 IP55





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Power (W)
18FEL1200030002	1200	300	2	75	5,1	80

A full range of made to order size available.

 Material
Stainless Steel

 Guarantee
2 years

 Low Voltage
Directive

 **IP55**





Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Fuel Type	Power (W)
18VEO1200030002	1200	300	2	80	4,0	E	80

A full range of made to order size available.

 Material
Stainless Steel
 Guarantee
2 years

 Low Voltage
Directive

 IP55




Product Code	Radiator Height (mm) H	Radiator Width (mm) W	Sections (n)	Projection from Wall (mm)	Product Weight (kg)	Power (W)
18NEO580041004	580	410	4	130	2,9	110

A full range of made to order size available.



Material
Stainless Steel



Smooth Feel



Four bar rotation



Guarantee
2 years



Thermostatic touch
screen timing switch



WIFI Stepless
knob switch





21100901

SPERA ANGLED VALVES CHROME



21100902

SPERA STRAIGHT VALVES CHROME



21100903

SPERA CORNER (DOUBLE ANGLED) VALVES CHROME



21100904 (W) 21100905 (B) 21100906 (A)
SPERA ANGLED VALVES
WHITE (W) / BLACK (B) / ANTHRACITE (A)



21100907 (W) 21100908 (B) 21100909 (A)
SPERA STRAIGHT VALVES
WHITE (W) / BLACK (B) / ANTHRACITE (A)



21100910 (W) 21100911 (B) 21100912 (A)
SPERA CORNER (DOUBLE ANGLED) VALVES
WHITE (W) / BLACK (B) / ANTHRACITE (A)



21100913

SPERA ANGLED VALVES BRUSHED NICKEL



21100914

SPERA STRAIGHT VALVES BRUSHED NICKEL



21100915

SPERA CORNER (DOUBLE ANGLED) VALVES
BRUSHED NICKEL



21100916

MINIMALIST ANGLED VALVES CHROME



21100917

MINIMALIST STRAIGHT VALVES CHROME



21100918

MINIMALIST CORNER (DOUBLE ANGLED) CHROME



21100919 (W) 21100920 (B) 21100921 (A)
MINIMALIST ANGLED VALVES
WHITE (W) / BLACK (B) / ANTHRACITE (A)



21100922 (W) 21100923 (B) 21100924 (A)
MINIMALIST STRAIGHT VALVES
WHITE (W) / BLACK (B) / ANTHRACITE (A)



21100925 (W) 21100926 (B) 21100927 (A)
MINIMALIST CORNER (DOUBLE ANGLED) VALVES
WHITE (W) / BLACK (B) / ANTHRACITE (A)



21100928 (W) 21100929 (B) 21100930 (A)
THERMOSTATIC ANGLED VALVES
WHITE (W) / BLACK (B) / ANTHRACITE (A)



21100931 (W) 21100932 (B) 21100933 (A)
THERMOSTATIC STRAIGHT VALVES
WHITE (W) / BLACK (B) / ANTHRACITE (A)



21100934 (W) 21100935 (B) 21100936 (A)
THERMOSTATIC CORNER (DOUBLE ANGLED) VALVES
WHITE (W) / BLACK (B) / ANTHRACITE (A)



21100937

THERMOSTATIC ANGLED VALVES CHROME



21100938

THERMOSTATIC STRAIGHT VALVES CHROME



21100939

THERMOSTATIC CORNER (DOUBLE ANGLED) VALVES CHROME



21100940

THERMOSTATIC ANGLED VALVES
BRUSHED NICKEL



21100941

THERMOSTATIC STRAIGHT VALVES
BRUSHED NICKEL



21100942

THERMOSTATIC CORNER (DOUBLE ANGLED) VALVES
BRUSHED NICKEL



21100943

TRADITIONAL ANGLED VALVES CHROME



23100XXX

DIGITAL HEATING ELEMENT CHROME



23100XXX

DIGITAL HEATING ELEMENT WHITE




23100XXX

DIGITAL HEATING ELEMENT BLACK



23100XXX

ON-OFF HEATING ELEMENT CHROME



23100XXX

ON-OFF HEATING ELEMENT WHITE



23100XXX

ON-OFF HEATING ELEMENT BLACK



23100XXX

SIGMA HEATING ELEMENT CHROME



23100XXX

SIGMA HEATING ELEMENT WHITE



23100XXX

SIGMA HEATING ELEMENT BLACK



23100085

SMART CONTROL THERMOSTAT WHITE



23100086

SMART CONTROL THERMOSTAT BLACK

- Please, consult sales representative, for suitable heating element in terms of watt capacity of towel heater you choose.
- 23100XXX : Check the price list for final product codes before ordering!



32100507
LONG CHROME PIPE SLEEVE COVER



32100508
LONG WHITE PIPE SLEEVE COVER



32100509
SHORT CHROME PIPE SLEEVE COVER



32100510
SHORT WHITE PIPE SLEEVE COVER



32100511
DOUBLE CHROME PIPE SLEEVE COVER



32100512
DOUBLE WHITE PIPE SLEEVE COVER



32100513
LONG CHROME COIL SPRING PIPE SLEEVE COVER



32100514
LONG WHITE COIL SPRING PIPE SLEEVE COVER



32100515
SHORT CHROME COIL SPRING PIPE SLEEVE COVER



32100516
SHORT WHITE COIL SPRING PIPE SLEEVE COVER



32100517
STANDART BLIND TAP



32100518
STANDART BLEEDING VALVE



32100502
SLIM BLIND TAP



32100503
SLIM BLEEDING VALVE



32100504
BLEEDING VALVE KEY



32100506
T-PIECE FOR DUAL VERSIONS

**S TYPE TOWEL HOLDER** 22100500


Height (mm)	Width (mm)	Depth (mm)
120	400	152

ELVINO
 MONZA DOUBLE
 NEMO DOUBLE
 NEMO
 MONZA
 CHAMBORD
 ANGERS
 CHAMBORD DOUBLE
 ANGERS DOUBLE
 BOREAS N
 BOREAS HYBRID N
 BOREAS S
 BOREAS HYBRID S
 BOREAS M
 BOREAS HYBRID M
 BOREAS B
 BOREAS HYBRID B
 SLIM
 DUNE

**L TYPE TOWEL HOLDER** 22100501

Height (mm)	Width (mm)	Depth (mm)
120	400	152

ELVINO
 MONZA DOUBLE
 NEMO DOUBLE
 NEMO
 MONZA
 CHAMBORD
 ANGERS
 CHAMBORD DOUBLE
 ANGERS DOUBLE
 BOREAS N
 BOREAS HYBRID N
 BOREAS S
 BOREAS HYBRID S
 BOREAS M
 BOREAS HYBRID M
 BOREAS B
 BOREAS HYBRID B
 SLIM
 DUNE

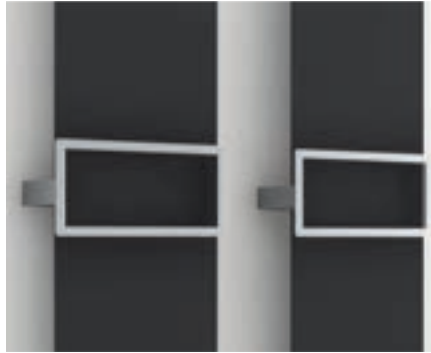**R TYPE TOWEL HOLDER** 22100502

Height (mm)	Width (mm)	Depth (mm)
100	300	135

CROYDON

**Q TYPE TOWEL HOLDER** 22100503

Height (mm)	Width (mm)	Depth (mm)
200	200	135

CROYDON

**C TYPE TOWEL HOLDER** 22100505

Height (mm)	Width (mm)	Depth (mm)
40	400	130

NEMO
 MONZA
 CHAMBORD
 ANGERS
 CHAMBORD DOUBLE
 ANGERS DOUBLE
 BOREAS N
 BOREAS HYBRID N
 BOREAS S
 BOREAS HYBRID S
 BOREAS M
 BOREAS HYBRID M
 BOREAS B
 BOREAS HYBRID B

**H TYPE TOWEL HOLDER** 22100506

Height (mm)	Width (mm)	Depth (mm)
120	700	35

NEMO
 MONZA
 SLIM
 DUNE

X TYPE TOWEL HOLDER 22100504


Height (mm)	Width (mm)	Depth (mm)
10	470	140

ELVINO
 MONZA DOUBLE
 NEMO DOUBLE
 NEMO
 MONZA
 CHAMBORD
 ANGERS
 CHAMBORD DOUBLE
 ANGERS DOUBLE
 BOREAS N
 BOREAS HYBRID N
 BOREAS S
 BOREAS HYBRID S
 BOREAS M
 BOREAS HYBRID M
 BOREAS B
 BOREAS HYBRID B

**CURVY TOWEL HOLDER** 22100507

Height (mm)	Width (mm)	Depth (mm)
40	290	100

CURVY 2 SEC.

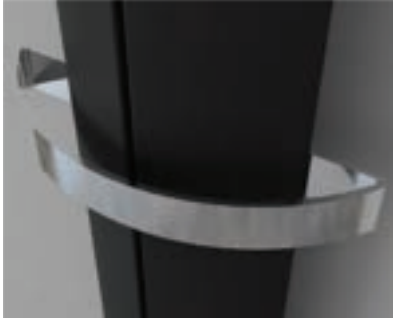

NIXIE TOWEL HOLDER 22100508		
Height (mm)	Width (mm)	Depth (mm)
40	305	90
CURVY 2 SEC.		



OTTO S TOWEL HOLDER 22100509		
Height (mm)	Width (mm)	Depth (mm)
130	130	100
OTTO S		



VESTA S TOWEL HOLDER 22100510		
Height (mm)	Width (mm)	Depth (mm)
100	100	100
VESTA S		



I TYPE TOWEL HOLDER 22100511		
Height (mm)	Width (mm)	Depth (mm)
120	40	35
NEMO MONZA SLIM DUNE		



K TYPE TOWEL HOLDER 22100513		
Height (mm)	Width (mm)	Depth (mm)
179	375	35
NEMO MONZA SLIM DUNE		



O TYPE TOWEL HOLDER 22100514		
Height (mm)	Width (mm)	Depth (mm)
300	300	35
NEMO MONZA SLIM DUNE		



PAPILLION TOWEL HOLDER 22100515		
Height (mm)	Width (mm)	Depth (mm)
120	300	95
PAPILLION 2 SEC.		



PLAY TOWEL HOLDER 22100521		
Height (mm)	Width (mm)	Depth (mm)
405	40	95
NEMO MONZA SLIM DUNE		



TWINS TOWEL HOLDER 22100516		
Height (mm)	Width (mm)	Depth (mm)
150	90	35
NEMO MONZA SLIM DUNE		



RACK TOWEL HOLDER 22100517		
Height (mm)	Width (mm)	Depth (mm)
405	40	95
NEMO MONZA SLIM DUNE		




N TYPE TOWEL HOLDER 22100512		
Height (mm)	Width (mm)	Depth (mm)
150	90	35
NEMO MONZA SLIM DUNE		




POINT TYPE TOWEL KNOB 22100520		
Height (mm)	Width (mm)	Depth (mm)
405	40	95
NEMO MONZA SLIM DUNE		

CONNECTION TYPES

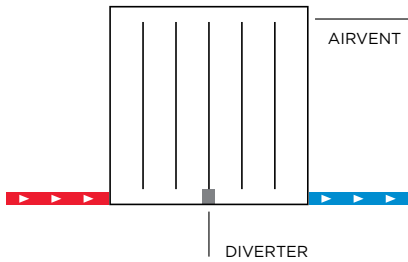


BOTTOM OPPOSITE SIDE CONNECTION (10)

- Can be applied to all models. On radiators up to 10 segments, a diverter supplied free of charge must be installed between the 3. and 4. segments. Airvent must be installed diagonally to this diverter. (except Elvino Double). Please ask for availability.

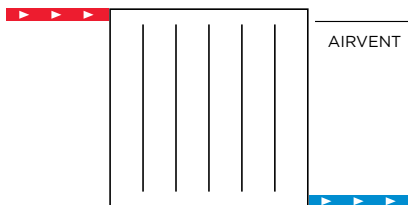


TOP - BOTTOM OPPOSITE SIDE CONNECTION (10)

- Can be applied to all models.
- Hot water inlet connection must be on top side and the airvent on the side across. Please ask for availability.

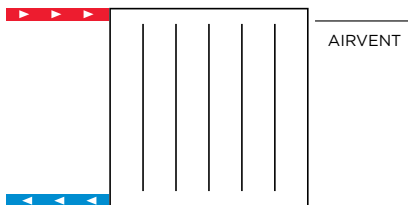


TOP - BOTTOM SAME SIDE CONNECTION (10)

- Can be applied to all models.
- Hot water inlet connection must be on top side and the airvent on the side across. Please ask for availability.

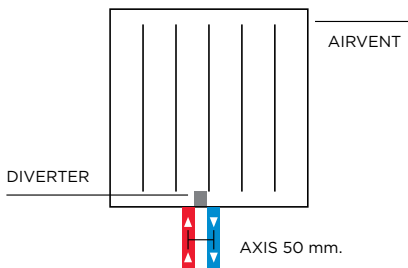


HB CONNECTION - MIDDLE (11)

- Can be applied to all models.
- Diverter comes ready installed with the product.
- Outer connection must be used for the hot water inlet and inner connection for the outlet.
- Optimal performance can not be reached, otherwise. Please ask for availability.

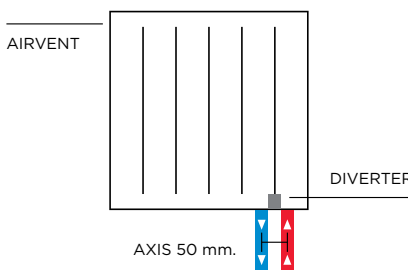


HB CONNECTION- RIGHT SIDE (12)

- Can be applied to all models.
- Diverter comes ready installed with the product.
- Outer connection must be used for the hot water inlet and inner connection for the outlet.
- Optimal performance can not be reached any otherwise. Please ask for availability.

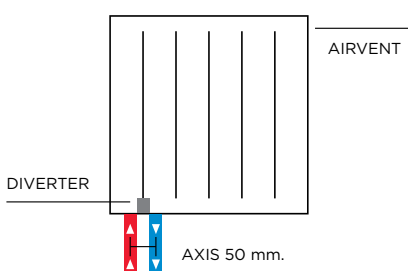


HB CONNECTION- LEFT SIDE (13)

- Can be applied to all models.
- Diverter comes ready installed with the product.
- Outer connection must be used for the hot water inlet and inner connection for the outlet.
- Optimal performance can not be reached any otherwise. Please ask for availability.




BOTTOM INLET AND OUTLET CONNECTION (10)

- Can be applied to all towel radiator models.
- Hot water inlet and outlets can be connected to either side. Please ask for availability.




TOP - BOTTOM DIAGONAL CONNECTION (10)

- Can be applied to all towel radiator models.
- Hot water inlet can be connected on either top side and outlet can be connected to diagonal bottom side. Please ask for availability.




ELECTRIC (HEATING ELEMENT / PLUG IN) (14)

- If radiators have plug; Customer should have 230V AC 50-60H power supply which is suitable for EU plug. Radiator is worked by plugged. (P.S : UK plug is not standard, should be asked to sales team)
- If radiators have open cables; You need to ask an electrician to make correct connection and if possible hide inside the wall. Power supply should be 230V AC 50-60H. Those types radiators have own on/off switch button itself. Please ask for availability.

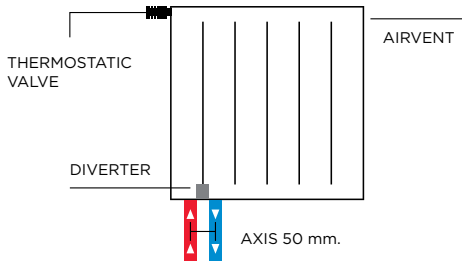


HB CONNECTION - LEFT SIDE WITH THERMOSTATIC VALVE (16)

- Can not be applied to all models. Diverter comes ready installed on the radiator. Outer connection must be used for the hot water inlet and inner connection for the outlet.
- Thermostatic valve and its element must be on top side of connection. Please ask for availability.

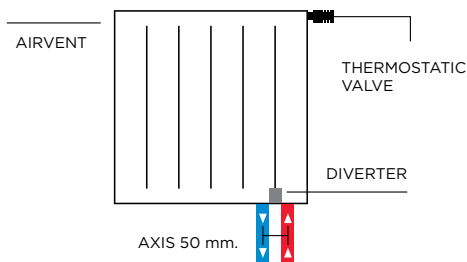

HB CONNECTION - RIGHT SIDE WITH THERMOSTATIC VALVE (17)

- Can not be applied to all models. Diverter comes ready installed on the radiator. Outer connection must be used for the hot water inlet and inner connection for the outlet.
- Thermostatic valve and its element must be on top side of connection. Please ask for availability.



FLEX PIPE CONNECTION (18)

- Flex pipe connection should be implemented for special models like "Jacobs Floor" or which have distance from wall to valve connection.
- Flex pipe length depends on the models and wall distance of valve connection holes. Please ask for availability.

Structure of Carisa SKU Number



AA : Product Groups

BBB : Model

CCCC : Height (mm)

DDDD : Width (mm)

EE : Number of sections

FF : Colour / Finish

GG : Connection Type

- 13 digits short codes are written in the product page as **'BBBCCCCDDDEE'**.
- Final SKU number should be consist of 19 digits.

Code	Connection Type
10	Standard Connections (Side,Right-Left,Top-Bottom,Cross)
11	HB 50 (MID)
12	HB 50 (RIGHT)
13	HB 50 (LEFT)
14	Electric (heating element / plug in)
15	HB 50 (LEFT) + Therm. Valve
16	HB 50 (RIGHT) + Therm. Valve
17	HB special dimension
18	Flex pipe conn.

Code	Product Groups
10	Aluminium Radiators
11	Stainless Steel Radiators
12	Steel Radiators
13	Flat Steel Radiators
14	Electric Radiators
15	Aluminium Towel Warmers
16	Stainless Steel Towel Warmers
17	Steel Towel Warmers
18	Electric Towel Warmers
19	Convactor/FCU

ICONS TABLE

	Material Steel
	Material Aluminium
	Material Stainless Steel
	Guarantee
	Max. Working Pressure
	Max. Working Temperature
	Connections
	Sections Width
	Sections Depth
	Pipe Centre
	Eco Design
	Electrical Heating (fuel type : E)
	Volts
	Central Heating (fuel type : C)
	Dual Heating (fuel type : D)
	Mirror Product

Code	Colour / Finish Options	Finish Type	Implementable Product Groups	Standard / Special	Plastic Caps (Alum.)
10	White	Paint	Aluminium / Stainless Steel /Steel	Standard	in colour
11	Black	Paint	Aluminium / Stainless Steel /Steel	Standard	in colour
12	Dark Grey	Paint	Aluminium / Stainless Steel /Steel	Standard	in colour
13	Light Grey	Paint	Aluminium / Stainless Steel /Steel	Standard	in colour
14	Anthracite	Paint	Aluminium / Stainless Steel /Steel	Standard	in colour
15	Traffic/Glossy White	Paint	Aluminium / Stainless Steel /Steel	Standard	in colour
16	Pure White	Paint	Aluminium / Stainless Steel /Steel	Special	Chrome
17	Champagne	Paint	Aluminium / Stainless Steel /Steel	Special	Chrome
18	Latte	Paint	Aluminium / Stainless Steel /Steel	Special	Chrome
19	Metallic Matt Copper	Paint	Aluminium / Stainless Steel /Steel	Special	Chrome
20	Red	Paint	Aluminium / Stainless Steel /Steel	Special	Chrome
21	Metallic Ash Brown	Paint	Aluminium / Stainless Steel /Steel	Special	Chrome
22	Mocha	Paint	Aluminium / Stainless Steel /Steel	Special	Chrome
23	Metallic Gold	Paint	Aluminium / Stainless Steel /Steel	Special	Chrome
24	Pebble	Paint	Aluminium / Stainless Steel /Steel	Special	Chrome
25	Navy Blue	Paint	Aluminium / Stainless Steel /Steel	Special	Chrome
26	Metallic Khaki	Paint	Aluminium / Stainless Steel /Steel	Special	Chrome
27	Metallic Burgundy	Paint	Aluminium / Stainless Steel /Steel	Special	Chrome
28	Polished Anodized	Anodized	Aluminium	Special	Chrome
29	Matt Anodized	Anodized	Aluminium	Special	Chrome
33	Brushed Brass Anodized	Anodized	Aluminium	Special	Chrome
36	Chrome Plated	Chrome plating	Steel	Standard	NA
38	Satin Polished (Stp)	PVD Coating	Stainless Steel	Standard	NA
39	Mirror Polished (Mrp)	PVD Coating	Stainless Steel	Standard / Special	NA
35	Rose Gold - Pvd (Mrp)	PVD Coating	Stainless Steel	Special	NA
37	Gold - Pvd (Mrp)	PVD Coating	Stainless Steel	Special	NA
83	Rose Gold - Pvd (Stp)	PVD Coating	Stainless Steel	Special	NA
84	Gold - Pvd (Stp)	PVD Coating	Stainless Steel	Special	NA
85	Champagne - Pvd (Stp)	PVD Coating	Stainless Steel	Special	NA
86	Coffe - Pvd (Stp)	PVD Coating	Stainless Steel	Special	NA
87	Dark Rose Gold - Pvd (Stp)	PVD Coating	Stainless Steel	Special	NA
88	Gun Black - Pvd (Stp)	PVD Coating	Stainless Steel	Special	NA
89	Metallic Black - Pvd (Stp)	PVD Coating	Stainless Steel	Special	NA
90	Champagne - Pvd (Mrp)	PVD Coating	Stainless Steel	Special	NA
91	Coffe - Pvd (Mrp)	PVD Coating	Stainless Steel	Special	NA
92	Dark Rose Gold - Pvd (Mrp)	PVD Coating	Stainless Steel	Special	NA
93	Gun Black - Pvd (Mrp)	PVD Coating	Stainless Steel	Special	NA
94	Metallic Black - Pvd (Mrp)	PVD Coating	Stainless Steel	Special	NA

P.S : Please ask your special request to our sales representative to check availability in production before ordering.

P.S : See price list for price differences.

COLOUR CHART



TXW - White (10)



TXB - Black (11)



TXG - Dark Grey (12)



TXLG - Light Grey (13)



TXA - Anthracite (14)



W - Glossy White (15)



TXPW - Pure White (16)



TXC - Champagne (17)



TXL - Latte (18)



MATC - Matt Copper (19)



TXR - Red (20)



MAB - Metallic Ash Brown (21)



TXM - Mocha (22)



GLD - Metallic Gold (23)



TXP - Pebble (24)



TXNB - Navy Blue (25)



MK - Metallic Khaki (26)



MB - Metallic Burgundy (27)



Satin Polished (38)



Mirror Polished (39)



Rose Gold Mirror (35)



Gold Mirror (37)



Rose Gold Satin (83)



Gold Satin (84)



Champagne Satin (85)



Coffe Satin (86)



Dark Rose Gold Satin (87)



Gun Black Satin (88)



Metalic Black Satin (89)



Champagne Mirror (90)



Coffe Mirror (91)



Dark Rose Gold Mirror (92)



Gun Black Mirror (93)



Metalic Black Mirror (94)



Carisa Color Chart contains all Carisa colors. Our color chart will guide you when choosing the color of your radiator that will highlight your interior.

Example: A Delta T correction factor allows end-users and professionals to find out the actual output of a radiator or towel rail in the range of Delta T variations. The above calculator has been designed to efficiently calculate this based on input at Delta T 50°, alternatively, you can use the listed correction factors below, also based on Delta T 50°.

Delta T	Correction Factors
75°	1.69
70°	1.54
65°	1.41
60°	1.27
55°	1.13
50°	1
45°	0.87
40°	0.75
35°	0.63
30°	0.51
25°	0.41
20°	0.3
15°	0.21
10°	0.12
5°	0.05



Example: Assuming a radiator or towel rail has a heat output of 1000 Watts at ΔT (Delta T) = 50°. At ΔT (Delta T) = 60°, the output would be 1000 x 1.27 (from the table above) equating to 1270 Watts. Alternatively, at ΔT (Delta T) = 70°, output would be 1000 x 1.54 equating to 1540 Watts.

ALPHABETIC INDEX

ADAGIO	Luxury	10-11	LYMM	Ultra Slim	223
ADORE	Premium	114	MACK	Red Hot	174
AIDEN	Luxury	44-45	MACK BATH	Red Hot	194
AJAX I-II	Red Hot	191	MACK BATH H	Red Hot	195
ALDO	Red Hot	212	MAGICO	Luxury	26-27
ALIAS	Premium	115	MAGICO BATH	Luxury	52-53
ALVEOLE	Luxury	42-43	MAGICO DOUBLE	Luxury	28-29
ALYA BATH	Red Hot	192	MAGNUS F	Premium	131
ANGERS	Red Hot	166-167	MAGNUS W	Premium	130
ANGERS DOUBLE	Red Hot	164-165	MANCHESTER	Ultra Slim	224
AREN	Red Hot	178	MAXIM	Electric	270
ARLEN	Premium	116	MAYRA	Red Hot	207
BARO	Red Hot	179	MISTRAL	Premium	68
BARON L	Red Hot	202	MISTRAL F	Premium	69
BECK	Red Hot	184	MONZA	Red Hot	144-145
BOREAS B	Electric	240-241	MONZA DOUBLE	Red Hot	138-139
BOREAS B MIRROR	Electric	242-243	MONZA XL	Red Hot	147
BOREAS FLAT	Electric	256-257	MONZA XL DOUBLE	Red Hot	141
BOREAS FLAT MIRROR	Electric	260-261	MOON	Premium	125
BOREAS FLAT TOWEL HOLDER	Electric	258-259	MOON L	Premium	126
BOREAS HYBRID B	Electric	244-245	MOSCOW	Premium	94-95
BOREAS HYBRID M	Electric	254-255	MOSCOW C	Premium	96-97
BOREAS HYBRID N	Electric	238-239	MOSCOW D	Premium	98-99
BOREAS HYBRID S	Electric	250-251	MOTION	Luxury	34-35
BOREAS M	Electric	252-253	NEMO	Red Hot	142-143
BOREAS N	Electric	234-235	NEMO DOUBLE	Red Hot	136-137
BOREAS N MIRROR	Electric	236-237	NEMO XL	Red Hot	146
BOREAS NOTUS S	Electric	266-267	NEMO XL DOUBLE	Red Hot	140
BOREAS NOTUS V	Electric	262-263	NEO	Electric	274
BOREAS NOTUS Z	Electric	264-265	NILE	Red Hot	215
BOREAS S	Electric	246-247	NINOVA BATH	Red Hot	193
BOREAS S MIRROR	Electric	248-249	NIXIE	Premium	86-87
BURANO	Red Hot	152-153	NIXIE BATH	Premium	127
BURANO MIRROR	Premium	77	ODESSA	Premium	71
BURANO S	Red Hot	173	OTTO	Premium	92-93
BURTON	Red Hot	201	OTTO S	Electric	268
CASTOR	Premium	113	OZ	Premium	109
CHAMBORD	Red Hot	162-163	PAN	Red Hot	180
CHAMBORD DOUBLE	Red Hot	160-161	PAPILLION BATH	Premium	118
CIRCLES	Premium	73	PAROS	Red Hot	177
CLASH	Red Hot	185	PIANO	Luxury	22-23
COVENTRY	Ultra Slim	218	PIPETTE	Premium	102-103
CROYDON	Ultra Slim	219	PLATA	Red Hot	170-171
CURVY	Luxury	30-31	PLATA BATH	Red Hot	196
CURVY BATH	Luxury	54-55	PLATA BATH DOUBLE	Red Hot	197
DANTE	Electric	271	PLATA DOUBLE	Red Hot	168-169
DOMINO	Premium	111	PLAY BATH	Premium	121
DORA	Premium	107	PLYMOUTH	Ultra Slim	225
DUBLIN	Ultra Slim	220	QUADRATA	Red Hot	187
DUNE	Red Hot	172	QUADRO	Premium	72
ECLIPSE	Red Hot	190	REX	Ultra Slim	226
EDWARD	Red Hot	209	ROCHESTER	Ultra Slim	228-229
ELEGANS	Red Hot	189	RUMA	Premium	112
ELITE	Red Hot	175	SARP	Red Hot	135
ELVINO	Premium	82-83	SKULLY	Luxury	38-39
ELVINO BATH	Premium	120	SLIM	Red Hot	148-149
ELVINO BATH MIRROR	Premium	119	SNOWFLAKE	Luxury	50-51
ELVINO FLOOR	Premium	85	SOHO	Red Hot	206
ELVINO FLOOR DOUBLE	Premium	84	SOLEIL	Red Hot	204
ENTREE	Premium	76	SOPHIA	Premium	104-105
ETAGE	Red Hot	213	SOPHIA MIRROR	Premium	74
FAME	Red Hot	198	SOPHIA XL	Premium	106
FAME H	Red Hot	199	STEP	Red Hot	150-151
FELIX	Electric	272	STEP MIRROR	Premium	75
FLORIS	Red Hot	214	STIRLING	Ultra Slim	227
FRAME	Red Hot	200	SWING	Red Hot	181
GAIA	Premium	88-89	TALENT	Red Hot	176
GLASGOW	Ultra Slim	221	TALLIS	Red Hot	156-157
GLOBUS	Red Hot	186	TALLIS DOUBLE	Red Hot	154-155
GRACE	Red Hot	188	TALLIS MIRROR	Premium	78-79
HALO	Premium	108	TALLIS XL	Red Hot	159
HAMLETS	Ultra Slim	222	TALLIS XL DOUBLE	Red Hot	158
IBIZA	Premium	117	TERRA	Premium	123
IVOR	Red Hot	182	TERRA L	Premium	124
JACOBS F	Luxury	58-59	TRIA	Luxury	20-21
JACOBS W	Luxury	60-61	TUBO	Premium	81
KARO	Premium	80	TUBULOUS	Premium	100-101
KENSINGTON	Premium	128-129	UNICO	Premium	122
KEOPS	Premium	70	UNIQUE	Luxury	12-13
KNIGHT	Premium	110	VERO	Electric	273
LARA L	Red Hot	203	VERSAILLES	Red Hot	134
LIGNE	Red Hot	205	VESTA	Premium	90-91
LINK	Luxury	18-19	VESTA S	Electric	269
LINK FLOOR	Luxury	16-17	VICTORIA	Red Hot	210
			VINTAGE	Red Hot	211
			VIVEK	Luxury	64-65
			VIVI	Red Hot	183
			ZARA	Red Hot	208
			ZIGGY	Luxury	48-49

DEFINITIONS

These Terms and Conditions apply to Carisa Radiators Ltd (company number 09708741) (VAT number 227388681) whose principal place of business is at Unit 2, Floats Road, Roundthorn Industrial Estate, Manchester M23 9LJ. 'Buyer' and 'you' means any entity engaging in a Contract, Order, or Agreement with Carisa Radiators Limited. 'Contract, Order, or Agreement' means any Contract, Order, or Agreement between the 'buyer' and Carisa Radiators Limited with regard to the sale of goods or the provision of service subject to these terms and conditions. Any Contract, Order, or Agreement requires Carisa Radiators Limited acceptance. 'Conditions' means the terms and conditions of contract set out in this document and any special terms and conditions additional to those set out herein agreed in writing by Carisa Radiators Ltd. 'Goods' means the articles which the buyer has agreed to purchase from Carisa Radiators Limited. 'Price' means the price for the provision of services or the goods excluding carriage and VAT.

CONTRACT

Unless otherwise agreed in writing by us, these conditions shall form part of any contract based on an acceptance of this offer and no conditions inconsistent therewith shall, unless expressly agreed in writing by us, be deemed to override or vary these conditions notwithstanding their being proffered by you at a date later than this offer. These conditions shall apply not only to the present transaction but to all future business between us except in such cases as the contrary is expressly agreed in writing between us. All technical data, physical dimensions, capacities and other properties and particulars including drawings are made in good faith as being approximately correct but deviation therefrom shall not vitiate the contract nor be made the basis of any claim against us.

LEGAL INTERPRETATION

The contract between ourselves and the buyer which is subject to these conditions is to be construed and to take effect as a contract made in England and in accordance with English law and any disputes arising therefrom shall be determined in the Courts of England or, at our discretion, shall be referred to a single mutually acceptable arbitrator in accordance with the provisions of the Arbitration Act currently in force.

QUOTATIONS

All price quotations given by us are for the buyer's information only. All prices quoted are exclusive of VAT and carriage and any other duties which may become payable. All Quotations are to be regarded as "invitations to treat" only. Rates of VAT charged and other duties which may become payable and rates for carriage will be those current on the date of dispatch to the buyer irrespective of when the contract may have been formed.

PRICES

All prices and terms quoted in our price list or catalogues etc. may be changed by us without notice. All orders are accepted for delivery at the price and on the terms ruling at the date of dispatch. Prices for goods quoted are for goods delivered to a buyer in mainland England and Wales. For all deliveries elsewhere or to remote areas in the UK extra delivery and packaging charges may apply. For all other areas, and for all exports, delivery charges are subject to quotation.

PAYMENT

Unless expressly agreed between us in writing otherwise, all sales are payable net cash with order. For agreed credit accounts our invoices are to be paid within 30 days from the date of the invoice and this time condition is of the essence of the contract. In the event that payment is not made in accordance with the agreed terms, either in full or otherwise, then the whole of the account whether due or not shall become payable and become overdue and be payable forthwith. Furthermore in the event of late or non-payment in accordance with these terms and conditions (or any other terms so agreed in writing), we reserve the right to rely on the Late Payment of Commercial Debts (Interest) Act 1998, as amended by the Late Payment of Commercial Debts Regulations 2002 and charge, at a daily rate, until payment, interest upon the debt then due at the rate prevailing at the date of default (currently 8% above the prevailing Bank of England base rate) together with the late payment charges set out in the Act, until payment or sooner settlement.

TITLE

All goods sold by us whether delivered or installed or not shall remain our sole property until all payments due for the sale or supply of such goods have been paid to us. Until property in goods sold or supplied passes to the buyer the buyer shall be responsible for any damage suffered by the goods and shall take all steps necessary to keep the goods in good condition and repair and shall keep the same in safe custody and shall not improperly use the same and shall not do anything which may lead to the goods being seized by way of distress or any legal process and shall keep the goods comprehensively insured against all risks in their full price and that our interest as unpaid seller is properly recorded in the policy. Further, at all times whilst goods are in the buyer's possession but whilst the title remains vested in us, the buyer shall notify us immediately any defect arises in the condition of the goods and shall at all times allow us access to the goods for purposes of inspection and/or work to the goods and we shall be entitled (but not obliged) to carry out such work and render to the buyer such charges for such work as may be appropriate.

DELIVERY

Any date or period named by us for delivery is given in good faith as an estimate only. Whilst we will endeavor to dispatch within the period stated, such date or period is not to be of the essence of the contract, and the buyer shall be bound to accept the goods ordered when available. Unless we have specifically given an undertaking in writing with an agreed sum as liquidated damages for late delivery and the buyer has suffered loss due to our delay, we shall not be liable in any way in respect of late delivery however caused, and in any event any liability shall be strictly limited to the liquidated sum so specified. Customers within some remote rural areas should note that delivery times may be extended by up to 5 working days, or in some instances not be available. Scottish deliveries are sometimes restricted and deliveries to the following postcodes are subject to additional costs and in some cases not available at all: KW, IV, AB, DD, PH, PA. The various islands around the British Isles are also subject to similar restrictions and additional costs. Please contact Carisa Radiators to confirm costs at time of ordering. Where delivery is fixed by instalments, such instalments deliverable under the contract shall be deemed to be sold under separate contracts. Defective deliveries of one or more instalments shall not entitle the buyer to repudiate the contract with regard to any instalments remaining to be delivered. It is our responsibility to load vehicles with goods at our works. Subject to the size and weight of the goods supplied, we will deliver to the nearest hard standing provided safe access is available. Where specification of the goods prevents us from carrying out delivery as outlined above, the buyer is responsible for all necessary material handling arrangements and carrying out the safe offloading of the goods. Any damage sustained during this offloading is the responsibility of the buyer. Transportation from the hard standing unloading area thereafter is wholly the responsibility of the buyer. If, having given to the buyer notice that the goods or any part of them are ready for dispatch, and a delivery date has been agreed between the buyer and the company, we reserve the right to charge for storage in the event of this delivery date being cancelled by the buyer. Furthermore, if we do not receive forwarding instructions to enable us to dispatch within 14 days from the date thereof, the buyer shall take delivery or arrange for storage of the goods, failing which we shall be entitled to store the goods at the buyer's risk and expense, and our invoice for the goods will become immediately due for payment. Where the price includes delivery, we shall repair or replace free of charge goods damaged in transit, or any shortages, provided the buyer sends written notification within 24 hours of delivery and the delivery note states that the packaging or product is being accepted with evidence of damage. Delivery notes which are signed free of comment will be deemed to be acceptable and that the products have been delivered in proper and sound condition without visible damage. Where the price does not include delivery - and carriage is provided by the buyer - the buyer shall be responsible for any loss or damage in transit. Carriage or postage on spare parts will be prepaid and charged in full to the buyer. Where express delivery is requested by the buyer all additional costs will be charged in full to the buyer. The buyer shall inspect the goods immediately on delivery thereof and within 2 days after delivery give notice to us in writing, of any matter or reason whereof, the buyer may allege that the goods are not in accordance with the contract. If the buyer fails to give such notice the goods shall be deemed to be in all respects in accordance with the contract and the buyer shall accept and pay for the same accordingly. Any claims made by the buyer against us under the terms and conditions of our warranty (below) must be substantiated to our satisfaction and we may refuse to replace repair or credit in respect of any alleged faulty part until sufficient evidence of the validity of the claim has been presented. Where delivery is fixed by instalments, such instalments deliverable under the contract shall be deemed to be sold under separate contracts. Defective deliveries of one or more instalments shall not entitle the buyer to repudiate the contract with regard to any instalments remaining to be delivered. It is our responsibility to load vehicles with goods at our works. Subject to the size and weight of the goods supplied, we will deliver to the nearest hard standing provided safe access is available. Where specification of the goods prevents us from carrying out delivery as outlined above, the buyer is responsible for all necessary material handling arrangements and carrying out the safe offloading of the goods. Any damage sustained during this offloading is the responsibility of the buyer. Transportation from the hard standing unloading area thereafter is wholly the responsibility of the buyer.

INSTALLATION

Please fully inspect the product(s) within 48 hours of delivery and certainly before installation. Once installed no claim for damage will be accepted. All sizes quoted or published are approximate and for guidance only. Pipe centres in particular are estimates please check the allowance with your valve supplier. We do not recommend pre installation of pipe work without confirming the pipe centres with the manufacturer.

WARRANTY

Our liability in respect of any defect in or failure of the goods or for any loss injury or damage attributed thereto is limited to the cost of replacement of the goods only or the repairing of such defects which under proper use have appeared therein and arise solely from faulty design, materials or workmanship. Replacement goods are chargeable; credits will be applied where it is established that the warranty claim is valid. The period of warranty offered by us varies by product and/or related integrated components the buyer shall be entitled to the same guarantee that we have received and are able to enforce. Replacement parts will be delivered by us, to the buyer. The warranty period for any new replacement parts is limited to twelve months from the date of dispatch, or installation of the part, where said installation is carried out by our service personnel. Where faulty parts are returned to us as part of a warranty claim the original buyer must provide full details e.g. product details, and our original contract reference number along with the faulty part. Faulty goods shall not form the subject of any claim for labour costs or other expenditure incurred by the buyer and we shall not be responsible for any loss or damage arising out of any such fault. Only in exceptional circumstances, and by previous written agreement will we accept back for credit, items which have been supplied against orders or which have been manufactured in accordance with your specifications but have not yet been delivered, provided that the goods to be returned are new in original packaging and unused. Restocking charges will apply. We specifically do not accept liability for financial or consequential losses, expenses or damage occasioned by defects in manufacturing or arising from any other cause. The benefit of this warranty is given to the original buyer of the goods and is not assignable. Any goods supplied by us must be installed in accordance with the law and proof thereof shall be a pre-condition of our liability under our warranty of the goods.

CORROSION RESISTANCE

When commissioning the radiators on and closed heating system it is imperative that the appropriate and adequate inhibitor is introduced to the system to protect both your existing heating products and your new Carisa design products. A proprietary multi metal inhibitor will suffice in most cases but if you are in any doubt please seek professional advice, as incorrect or inadequate protection will render any and all warranties null and void. We reserve the right to conduct a water test to establish the level of protection provided.

BUYERS LIABILITY

Equipment is supplied only for the purpose for which it is specifically designed and which is clearly defined in the appropriate brochure or manual. We do not accept liability for damage or injury caused as a result of the equipment being used for any other purpose. In view of the many factors outside our control in respect of performance of equipment, the buyer is entirely responsible for the type of equipment purchased and for the capacity of the equipment to deal with the proposed application. We do not accept any liability for incorrect calculations incompatible designs or advice, which may result in the equipment, supplied not being suitable for the purpose for which it was purchased.

INTERPRETATION

All headings in this document are inserted for convenience and each of reference only and shall not affect the construction or interpretation of this contract. Any provision of this contract which is or may be void or unenforceable shall to the extent of such invalidity or unenforceability be deemed severable and shall not affect any other provision in this contract. No waiver or forbearance by us whether express or implied in enforcing any of our rights under the contract shall prejudice our right to do so in the future. Save as otherwise provided in these Conditions nothing in these Conditions shall create any partnership joint venture or relationship of principal and agent between the parties. Except where expressly provided for in these Conditions time shall not be of the essence of the contract.

NOTICES

Any Notice required to be given by either party or any account rendered by the Company to the buyer shall be deemed to have been given or rendered if dispatched by first class post and addressed to the buyer at the delivery address or to their respective last known business address or registered office and any such Notice or Account rendered shall be deemed to have been received 2 days after posting as aforesaid. In the alternative to the matters above any Notice required to be given by either party or any account rendered by the Company to the buyer shall be deemed to have been given or rendered if sent by facsimile transmission machine during business hours to the buyer at the facsimile number of the buyer or to the facsimile number at their respective last known business address or registered office and any such Notice or Account rendered shall be deemed to have been received if a facsimile transmission confirmation produced by such machine shows due and proper transmission.

FORCE MAJEURE

The performance of all contracts is subject to variation or cancellation by us without notice owing to any Act of God, war, strikes, lock-outs, fire, flood, drought, tempest or any other cause beyond the control of our Company or owing to any inability of the Company to procure materials or articles required for the performance of the contract and we shall not be held responsible for any inability to deliver caused by any such contingency.

All Heat outputs are indicated at $\Delta T70$ in compliance with BSEN 442. A list of correction factors is available in our specification pages to calculate the heat outputs in a range of regimes.

For full Carisa Terms and Conditions please refer to our website; www.carisa.co.uk

E&OE (Errors and omissions excepted).



CARISA TR

Showroom

📍 Bağdat Cad. No: 126/A, Feneryolu
Kadıköy, İstanbul, Türkiye
☎ +90 850 711 33 00

Factory

📍 No:10, Mermerciler Cad. 34956 Aydınlı
İAYOSB Tuzla, İstanbul, Türkiye

✉ info@carisa.com.tr
🌐 carisa.com.tr
🌐 www.carisa.com.tr

CARISA UK

📍 Unit 2, Floats Road, Roundthorn Ind. Est.,
Manchester, M23 9LJ, United Kingdom
☎ +44 (0) 1634 711 577
✉ info@carisaradiators.co.uk
🌐 carisa.co.uk
🌐 www.carisa.co.uk

CARISA FR

📍 55 Avenue Marceau
75016 Paris, France
☎ +33 1 89 16 36 21
✉ info@carisa.fr
🌐 carisa.fr
🌐 www.carisa.fr

As our policy is one of continuous product improvement, we reserve the right to alter product specification without notice. All information in this publication is given in good faith at the time of print. No responsibility can be accepted for errors, omissions or incorrect assumptions.